


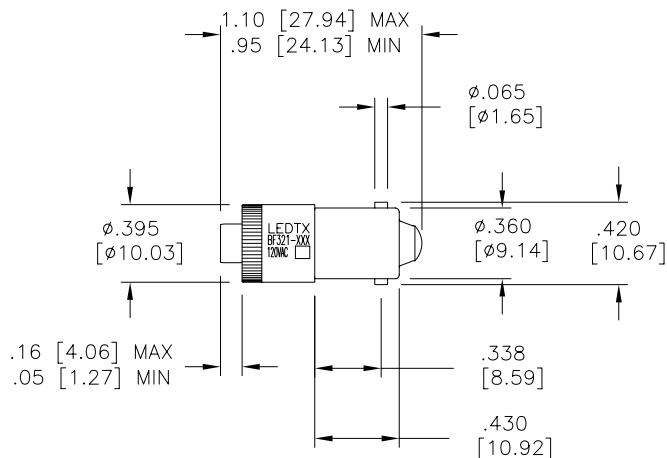

RoHS
COMPLIANT
2002/95/EC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: BRASS, NICKEL-PLATED

REVISION NOTIFICATION

- ☐ PMA
☐ UL
☐ MADE IN USA
☐ CUSTOMER _____
☐ OTHER

BF321-0AG-120A	AQUA GREEN	120VAC	4.7-5.4	0.275 cd	520	—	85°
BF321-0CW-120A	COOL WHITE	120VAC	4.7-5.4	0.550 cd	—	8000K	95°
BF321-0IW-120A	WARM WHITE	120VAC	4.7-5.4	0.086 cd	—	3000K	110°
BF321-0PB-120A	SUPER BLUE	120VAC	4.7-5.4	0.074 cd	465	—	85°
BF321-0UG-120A	SUPER GREEN	120VAC	4.7-5.4	0.029 cd	574	—	90°
BF321-0UO-120A	SUPER ORANGE	120VAC	4.7-5.4	0.065 cd	611	—	90°
BF321-0UR-120A	ULTRA RED	120VAC	4.7-5.4	0.050 cd	652	—	80°
BF321-0UY-120A	SUPER YELLOW	120VAC	4.7-5.4	0.039 cd	593	—	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	READ mA min/max	MAXIMUM CANDELA	λP nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
		ELECTRICAL TEST					

LED[®]
LEDTRONICS, INC.[™]
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°, 30°
FRACT. ± 1/32

TITLE

BF321-XXX-120A

DWG NO

BF321-120VAC

SCALE

1:1

SHEET

1 OF 1

DATE

10-19-11

CODE
IDENT NO.
8Z410

DWG BY
GP
10-19-11

CHK BY
QA

MFG

R&D
BJ

10-19-11