


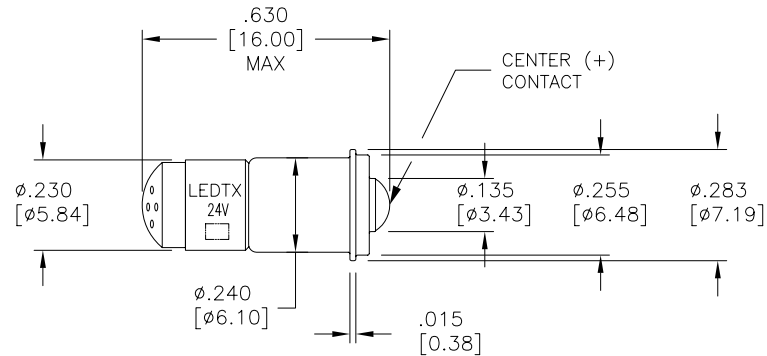

RoHS
COMPLIANT
2002/95/EC

NOTES:

1. PARTS WITH (*) ARE "RoHS" CERTIFIED.
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: BRASS & NICKEL PLATED BRASS

REVISION NOTIFICATION

- ☐ PMA
☐ UL
☐ CUSTOMER _____
☐ OTHER

F206-OAG-024V	—	AQUA GREEN	24	12-14	—	525	160°	★
F206-OPB-024V	—	SUPER BLUE	24	12-14	—	470	160°	
F206-OUR-024V	—	ULTRA RED	24	12-14	210	663	160°	
F206-OUY-024P	—	ULTRA YELLOW	24	12-14	—	593	160°	
F206-OUY-024V	—	ULTRA YELLOW	24	12-14	225	593	160°	
F206CA6-0006	F206CA6-24V-P	YELLOW	24	12-14	—	584	160°	
F206CG6-0005*	F206CG6-24V/20-P	HI-EFF GREEN	24	12-14	75	565	160°	
F206CLW7-24V-P	—	LIME WHITE	24	12-14	125	592/565	160°	
F206CLY6-0007	F206CLY6-24V/20-P	LIME YELLOW	24	12-14	—	570	160°	
F206C06-0004	F206C06-24V/20-P	ORANGE	24	12-14	—	608	160°	
F206CPG6-0007*	F206CPG6-24V/20-P	PURE GREEN	24	12-14	15	557	160°	
F206CR6-0026*	F206CR6-24V/20-P	HI-EFF RED	24	12-14	45	633	160°	
F206CR7-0002*	F206CR7-24V/20-P	ULTRA RED	24	12-14	—	657	160°	
F206CY6-0004*	F206CY6-24V/20-P	YELLOW	24	12-14	30	584	160°	
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	SET VOLTS	READ mA typ.	Iv mod typ.	λP nm	LED FULL ANGLE	
ELECTRICAL TEST								

LED[®]
LEDTRONICS, INC.[™]
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°, 30°
FRACT. ± 1/32

TITLE

F206-0XX-024X
F206CXX-00XX

DWG NO

F206-24V-P

SCALE

2:1

SHEET

1 OF 1

DATE

02-20-07

CODE
IDENT NO.
8Z410

DWG BY
GP

CHK BY
PL
01-17-08

QA

MNFG

CUSTOMER