


LTR	REVISION	DATE	APPD
A	011012-PL01: UPDATED DWG.	01-10-12	GP

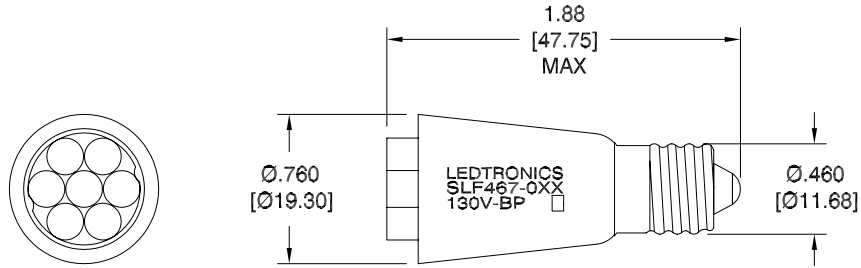

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: NICKEL PLATED BRASS

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

SLF467-OCW-130B	COOL WHITE	130VDC	10	0.595 cd	BIPOLAR DC (+/-)	68-70	8000K	90°
SLF467-OUR-130B	ULTRA RED	130VDC	10	0.280 cd	BIPOLAR DC (+/-)	-	650	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	INPUT CURRENT (mA)	MAXIMUM CANDELA	CENTER CONTACT POLARITY	CRI	λP nm	VIEWING ANGLE (FULL BEAM WIDTH AT 50% INTENSITY)
ELECTRICAL TEST								



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE SLF467-0XX-130B					
DWG NO	SCALE	SHEET	DATE		
SLF467-130V-BP	1:1	1 OF 1	04-16-07		
CODE IDENT NO. 8Z410	DWG BY MM 04-16-07	CHK BY PL 01-10-12	QA	MFG	R&D