



LTR	REVISION	DATE	APPD
-	RELEASED	02-10-12	



ACTUAL SIZE

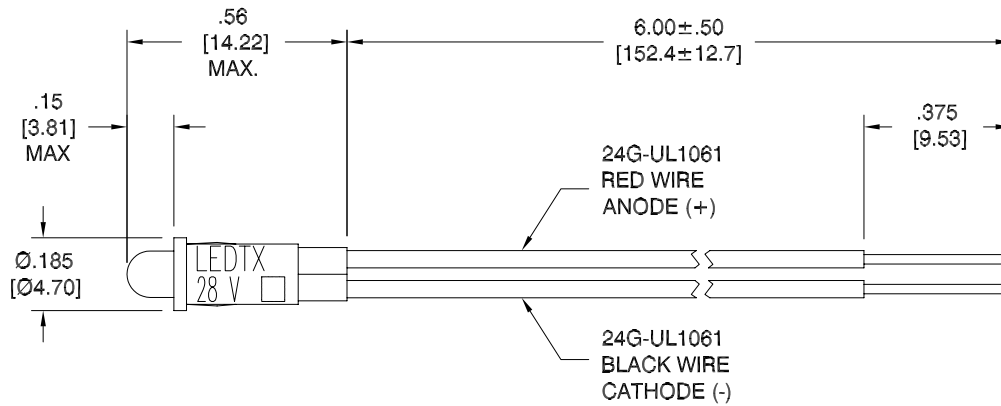

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø5/32" [4.0mm]
3. SLEEVE MATERIAL: BLACK, NYLON 66

REVISION NOTIFICATION
<input type="checkbox"/> PMA
<input type="checkbox"/> UL
<input type="checkbox"/> MADE IN USA
<input type="checkbox"/> CUSTOMER _____
<input type="checkbox"/> OTHER

PP156TG4-28V-W6	HI-EFF GREEN	28VDC	0.010-0.012 A	0.009cd	562	50°	
PP156TR4-28V-W6	HI-EFF RED	28VDC	0.010-0.012 A	0.016cd	642	55°	
PP156TY4-28V-W6	YELLOW	28VDC	0.010-0.012 A	0.012cd	582	45°	
LEDTRONICS PART NO.	COLOR EMITTED	ELECTRICAL TEST				λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
		INPUT VOLTAGE, V	CURRENT (A)	MAXIMUM CANDELA			

LED[®]
LEDTRONICS, INC.[™]
 23105 KASHIWA COURT
 TORRANCE, CA 90505

-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)
 .XX ± .025
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE PP156TX4-28V-W6						
DWG NO PP156-28VDC-W6		SCALE 2:1	SHEET 1 OF 1	DATE 02-10-12		
CODE IDENT NO. 8Z410	DWG BY GP 02-10-12	CHK BY PL 02-13-12	QA	MFG	R&D	