


LTR	REVISION	DATE	APPD
-	RELEASED	01-19-11	



**NOTES:**

1. MTG HOLE DIA: 0.63"[16MM]
2. NON-RELAMPABLE REPLACEMENT FOR GE ET5 AND ET6
3. LENS MATERIAL: POLYCARBONATE (UL 94V-2)
4. SLEEVE MATERIAL: THREADED ROD - 6061-T6 ALUMINUM, CLEAR ANODIZE
5. NUT MATERIAL: ALUMINUM 6061T6
6. WASHER MATERIAL: NEOPRENE
7. ALL DIMS ARE IN INCHES [MILLIMETERS].

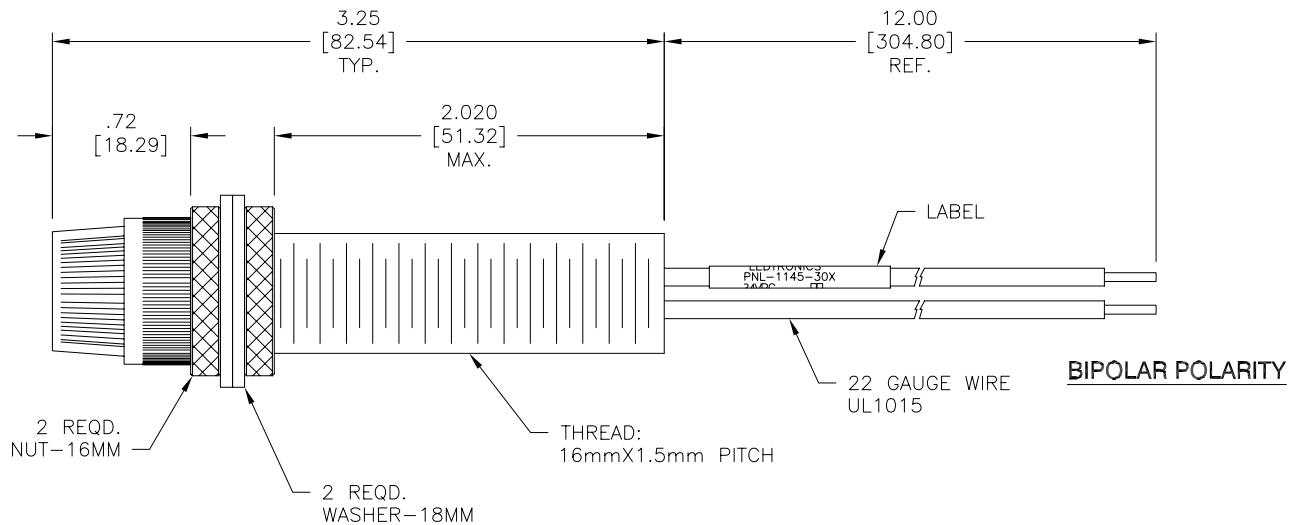

PNL-1145-301	RED	SUPER RED	637	24VDC TO 60VDC	0.010A	0.50W	0.073
PNL-1145-303	GREEN	AQUA GREEN	520	24VDC TO 60VDC	0.010A	0.50W	0.073
PNL-1145-305	WATER CLEAR	WARM WHITE	3000K	24VDC TO 60VDC	0.010A	0.50W	0.073
LEDTRONICS PART NO.	LENS COLOR	COLOR EMITTED	$\lambda_P$ nm	INPUT VOLTAGE RANGE	CURRENT (A) typ.	POWER (WATTS) typ.	WEIGHT (LBS)

**ELECTRICAL TEST**

 LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505	<b>-PROPRIETARY-</b> This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		<b>TITLE</b> PNL-1145-30X			
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0',30' FRACT. ± 1/32		DWG NO N1145009	SCALE 1:1	SHEET 1 OF 1	DATE 01-19-11
	CODE IDENT NO. 8Z410	DWG BY MM 01-19-11	CHK BY PL 01-21-11	QA	MFG	R&D