


LTR	REVISION	DATE	APPD
-	RELEASED	01-19-11	



**NOTES:**

1. MTG HOLE DIA: 0.63"[16MM]
2. NON-RELAMPABLE REPLACEMENT FOR GE ET5 AND ET6
3. LENS MATERIAL: POLYCARBONATE (UL 94V-2)
4. SLEEVE MATERIAL: THREADED ROD - 6061-T6 ALUMINUM, CLEAR ANODIZE
5. NUT MATERIAL: ALUMINUM 6061T6
6. WASHER MATERIAL: NEOPRENE
7. ALL DIMS ARE IN INCHES [MILLIMETERS].

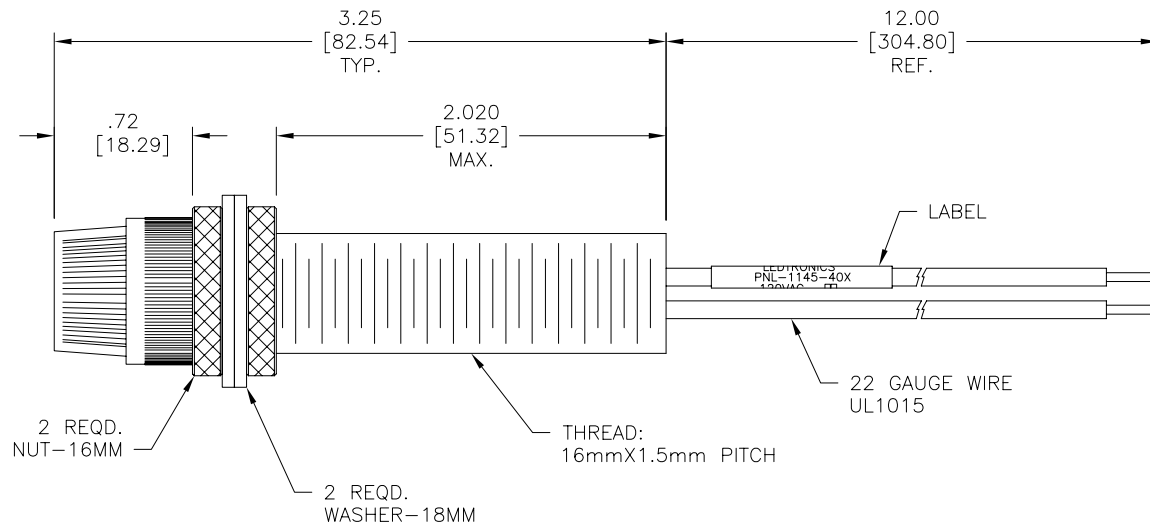

PNL-1145-401	RED	SUPER RED	120VAC	125VAC	0.006A	638	0.50W	0.073
PNL-1145-402	AMBER	SUPER YELLOW	120VAC	125VAC	0.006A	595	0.50W	0.073
PNL-1145-403	GREEN	AQUA GREEN	120VAC	125VAC	0.006A	525	0.50W	0.073
PNL-1145-405	WATER CLEAR	WARM WHITE	120VAC	125VAC	0.006A	3000K	0.50W	0.073
LEDTRONICS PART NO.	LENS COLOR	COLOR EMITTED	INPUT VOLTAGE	INPUT VOLTAGE	CURRENT (A)	λP nm	POWER (WATTS)	WEIGHT (LBS)
			typ.	max	typ.			

 LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		<b>TITLE</b> PNL-1145-40X					
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0',30' FRACT. ± 1/32		DWG NO N1145008	SCALE 1:1	SHEET 1 OF 1	DATE 01-19-11		
	CODE IDENT NO. 8Z410	DWG BY MM 01-19-11	CHK BY PL 01-20-11	QA	MFG	R&D		