


LTR	REVISION	DATE	APPD
C	011811-PL01:SEPERATED PARTS BY VOLTAGE	01-18-11	MM



NOTES:

1. MTG HOLE DIA: 0.63"[16MM]
2. NON-RELAMPABLE REPLACEMENT FOR GE ET5 AND ET6
3. LENS MATERIAL: POLYCARBONATE (UL 94V-2)
4. SLEEVE MATERIAL: THREADED ROD - 6061-T6 ALUMINUM, CLEAR ANODIZE
5. NUT MATERIAL: ALUMINUM 6061T6
6. WASHER MATERIAL: NEOPRENE
7. ALL DIMS ARE IN INCHES [MILLIMETERS].

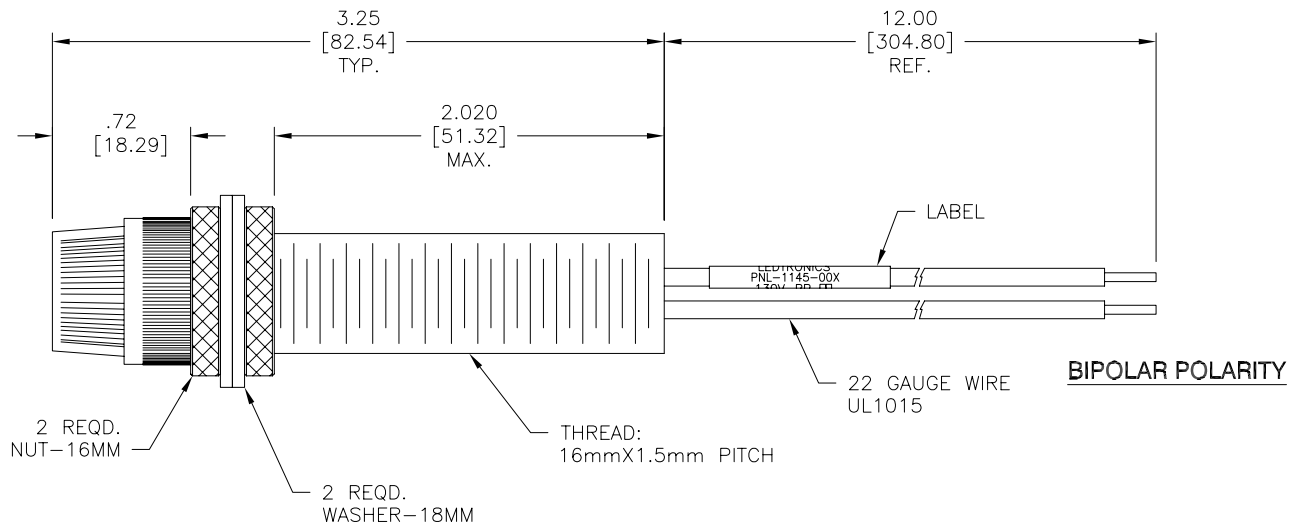

PNL-1145-001	RED	SUPER RED	120VAC 130VDC	130VAC 140VDC	0.005A 0.006A	633	0.64W 0.81W	0.073
PNL-1145-002	AMBER	SUPER YELLOW	120VAC 130VDC	130VAC 140VDC	0.005A 0.006A	595	0.64W 0.81W	0.073
PNL-1145-003	GREEN	AQUA GREEN	120VAC 130VDC	130VAC 140VDC	0.005A 0.006A	525	0.64W 0.81W	0.073
PNL-1145-004	BLUE	SUPER BLUE	120VAC 130VDC	130VAC 140VDC	0.005A 0.006A	470	0.64W 0.81W	0.073
PNL-1145-005	WATER CLEAR	WARM WHITE	120VAC 130VDC	130VAC 140VDC	0.005A 0.006A	3000K	0.64W 0.81W	0.073
LEDTRONICS PART NO.	LENS COLOR	COLOR EMITTED	INPUT VOLTAGE typ.	INPUT VOLTAGE max	CURRENT (A) typ.	λP nm	POWER (WATTS)	WEIGHT (LBS)
ELECTRICAL TEST								

 LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.		TITLE PNL-1145-00X					
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0',30' FRACT. ± 1/32		DWG NO N1145002	SCALE 1:1	SHEET 1 OF 1	DATE 10-10-02		
	CODE IDENT NO. 8Z410	DWG BY RM 10-10-02	CHK BY PL 01-20-11	QA	MFG	R&D		