


TOP VIEW



SIDE VIEW

RUBBER SEAL RING

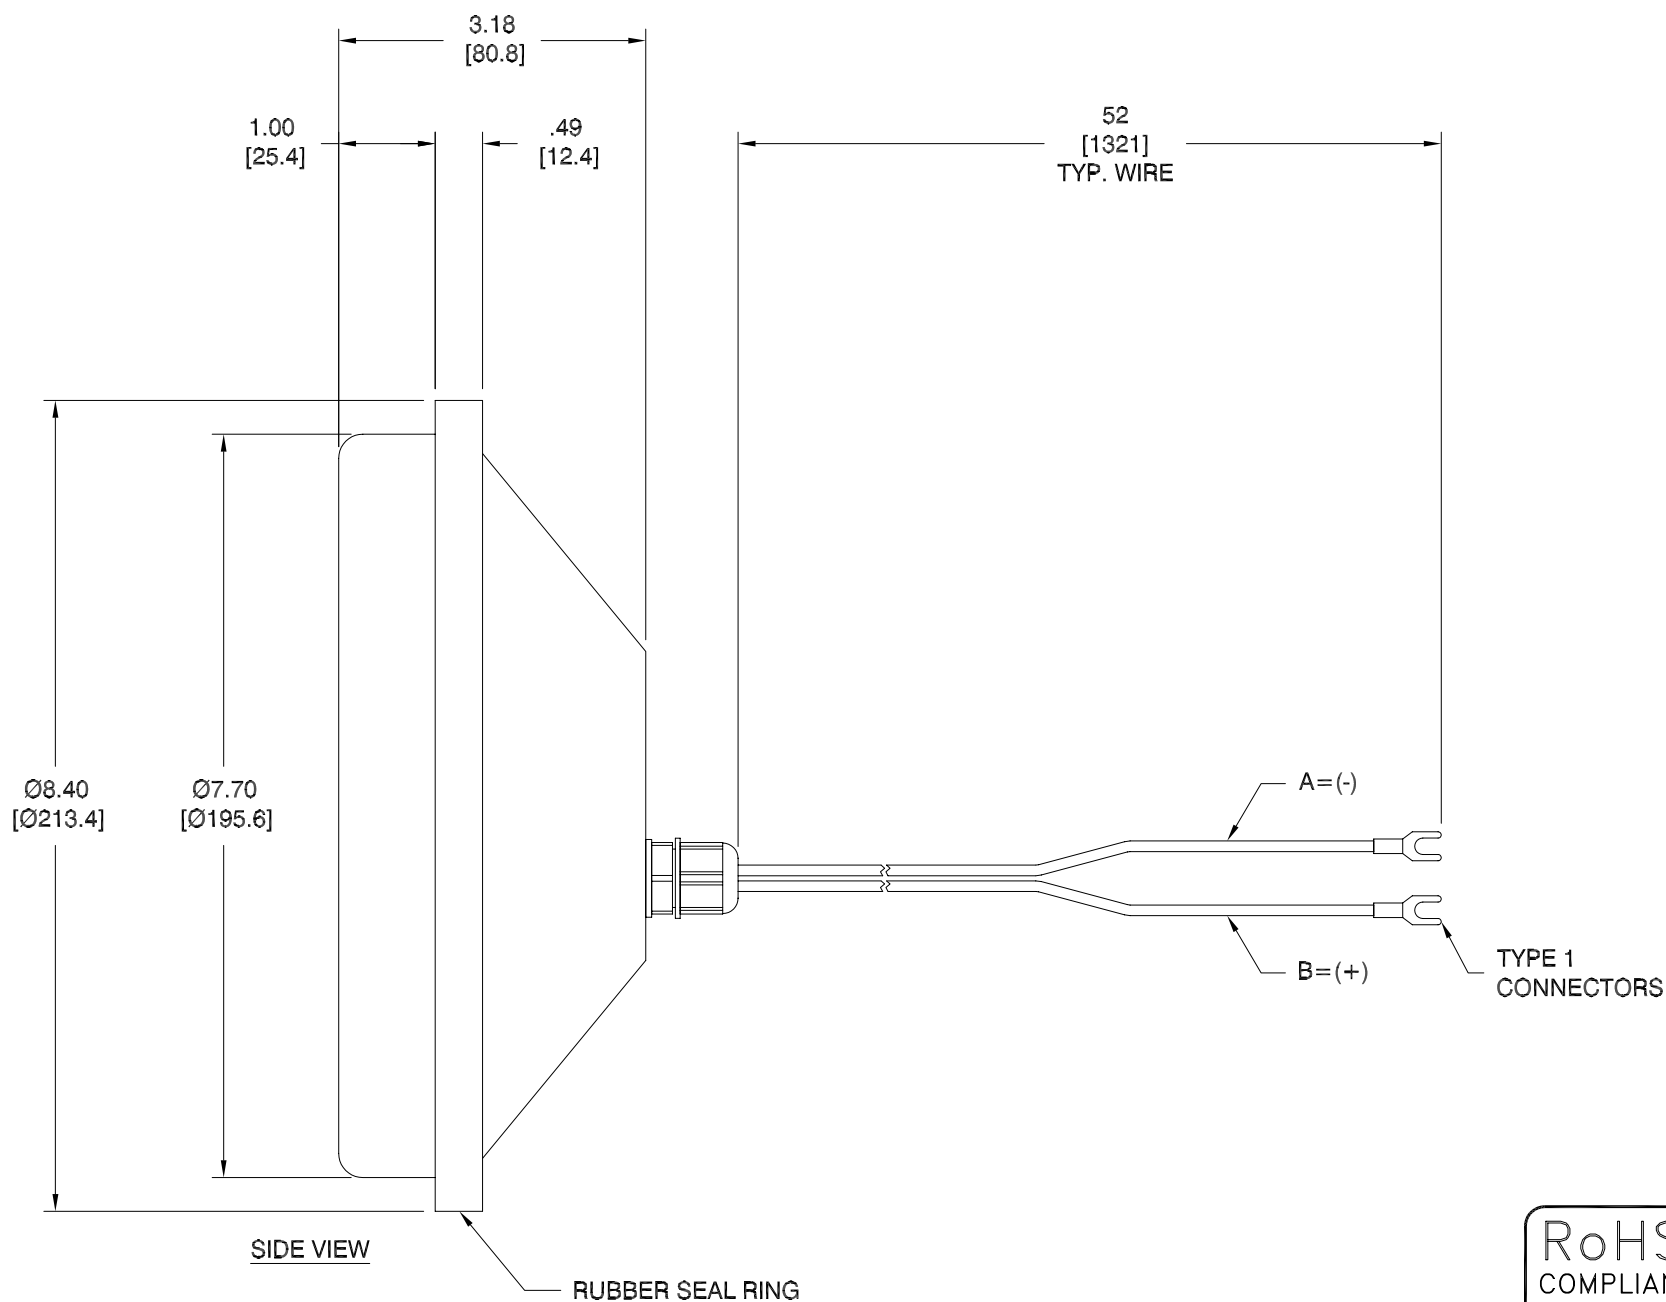

A	WHITE
B	RED, BROWN OR YELLOW
WIRE COLORS	

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

TRF108-0BG-012V	BLUE GREEN	12VDC	0.416	5W	InGaP	UV-RESISTANT POLYCARBONATE	700cd	-40°C ~ 74°C	505	8"
TRF108-0ER-012V	SUPER RED	12VDC	0.250	3W	AllnGaP		400cd	-40°C ~ 74°C	626	8"
TRF108-0PY-012V	SUPER YELLOW	12VDC	0.250	3W	AllnGaP		400cd	-40°C ~ 74°C	590	8"
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	POWER (W)	LED Chip	LENS MATERIAL	INTENSITY, cd	OPERATING TEMPERATURE	λP nm	SIZE
ELECTRICAL TEST										

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS,™ INC.
It may not be copied, used or disclosed
for any purpose without the prior, express
written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°.30'
FRACT. ± 1/32

TITLE TRF108-0XX-012V									
DWG NO TRF108-003-CUST		SCALE 1:2		SHEET 1 OF 1		DATE 12-09-11			
CODE IDENT NO. 8Z410	DWG BY GP 12-09-11	CHK BY PL 12-12-11	QA	MFG	R&D BJ 12-09-11				