




LTR	REVISION	DATE	APPD
1	PRELIMINARY	04-28-11	
2	PRELIMINARY: PART NUMBER CHANGED	06-22-11	GP
3	PRELIMINARY: UPDATED TEST DATA NOTES	04-03-12	GP
4	UPDATED TEST DATA NOTES, HEIGHT DIMENSION & ADDED HOLES	07-17-12	GP

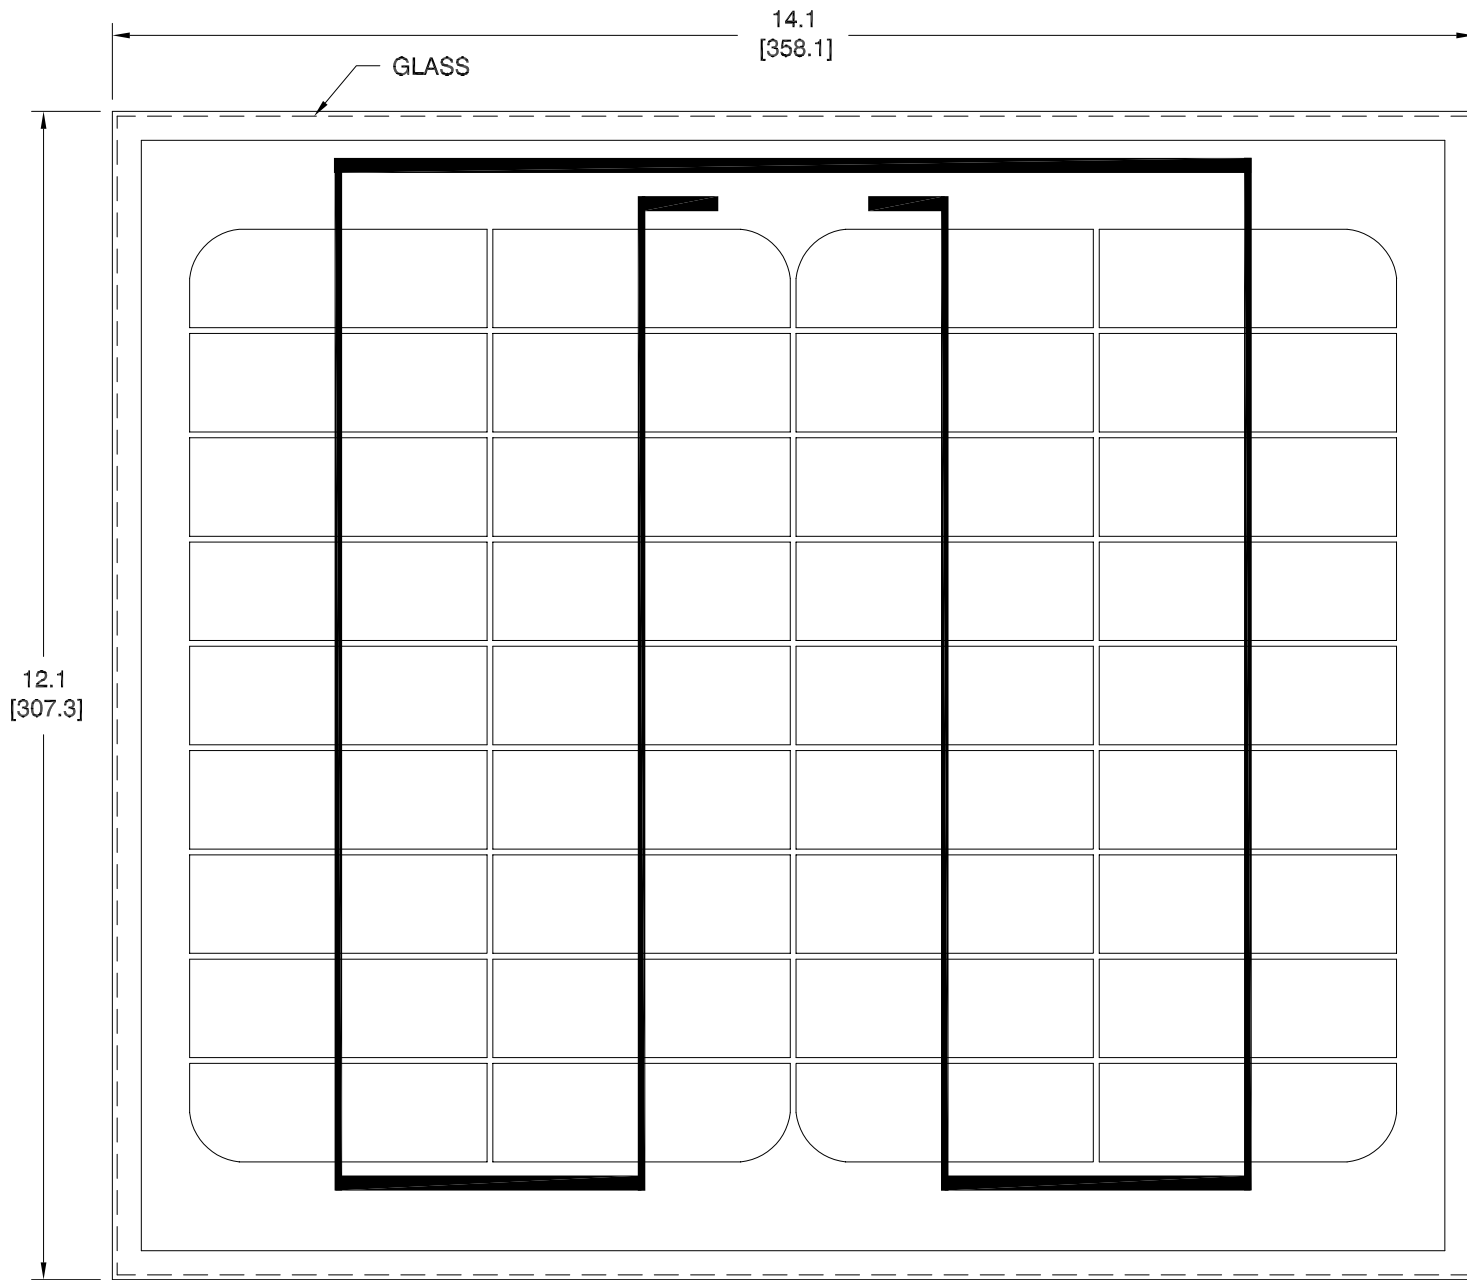

TOP VIEW

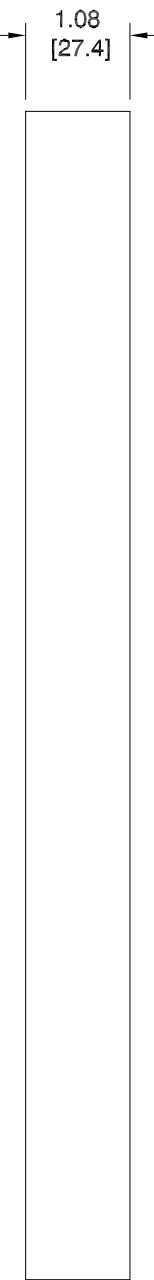

SIDE VIEW

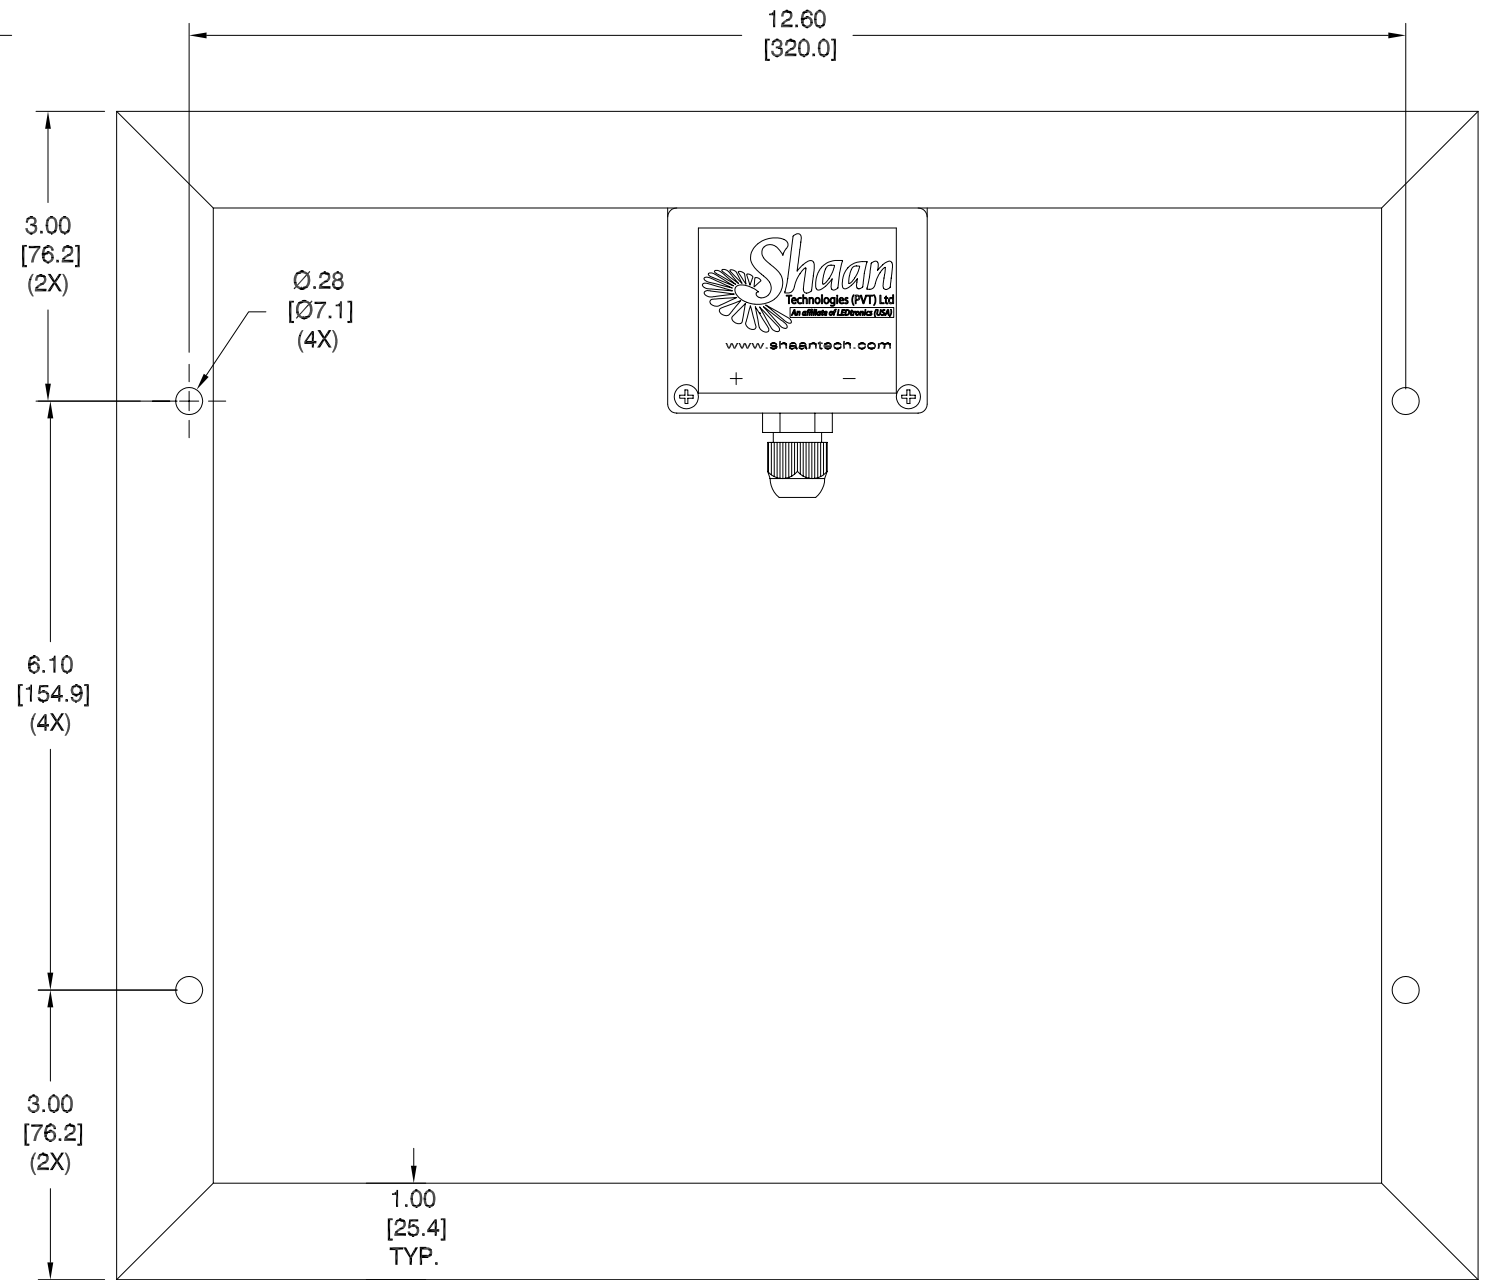

REAR VIEW

TESTING DATA

MAXIMUM POWER RATING P_{max}: 12.60 WATTS
 RATED CURRENT I_{max}: 0.84 AMPS
 RATED VOLTAGE V_{max}: 15.00 VOLTS
 OPEN CIRCUIT VOLTAGE V_{oc}: 20.5 VOLTS
 SHORT CIRCUIT CURRENT I_{sc}: 0.88 AMPS

STANDARD TEST CONDITIONS:

IRRADIANCE LEVEL: 1000 W/m²
 CELL TEMPERATURE 25°C

NOTES:

WEIGHT: 1.6kg (3.52 lbs.)

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

 LED [®] LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.		TITLE SLR-PNL-10W-101			
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°.30' FRACT. ± 1/32	DWG NO SLPNL-10W-101-CUST	SCALE 1:2	SHEET 1 OF 1	DATE 04-28-11	
	CODE IDENT NO. 8Z410	DWG BY GP 04-28-11	CHK BY PL 07-17-12	QA MFG	R&D BJ 07-17-12	