
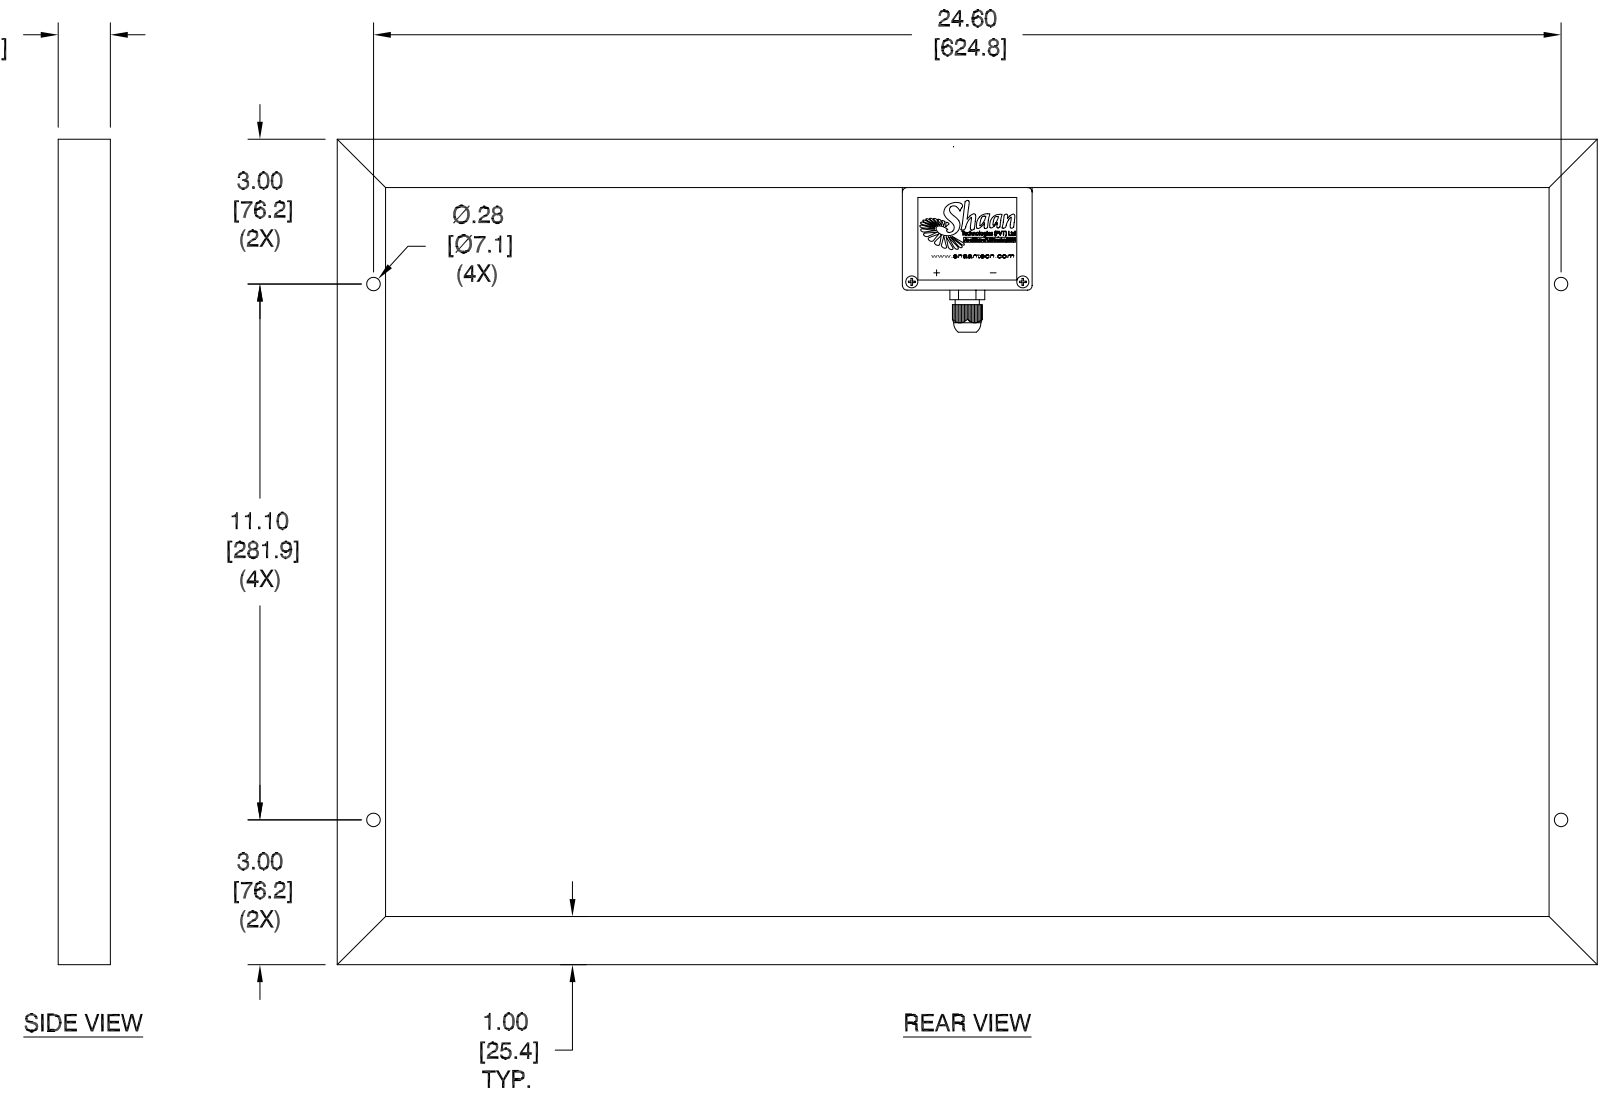


LTR	REVISION	DATE	APPD
1	PRELIMINARY	06-17-11	
2	PRELIMINARY: PART NUMBER CHANGED	06-22-11	GP
3	PRELIMINARY: UPDATED TEST DATA NOTES	03-30-12	GP
4	UPDATED TEST DATA NOTES, HEIGHT DIMENSION & ADDED HOLES	07-17-12	GP

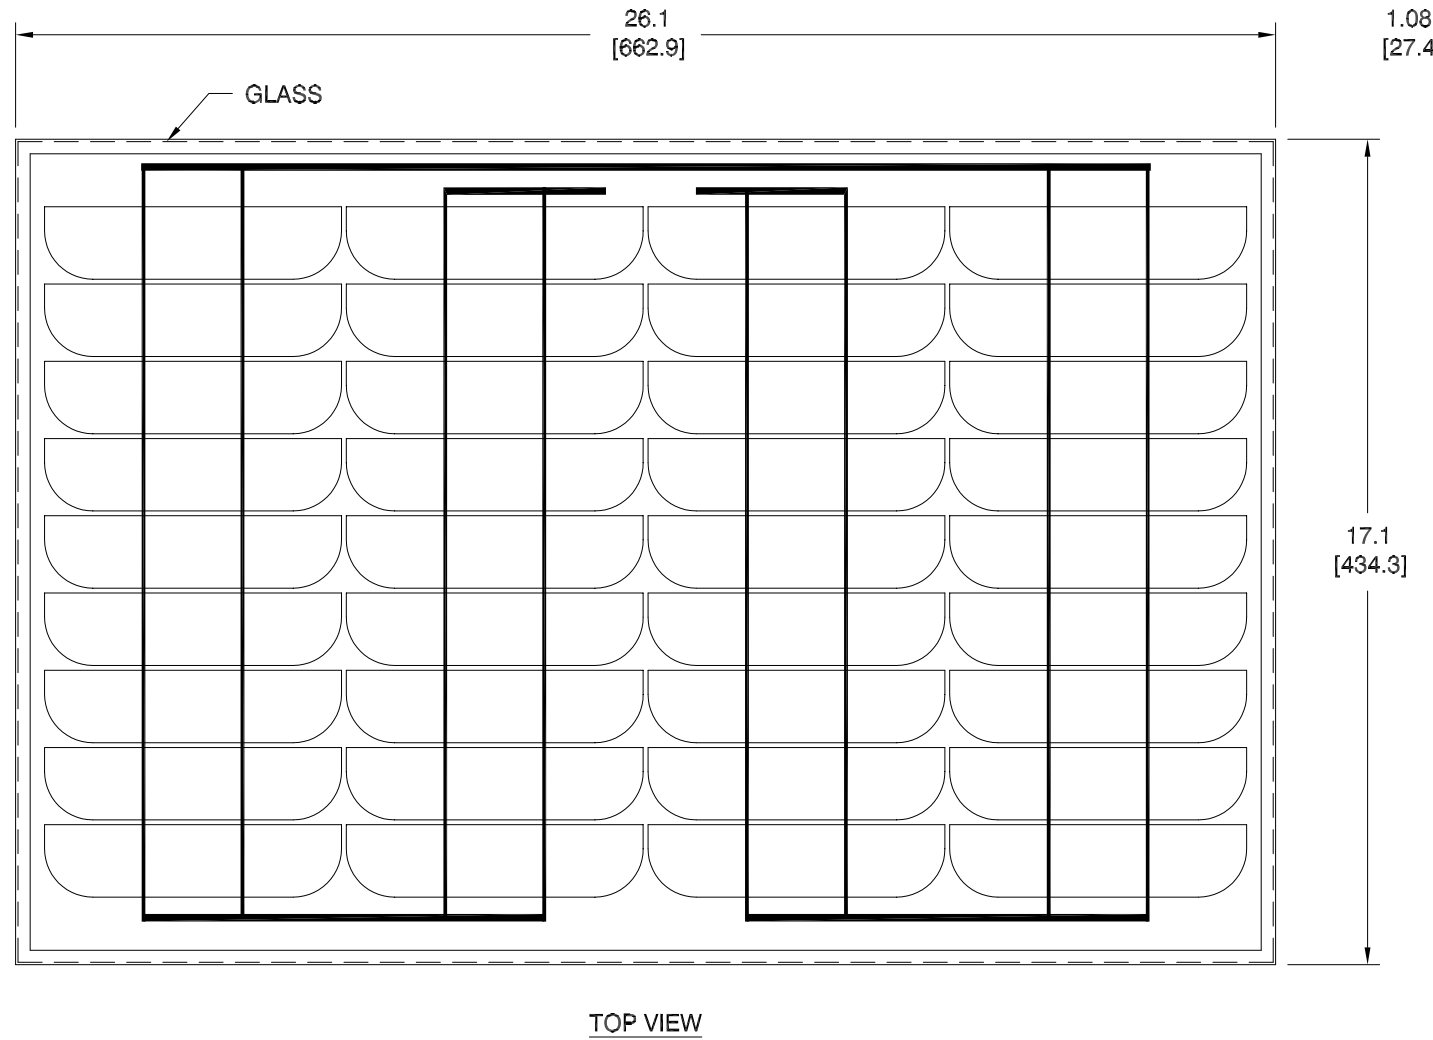

TESTING DATA

MAXIMUM POWER RATING Pmax: 36.10 WATTS
 RATED CURRENT Imax: 2.40 AMPS
 RATED VOLTAGE Vmax: 15.0 VOLTS
 OPEN CIRCUIT VOLTAGE Voc: 21.0 VOLTS
 SHORT CIRCUIT CURRENT Isc: 2.50 AMPS

STANDARD TEST CONDITIONS:

IRRADIANCE LEVEL: 1000 W/m
 CELL TEMPERATURE 25°C

NOTES:

WEIGHT: 3.50kg (7.7 lbs.)

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

 LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior, express written consent of LEDTRONICS, INC.		TITLE SLR-PNL-25W-101			
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°.30' FRACT. ± 1/32		DWG NO SLPNL-25W-101-CUST	SCALE 1:4	SHEET 1 OF 1	DATE 06-17-11
	CODE IDENT NO. 8Z410	DWG BY GP 06-17-11	CHK BY PL 07-17-12	QA MFG	R&D BJ 07-17-12	