




LTR	REVISION	DATE	APPD
1	PRELIMINARY	04-28-11	
2	PRELIMINARY: PART NUMBER CHANGED	06-22-11	GP
3	PRELIMINARY: CHG. 41.10 TO 39.60	01-20-12	GP
4	PRELIMINARY: UPDATED TEST DATA NOTES	04-03-12	GP
5	UPDATED TEST DATA NOTES, HEIGHT/WIDTH DIMENSION & ADDED HOLES	07-17-12	GP

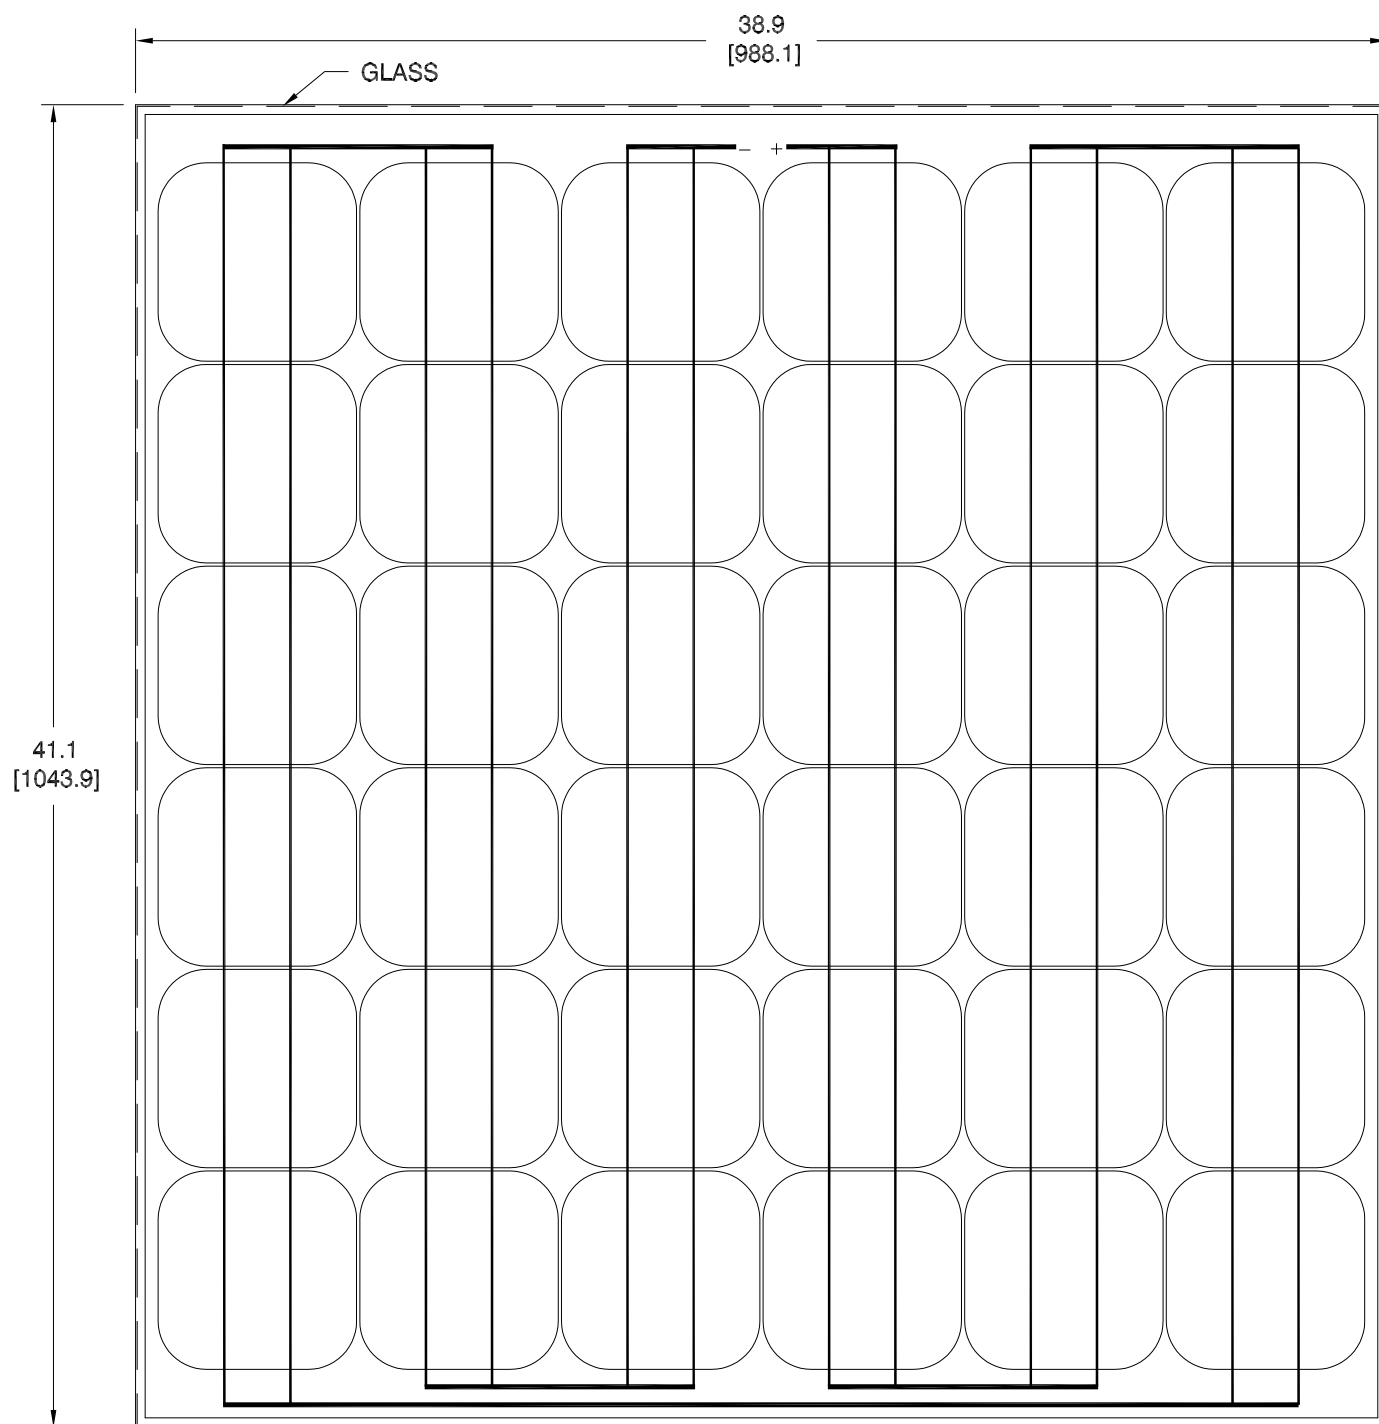

TOP VIEW

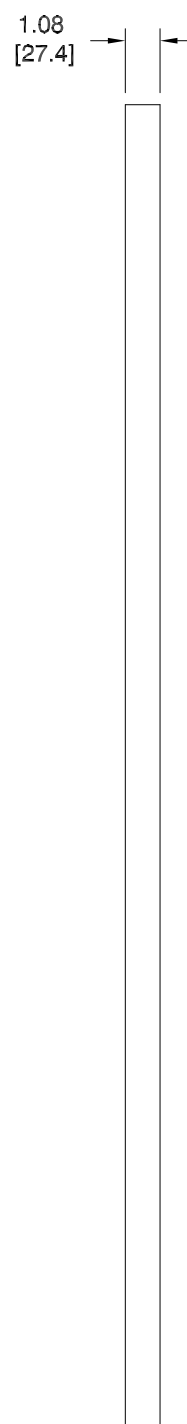

SIDE VIEW

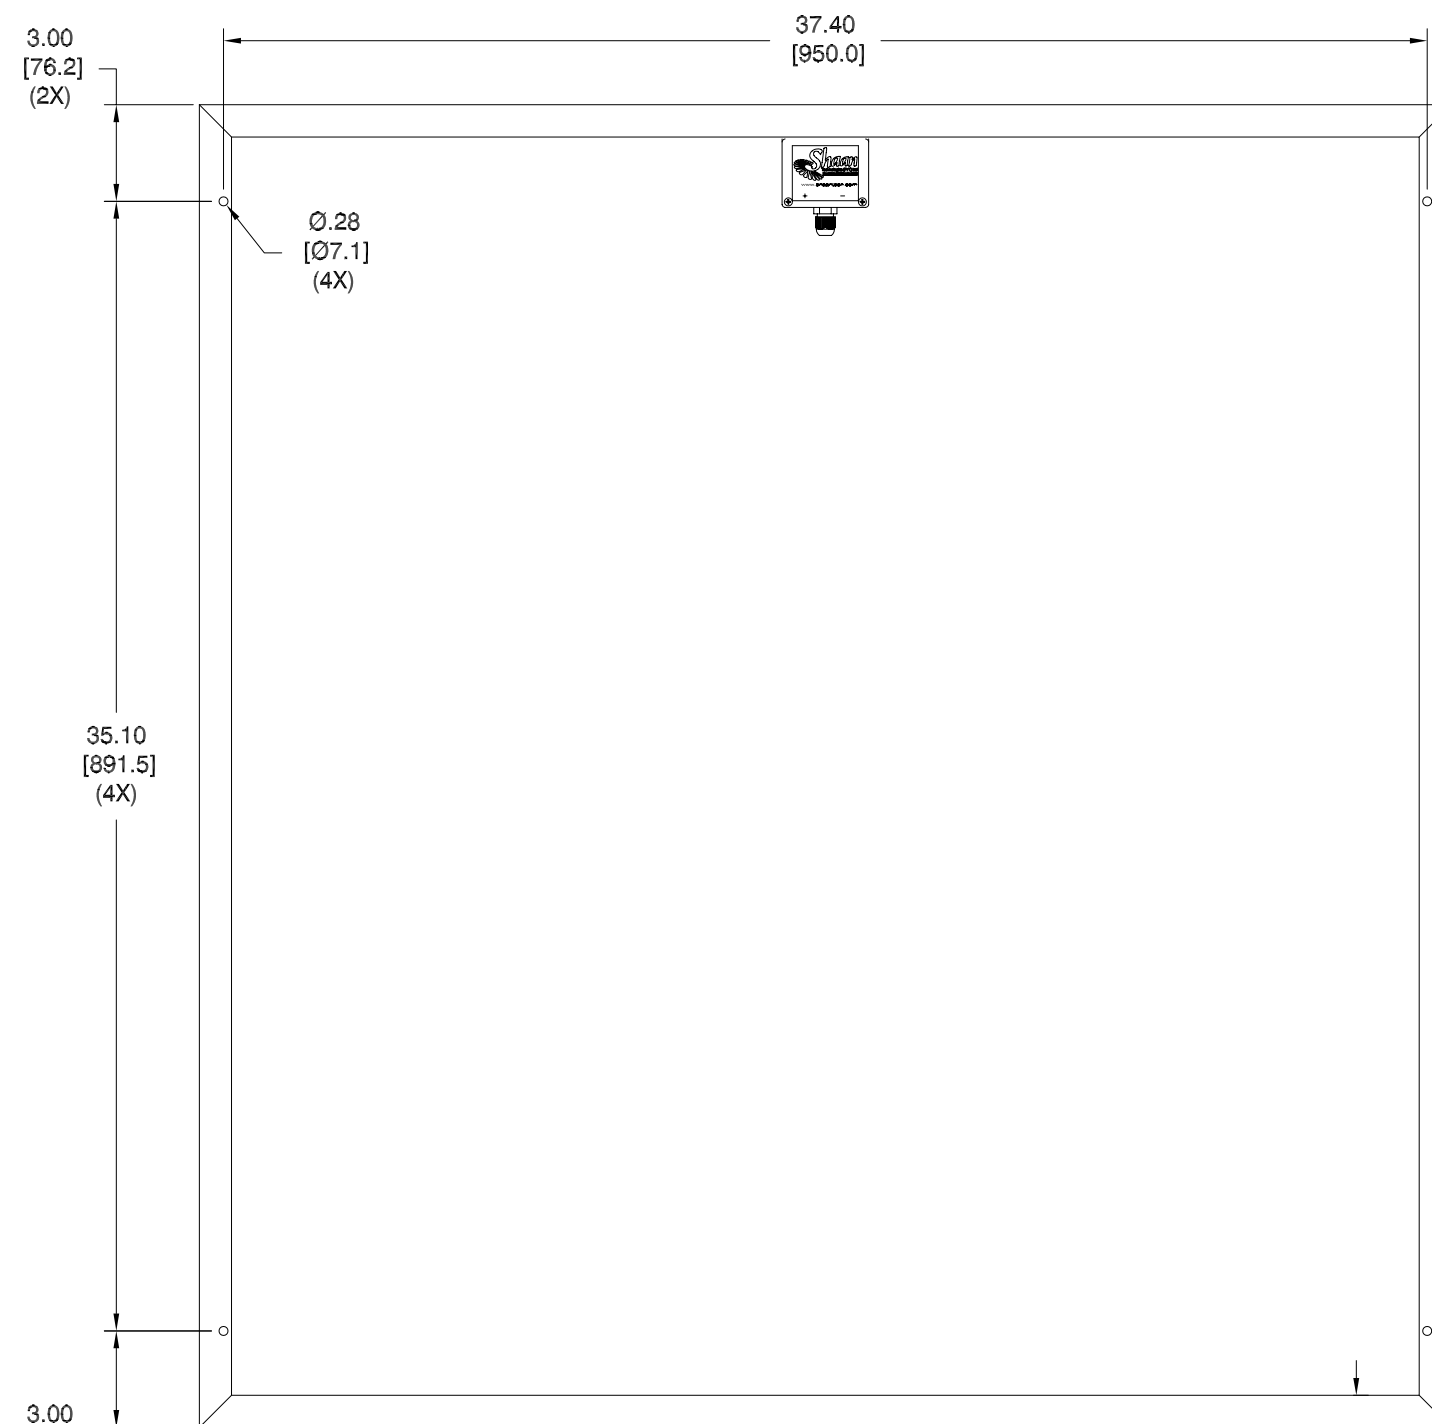

REAR VIEW

1.00 [25.4] TYP.

TESTING DATA

MAXIMUM POWER RATING Pmax: 135.0 WATTS
 RATED CURRENT I_{max}: 9.00 AMPS
 RATED VOLTAGE V_{max}: 15.00 VOLTS
 OPEN CIRCUIT VOLTAGE V_{oc}: 22.00 VOLTS
 SHORT CIRCUIT CURRENT I_{sc}: 9.00 AMPS

STANDARD TEST CONDITIONS:

IRRADIANCE LEVEL: 1000 W/m²
 CELL TEMPERATURE 25°C

NOTES:

WEIGHT: 11.15kg (24.5 lbs.)

LED[®]
LEDTRONICS,™ INC.
 23105 KASHIWA COURT
 TORRANCE, CA 90505

-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE					
SLR-PNL-100W-101					
DWG NO	SCALE	SHEET	DATE		
SLPNL-100W-101-CUST	1:6	1 OF 1	04-28-11		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP 04-28-11	PL 07-17-12			BJ 07-17-12