

L200TW3K

Diffused Cool White
5mm, Flanged Dome, 8.6mm Height
55° viewing angle

DWG BY:
LL / JG
12-27-06

CHK BY:
PL
01-17-07

QA:

__-__-__

MFG:

__-__-__


REVISION LTR: -

01-16-07

Features:

- ◆ High intensity
- ◆ Standard 5mm diameter package
- ◆ Tinned leads
- ◆ Pb-free

Package Dimensions:

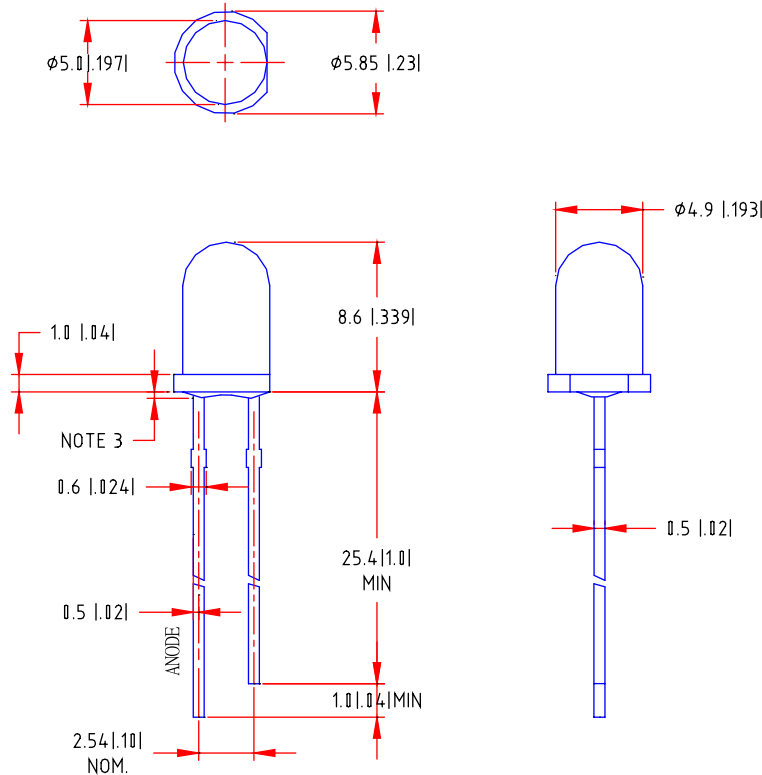

Part No.	Chip Material	Lens Color	Emission Color
L200TW3K	InGaN	White Diffused	White

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.0mm (.04") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.
6. Precautions for ESD: Static electricity and surge can damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Absolute Maximum Ratings at Ta=25°C

Parameter	MAX.	Unit
Power Dissipation	80	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current	20	mA
Derating Linear From 50°C	0.4	mA/°C
Reverse Voltage	5	V
Electrostatic Discharge (ESD)	600	V
Operating Temperature Range	-20°C to +80°C	
Storage Temperature Range	-30°C to +100°C	
Lead Soldering Temperature [4mm(.157") From Body]	260°C for 5 Seconds	

Electrical Optical Characteristics at Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _V	---	3000	---	mcd	I _F =20mA (Note 1)
Viewing Angle	2θ _{1/2}	---	55	---	Deg	(Note 2)
Forward Voltage	V _F	---	3.2	4.0	V	I _F =20mA
Reverse Current	I _R	---	---	50	μA	V _R =5V
Spherical Candlepower	SCP	---	---	---	SCP	---
Lumens	---	---	---	---	lm	I _F =20mA
Radiant Intensity	I _e	---	10.5	---	mW/sr	I _F =20mA
Color Rendering Index	CRI	---	---	---	---	I _F =20mA
Average Chromaticity	x	---	.28	---	---	I _F =20mA
	y	---	.28	---		


Color Rank	x	y	x	y	x	y	x	y
BIN C	0.2414	0.2307	0.2616	0.2698	0.2843	0.2429	0.2692	0.2176
BIN D	0.2616	0.2698	0.2816	0.3083	0.2994	0.2684	0.2843	0.2429

Notes:


- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- θ_{1/2} is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- Forward voltage measurement allowance is ±0.1V
- Luminous Intensity Measurement Allowance is ±10%

Typical Electrical / Optical Characteristics Curves
 (25°C Ambient Temperature Unless Otherwise Noted)


CIE 1931 Chromaticity Diagram

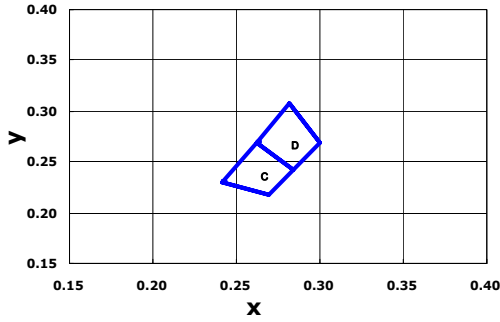


Spectral Radiance

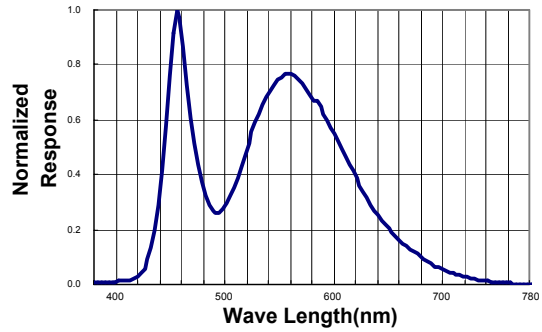


Relative Luminous Intensity vs Forward Current

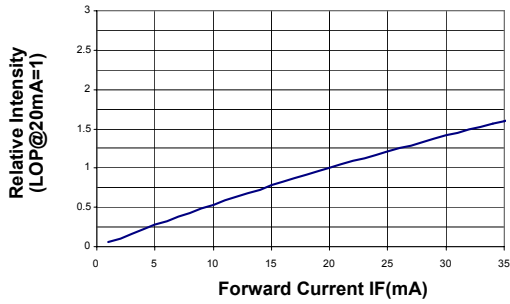


Forward Current vs Forward Voltage

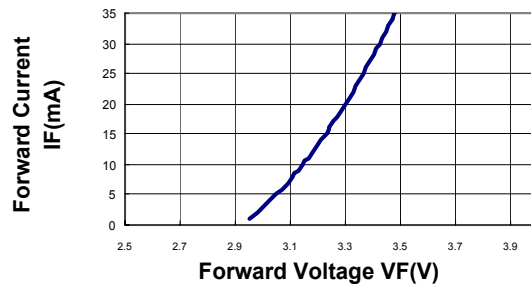

Forward Current VS. Chromaticity coordinate

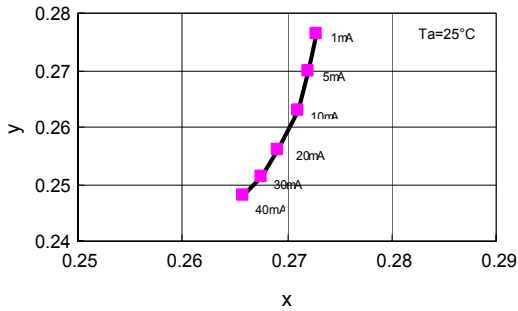

Forward Current Derating Curve

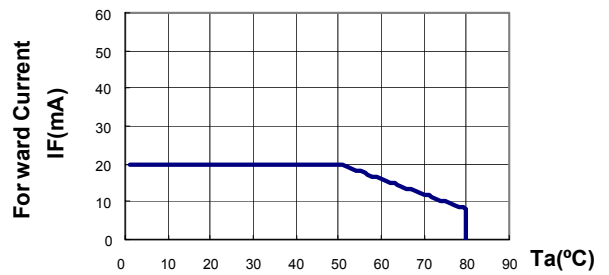

Beam Pattern

