



LTR	REVISION	DATE	APPD
C	REVISED PER ECR 081798-SA02	08-17-98	SA
D	REVISED PER ECR 052803-JH01	05-30-03	WB
E	REVISED PER ECR 011204-JH02	01-22-04	WB

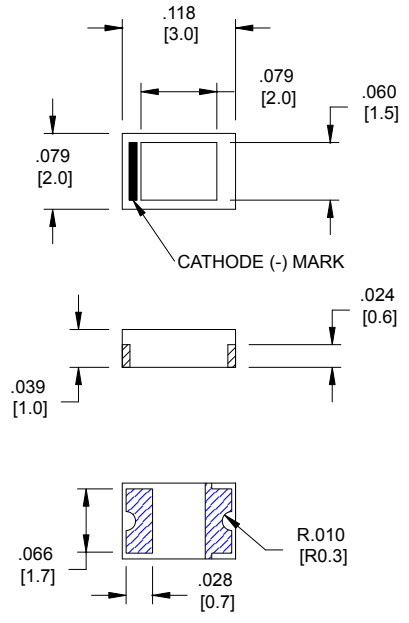

LEDTRONICS PART NO.	L.E.D. RADIATION COLOR	ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)				
		If=mA typ	Iv mcd typ	Vf=V typ/max	VIEW ANGLE	λP nm
SML1004C-TR	ORANGE	20	18	2.0/2.6	125	610
SML10G4C-TR	HI-EFF GREEN	20	20	2.2/2.5	125	565
SML10Y4C-TR	YELLOW	20	12.5	2.1/2.5	125	580
SML10PG4C-TR	PURE GREEN	20	1.8	2.2/2.6	125	555

- NOTES:
- 7 INCH REEL - 3000 PIECES PER REEL.
 - THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLES.

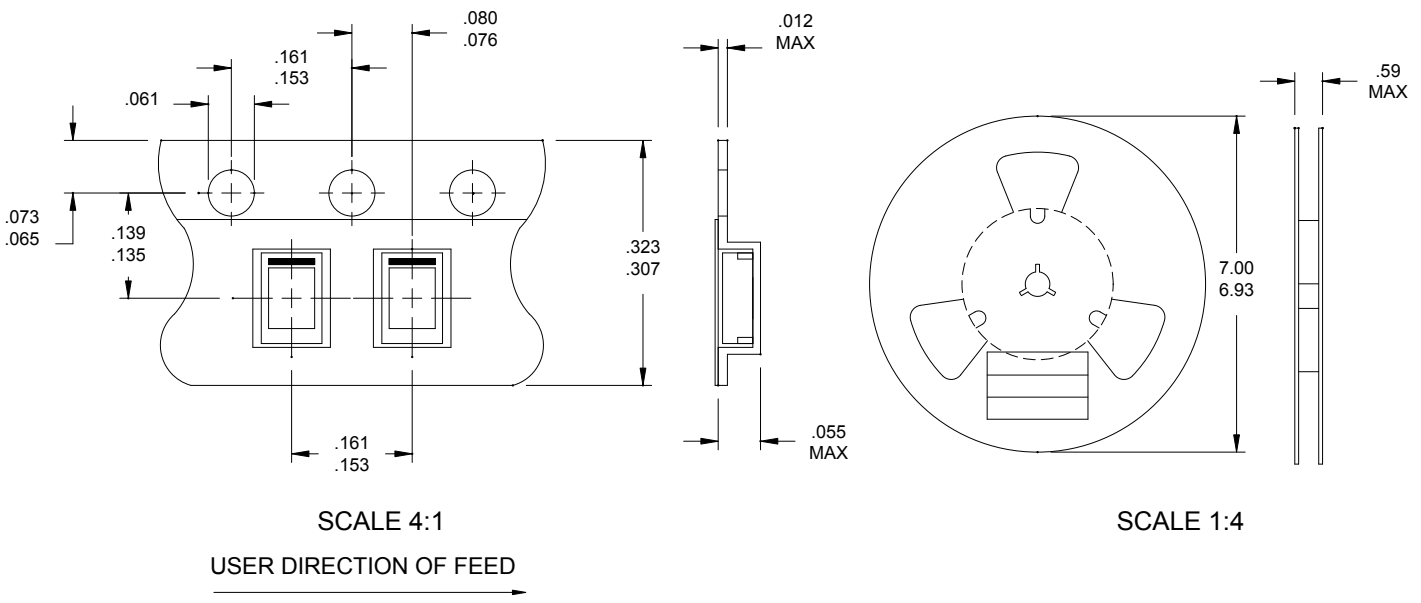

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC.™ It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.™

XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°, 30'
FRACT. ± 1/32

TITLE SML10X4C-TR					
DWG NO DSTR0016	SCALE 5:1	SHEET 1 OF 1	DATE 05-21-96		
CODE IDENT NO. 8Z410	DWG BY SMA	CHK BY	QA JCH 02-04-04	MFG SB 01-29-04	CUSTOMER