



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424
E-mail: webmaster@ledtronics.com
Website: <http://www.ledtronics.com>

STP301S-1X2-0ER-012V

Red

42 x15.6 x5mm Module

DWG BY:
GP
08-29-08

CHK BY:
PL
08-29-08


REVISION LTR: -

08-29-08

(Product Surface Chart)



(Product Framework Dimension Chart)

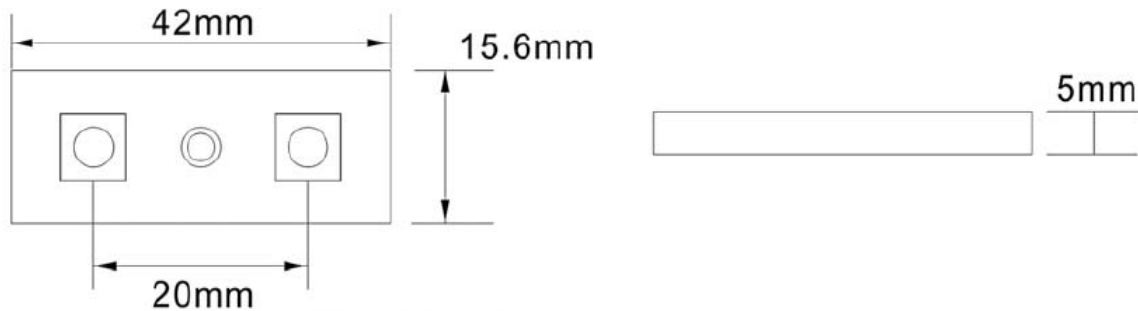

(Features)

- MODULE TO MODULE ON CENTERS: 110mm (4.3in)
- EXISTING TAPE ON BACKSIDE OF MODULE
- MOUNTING SCREWS (NOT INCLUDED)
- WIRE: WHITE (+), BLACK (-), 22AWG
- CAN RUN 1 LED MODULE UP TO 175 LED MODULES MAX.
- UL RECOGNIZED FILE No. E320022
- INPUT VOLTAGE: DC12V
- OUTPUT POWER: 0.5Wx100pcs
- BEAM ANGLE: 140°
- LIGHT SOURCE: 2x0.25W 5151 LED
- OUTPUT CURRENT: 40mAx100pcs
- BODY TEMPERATURE: 10°C
- LED WORKING TEMPERATURE: -30°C TO -80°C
- COLOR: RED
- NO UV OR IR RADIATION
- SAFETY ASSURANCE: CE & RoHS

Optical Characteristics ATLP=20mA Output Power: 0.5W

Color	Operating Voltage	Rated Current	Rated Power	Size	Color Temperature	Viewing Angle	Luminous Intensity
Red	DC12V	40mA	0.5W	42*15.6*5(mm)	633	140°	3 Lm