
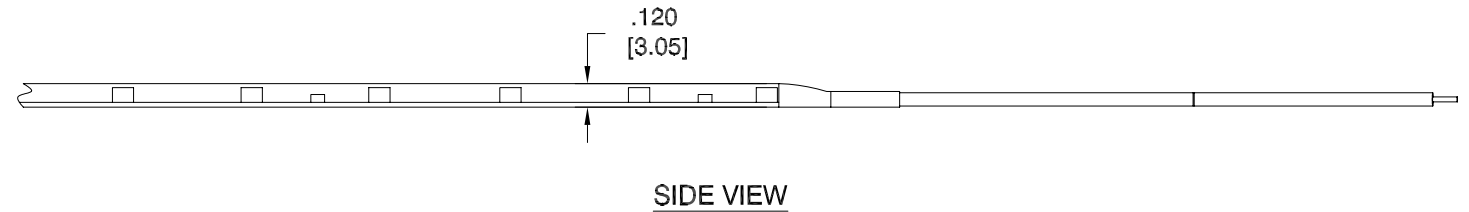


LTR	REVISION	DATE	APPD
1	PRELIMINARY	04-17-12	

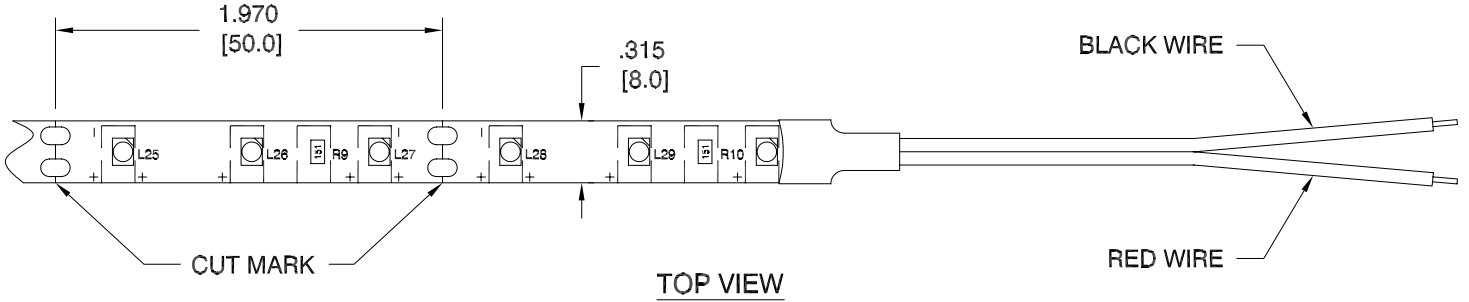

**RoHS**  
 COMPLIANT  
 2002/95/EC

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. LENGTH: 5M /ROLL
3. LED QTY. /M: 60 LEDs /M
4. WATERPROOF IP65

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

PLT08-3528-60-0AG-012V-WP	GREEN	12VDC	4.8W/M	240 lm/M	5 meters	520-525	120°	IP65
PLT08-3528-60-0ER-012V-WP	RED	12VDC	4.8W/M	90 lm/M	5 meters	620-630	120°	IP65
PLT08-3528-60-0PB-012V-WP	BLUE	12VDC	4.8W/M	60 lm/M	5 meters	465-470	120°	IP65
PLT08-3528-60-0PW-012V-WP	PURE WHITE	12VDC	4.8W/M	300 lm/M	5 meters	5500K~6500K	120°	IP65
PLT08-3528-60-0PY-012V-WP	YELLOW	12VDC	4.8W/M	90 lm/M	5 meters	590-595	120°	IP65
PLT08-3528-60-0WW-012V-WP	WARM WHITE	12VDC	4.8W/M	240 lm/M	5 meters	2800K~3500K	120°	IP65
LEDTRONICS PART NO.	LED COLOR	INPUT VOLTAGE, V	MAX WATTS /METER	LUMENS /METER	RUN LENGTH (max)	$\lambda$ P nm COLOR TEMP. (Kelvin)	BEAM ANGLE	IP GRADE

LED<sup>®</sup>

LEDTRONICS,™ INC.

23105 KASHIWA COURT  
TORRANCE, CA 90505

-PROPRIETARY-

This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)  
.XX ± .025  
ANGLES ± 0°,30'  
FRACT. ± 1/32

TITLE							
PLT08-3528-60-0XX-012V-WP (12VDC, WATERPROOF)							
DWG NO		SCALE		SHEET		DATE	
CMMS0791-CUST		1:1		1 OF 1		04-17-12	
CODE IDENT NO.	DWG BY GP	CHK BY PL	QA	MFG	R&D		
8Z410	04-17-12	04-17-12					