
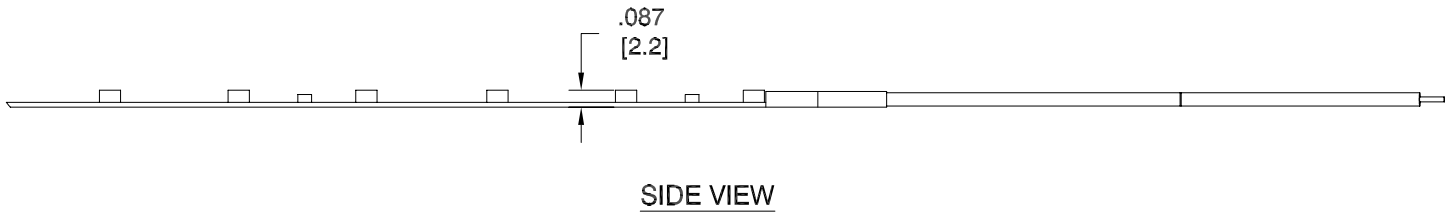


LTR	REVISION	DATE	APPD
1	PRELIMINARY	04-17-12	

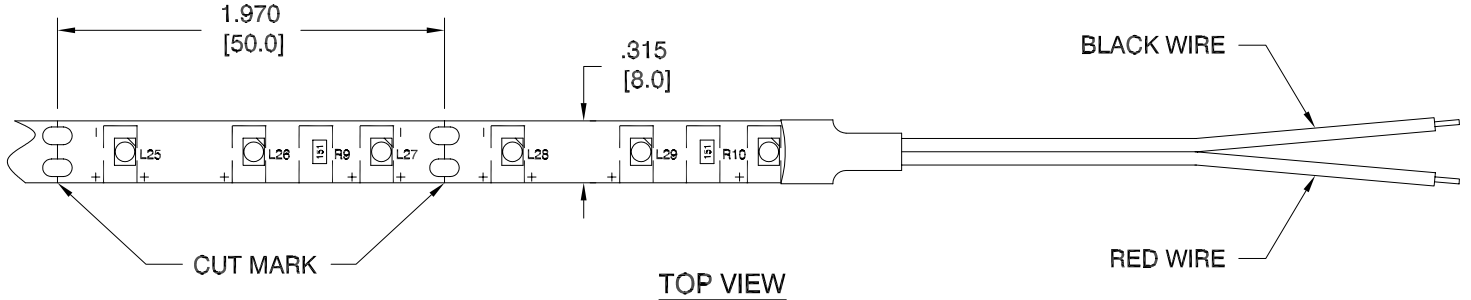

RoHS
 COMPLIANT
 2002/95/EC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. LENGTH: 5M /ROLL
3. LED QTY. /M: 60 LEDs /M
4. NON-WATERPROOF IP33

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

PLT08-3528-60-0AG	GREEN	12VDC	4.8W/M	240 lm/M	5 meters	520-525	120°	IP33	
PLT08-3528-60-0ER	RED	12VDC	4.8W/M	90 lm/M	5 meters	620-630	120°	IP33	
PLT08-3528-60-0PB	BLUE	12VDC	4.8W/M	60 lm/M	5 meters	465-470	120°	IP33	
PLT08-3528-60-0PW	PURE WHITE	12VDC	4.8W/M	300 lm/M	5 meters	5500K~6500K	120°	IP33	
PLT08-3528-60-0PY	YELLOW	12VDC	4.8W/M	90 lm/M	5 meters	590-595	120°	IP33	
PLT08-3528-60-0WW	WARM WHITE	12VDC	4.8W/M	240 lm/M	5 meters	2800K~3500K	120°	IP33	
LEDTRONICS PART NO.	LED COLOR	INPUT VOLTAGE, V	MAX WATTS /METER	LUMENS /METER	RUN LENGTH (max)	λP nm		BEAM ANGLE	IP GRADE
						COLOR	TEMP. (Kelvin)		

LED[®]

LEDTRONICS,™ INC.

23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-

This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)
.XX ± .025
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE PLT08-3528-60-0XX (12VDC, NON-WATERPROOF)							
DWG NO CMMS0817-CUST		SCALE 1:1		SHEET 1 OF 1		DATE 04-17-12	
CODE IDENT NO. 8Z410	DWG BY GP 04-17-12	CHK BY PL 04-17-12	QA	MFG	R&D		