


SSI-LXR5010SISUGW3


CAUTION: PRESSURE SENSITIVE ASSEMBLY AVOID APPLYING PRESSURE TO LED DURING PANEL ASSEMBLY.



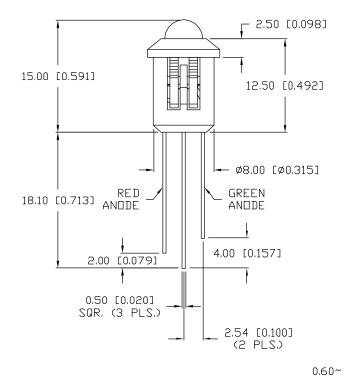



PANEL CUTOUT



ELECTRO-OPTICAL CHA	RACTERISTICS	TA=25°C	$I_{f} = 20$	mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		636 (RED)		nm	
	!	574 (GREEN	>	nm	
FORWARD VOLTAGE (R/	G)	2.0/2.2	2.5/2.6	Vf	
REVERSE VOLTAGE	5.0			V_{r}	Ir=100µA
AXIAL INTENSITY (R/	G)	200/50		mcd	If = 20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED/GREEN				
EPOXY LENS FINISH:	MILKY WHITE	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(R/G)	30/25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING, STORAGE TEMP.		-40 TO +85	°Ć
SOLDERING TEMP.		+ 260	°C
2.0mm FROM BODY			3 SEC. MAX

* t<10uS

NOTES:

- 1. SSL-LX5099SISUGW, RED/GREEN LED.
- 2. SSH-RTF5010, BLACK HOLDER.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003), MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.000 (±0.000), MIN= +DECIMAL PRECISION ARE: X=±0.00

PART NUMBER SSI-LXR5010SISUGW3

T-5mm, AllnGaP RED/GREEN LED PANEL INDICATOR, MILKY WHITE DIFFUSED LENS, COMMON CATHODE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

APPROVED BY: DATE:

5.16.03 PAGE: 1 OF 1 SCALE: N/A

REV.

CHECKED BY: