DATE	REVISIONS		
11-3-97	E.C.N. #10BRDR. & #10394./	Α	

drawing number
SSF-LXH25780YD

rev A

ELECTRO-OPTICAL CHARACTERISTICS TA =25°C If =20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH FORWARD VOLTAGE REVERSE VOLTAGE AXIAL INTENSITY VIEWING ANGLE EMITTED COLOR: EPOXY LENS FINISH:	5.0 YELLOW YELLOW	585 (YELLOW) 2.1 9 110 DIFFUSED	2.5	nm Vf Vr mcd 2x theta	I _r =100uA I _f =20mA

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-40 TO +85	•ć
SOLDERING TEMP.	+260	·č
2.0mm FROM BODY		3 SEC. MAX

^{*} t<10uS

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

INCORPORATED

290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (847) 359–2790


CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED.
EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF
THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT
SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

 DATE:
 2-17-93
 DWN:
 CHK'D:
 APPD:

 SCALE:
 N/A

2.5mm x 7mm RECTANGULAR, RIGHT ANGLE LED, YELLOW DIFFUSED.

				DRAWING NUMBER	REV
PAGE	1	OF	1	SSF-LXH25780YD	Α

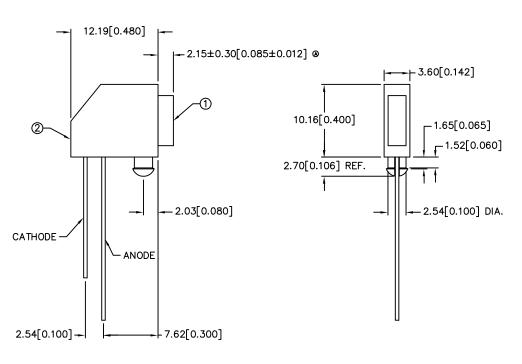

NOTES:

- 1. SSL-LX25783YD LED.
- 2. SSH-LXH25780 HOLDER, BLACK.

UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±.25mm (±0.010")