



DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: FEMALE TERMINAL


PART NO: 3000H19/-5

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H19A-5	.020 ±.001 THK. BRASS PRETINNED	SEE MAT'L	YES
3000H19AB-5	.020 ±.001 THK. BRASS	NONE	YES
3000H19AD-5	.020 ±.001 THK. BRASS	ELECTRO-TIN	YES
3000H19J-5	.018 ±.001 C.R. STEEL	NICKEL PLATE	NO

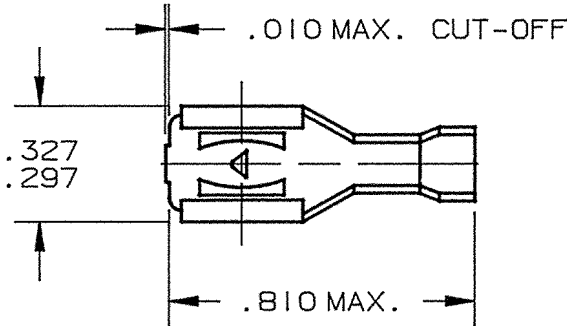


- NOTES:
- 1. TO FIT STANDARD .250 X .032 MALE TAB.
 - 2. TO ACCEPT #14-#20 GAUGE WIRE.
INSULATION RANGE: .075-.150 DIA.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ±1/32
 - 4. FOR PARTS LESS DIMPLE ADD SUFFIX "-3" TO PART NUMBER. (I.E. 3000H19A-5-3)
 - 5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
 - 6. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H19A-5-1)
 - 7. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M68H-1.
 - 1ST INSERTION: 12.0 LBS MAX.
6.0 LBS MIN.
 - 1ST WITHDRAWAL: 17.0 LBS MAX.
6.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL
 - 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL

ARK-LES
UNCONTROLLED

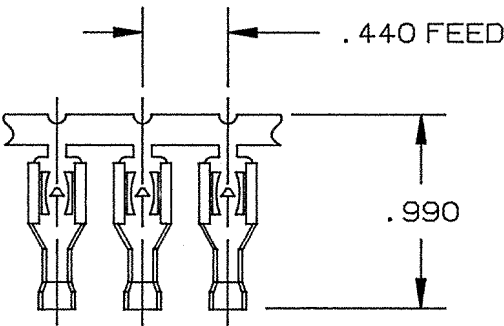

FABRICATED TERMINAL STRIP

SCALE: FULL

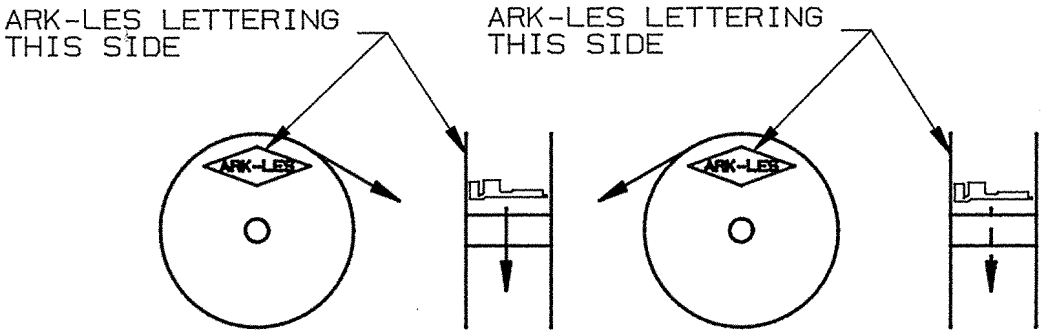

STANDARD REELING (I.E. 3000H19A-5) REVERSE REELING (I.E. 3000H19A-5R)

REELING DIAGRAMS

				PROD. REL.	3/2/65	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.	1/12/65	DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR: R. TASTULA	5/18/95	MATERIAL: SEE TABLE
				CHK'D: R.W.T.	5-27-97	FINISH: SEE TABLE
U	REVISED PER ECR #11289	5/23/97	RT	APP: Cor	6-3-97	PART NO: 3000H19/-5
T	REVISED & REDRAWN PER ECR #10434	5/18/95	RT	SUPERCEDES DWG. DATED:	6/4/92	
REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BT00032	

ORIGINAL