



DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	
DW	

PART NAME: FEMALE TERMINAL

PART NO: 3000H19/-5-2

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H19A-5-2	.020 ±.001 THK. BRASS PRETINNED	SEE MAT'L	YES
3000H19AB-5-2	.020 ±.001 THK. BRASS	NONE	YES


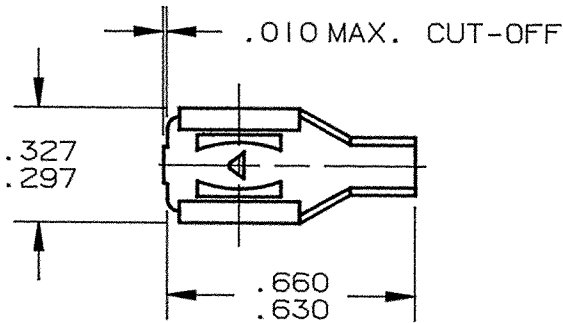


- NOTES:
- 1. TO FIT STANDARD .250 X .032 MALE TAB.
 - 2. TO ACCEPT #14-#20 GAUGE WIRE.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ±1/32
 - 4. FOR PARTS LESS DIMPLE ADD SUFFIX "-3" TO PART NUMBER. (I.E. 3000H19A-5-2-3)
 - 5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
 - 6. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H19A-5-2-1)
 - 7. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M68H-1.
 - 1ST INSERTION: 12.0 LBS MAX.
6.0 LBS MIN.
 - 1ST WITHDRAWAL: 17.0 LBS MAX.
6.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL
 - 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL

(F)

ARK-LES LETTERING
THIS SIDE


ARK-LES LETTERING
THIS SIDE



STANDARD REELING
(I.E. 3000H19A-5-2)

REVERSE REELING
(I.E. 3000H19A-5-2R)

REELING DIAGRAMS

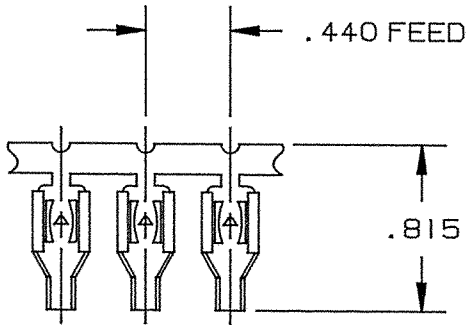

ARK-LES
UNCONTROLLED

FABRICATED TERMINAL STRIP

SCALE: FULL

				PROD. REL.	99868	3/2/65	PC	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR:	R. TASTULA	4/5/95		MATERIAL: SEE TABLE
				CHK'D:	R.W.T.	4-7-95		FINISH: SEE TABLE
				APP:	COR	9-23-95		PART NO: 3000H19/-5-2
F	REVISED & REDRAWN PER ECR #10434	4/5/95	RT	SUPERCEDES DWG. DATED:	6/5/92			
REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BT00033			

ORIGINAL IF RED