




DEPT
1
2
3
4
5
6
7
8
9
10
11
12
NC
JZ

PART NAME: FEMALE TERMINAL

PART NO: 3000H19/-6


PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H19A-6	.020 ±.001 THK. BRASS PRETINNED	SEE MAT'L	YES
3000H19AB-6	.020 ±.001 THK. BRASS	NONE	YES

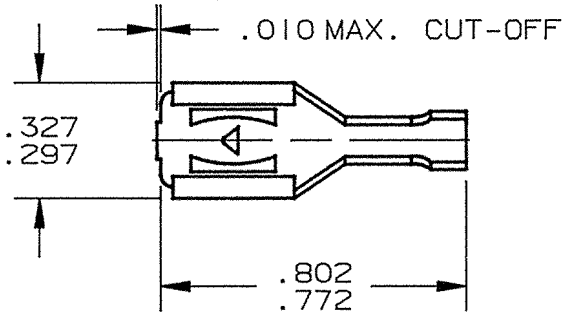

- NOTES:
- 1. TO FIT STANDARD .250 X .032 MALE TAB.
 - 2. TO ACCEPT #18-#22 GAUGE WIRE.
INSULATION RANGE: .040-.090 DIA.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ±1/32
 - 4. FOR PARTS LESS DIMPLE ADD SUFFIX "-3" TO PART NUMBER. (I.E. 3000H19A-6-3)
 - 5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
 - 6. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H19A-6-1)
 - 7. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M68H-1.
 - 1ST INSERTION: 12.0 LBS MAX.
6.0 LBS MIN.
 - 1ST WITHDRAWAL: 17.0 LBS MAX.
6.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL
 - 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE
4.0 LBS MIN. INDIVIDUAL

ARK-LES LETTERING
THIS SIDE

ARK-LES LETTERING
THIS SIDE

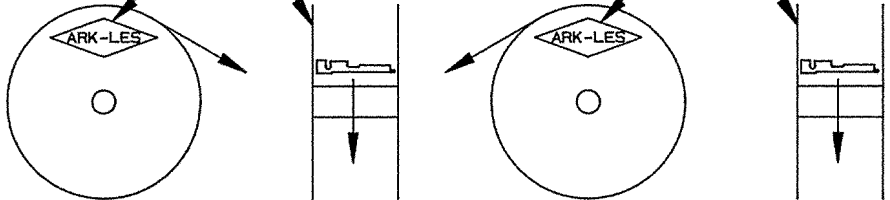


STANDARD REELING
(I.E. 3000H19A-6)

REVERSE REELING
(I.E. 3000H19A-6R)

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

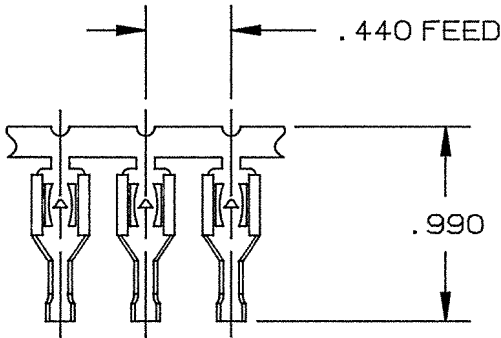

FABRICATED TERMINAL STRIP

SCALE: FULL

				PROD. REL.	PER DW	6/21/71	JB	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.	PER DG	6/8/71	JB	DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR:	R. TASTULA	4/5/95		MATERIAL: SEE TABLE
				CHK'D:	R.W.T.	5-27-97		FINISH: SEE TABLE
M	REVISED PER ECR •11289	5/23/97	RT	APP:	COR	6-3-97		PART NO: 3000H19/-6
L	REVISED & REDRAWN PER ECR •10434	4/5/95	RT	SUPERCEDES DWG. DATED:	6/5/92			
REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO:	BT00034		

ORIGINAL