



DEPT	
1	I
2	
3	
4	I
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME:

TERMINAL, FEMALE



PART NO:

3000H20/

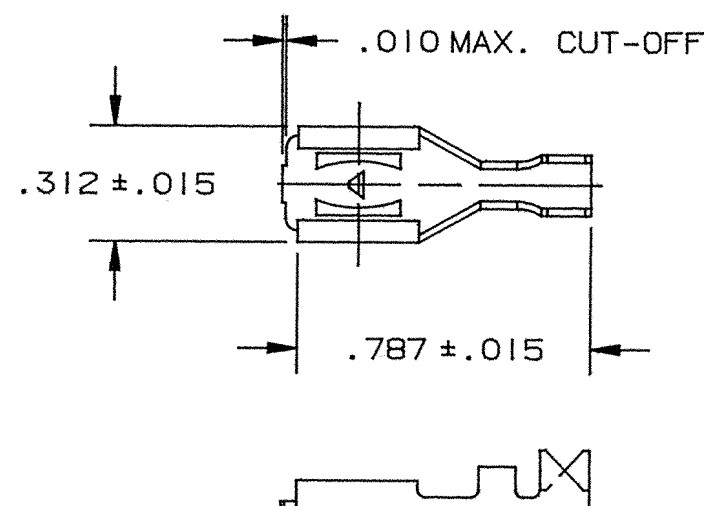

NOTES:

1. TO FIT STANDARD .250 X .032 MALE TAB.
2. TO ACCEPT #18-#24 GAUGE WIRE.
INSULATION RANGE: .040-.090 DIA.
3. RECOMMENDED STRIP LENGTH: 1/8 ± 1/32
4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
5. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H20A-1)

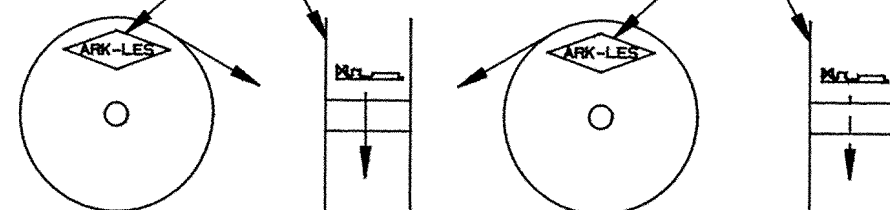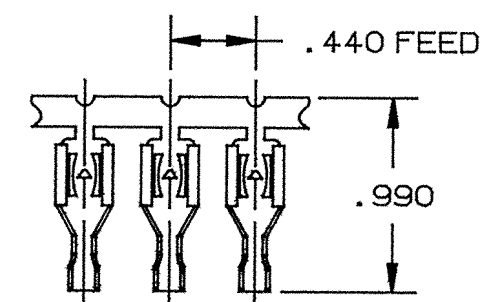ARK-LES LETTERING
THIS SIDEARK-LES LETTERING
THIS SIDESTANDARD REELING
(I.E. 3000H20A)REVERSE REELING
(I.E. 3000H20AR)REELING DIAGRAMS**ARK-LES**
UNCONTROLLEDFABRICATED TERMINAL STRIP

SCALE: FULL

				PROD. REL.	40735	3-22-60	BA	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.	40735	3-22-60	BA	DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	M. BUMILA	10-28-92		MATERIAL:		
				CHK'D:	R.W.T.	10-30-92		SEE TABLE		
				APP:	B.K.H.	11-3-92		FINISH:		
G	REVISED & REDRAWN PER ECR #9320	10-28-92	M.B.	SUPERCEDES DWG. DATED:	4-5-77			PART NO:		
REV.	DESCRIPTION	DATE	DR.	SCALE: 2X	CAD NO: BT00042			3000H20/		

ORIGINAL IF RED