

DEPT	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
ME	
PROD	

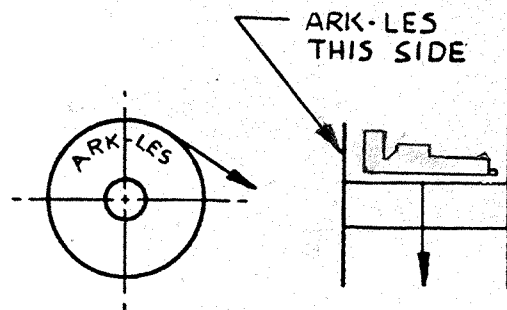

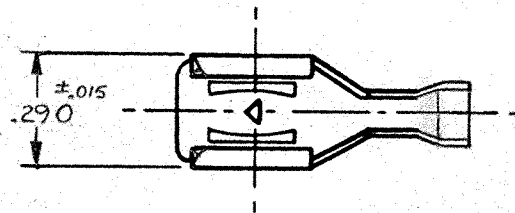

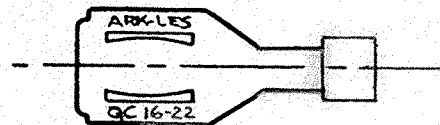
PART NAME:

TERMINAL, FEMALE

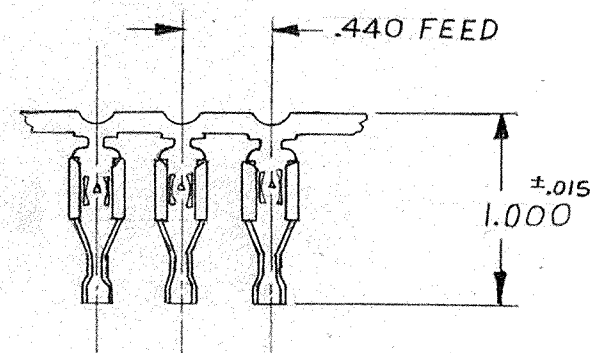
PART NO.

3000H219/-4

PART NO	MATERIAL	FINISH
3000H219A-4	.016 THK BRASS	PRE-TIN
3000H219AB-4	.016 THK BRASS	NONE

WINDING DIAGRAMARK-LES
UNCONTROLLEDNOTES:

1. TO FIT STANDARD .250X.032 MALE TAB.
2. WIRE RANGE #16-22
3. RECOMMENDED STRIP LENGTH $9/32 \pm 1/32$.
4. FOR LOOSE PIECE PARTS, ADD -1 TO PART NO.
5. INSULATION RANGE .075 -.125

FABRICATED TERMINAL STRIPSCALE: FULL

				PROD. REL.	PER J.B.	1-14-77	JJB	TOLERANCES UNLESS OTHERWISE SPECIFIED :		
				QUOTE REL				DECIMALS $\pm .010$	METRIC $\pm 0.25 \text{ mm}$	ANGLES $\pm 1^\circ$
				DR. : J. FLYNN				11-30-88		
				CHK'D. . R.W.T.				12-2-88		
				APP. : <i>C.O. BULLY</i>				12-2-88		
D	REDRAWN WITHOUT CHANGE		11-30-88	JF	SUPERSEDES DWG. DATED : 4-25-83				FINISH: SEE TABLE	
REV.	DESCRIPTION		DATE	DR.	SCALE: 2X	F.M.F.		PART NO 3000H219/-4		

ORIGINAL FILED