




DEPT	
1	
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: FEMALE TERMINAL

PART NO: 3000H219/-6

PART NO.	MATERIAL	FINISH
3000H219A-6	.016 THICK BRASS	PRETINNED
3000H219AB-6		NONE

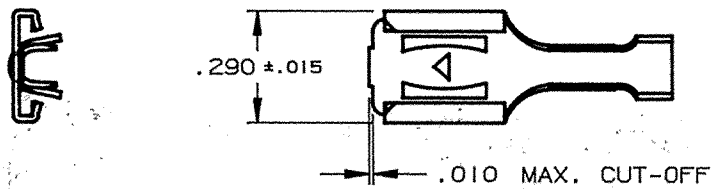

(H)

- NOTES:
1. TO ACCEPT A .250 X .032 MALE TAB.
  2. TO ACCOMMODATE #18 - #22 GAUGE WIRE.
  3. RECOMMENDED STRIP LENGTH: 9/32 ± 1/32.
  4. INSULATION RANGE: .040 - .090.
  5. INSERTION/WITHDRAWAL FORCES TO COMPLY WITH UL 310.
  6. FOR LOOSE PIECE PARTS ADD SUFFIX "-1" TO PART NUMBER. (I.E. 3000H219A-6-1).
  7. FOR STANDARD REELING SEE FIGURE 1.
  8. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 3000H219A-6R) SEE FIGURE 2.




FIGURE 1  
STANDARD REELING  
(I.E. 3000H219A-6)





FIGURE 2  
REVERSE REELING  
(I.E. 3000H219A-6R)

# ARK-LES UNCONTROLLED

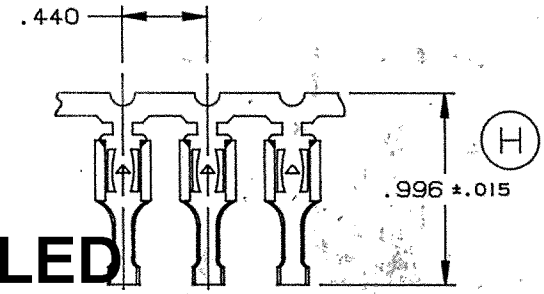

FABRICATED TERMINAL STRIP

SCALE: 1=1

				PROD. REL.	ECR 1392	10/7/77	RM	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ± .010	METRIC ± 0.25mm	ANGLES ± 1°
				DR:	B J CARUTHERS	7/1/96		MATERIAL: SEE TABLE		
				CHK'D:	R.W.T.	7-9-96		FINISH: SEE TABLE		
				APP:	COR	7-10-96		PART NO: 3000H219/-6		
H	REVISED & REDRAWN PER ECR #10967	7/1/96	BJC	SUPERCEDES DWG. DATED: 11/30/88						
REV.	DESCRIPTION	DATE	DR.	SCALE: 2=1	CAD NO: AT00049					

ORIGINAL IF RED