



DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: FEMALE TERMINAL


PART NO:
3000H 222J-4

PART NO.	MATERIAL	FINISH
3000H 222J-4	.016 ±.001 C. R. STEEL	PRE-NICKEL PLATE (LOW STRESS)

.135 MAX.

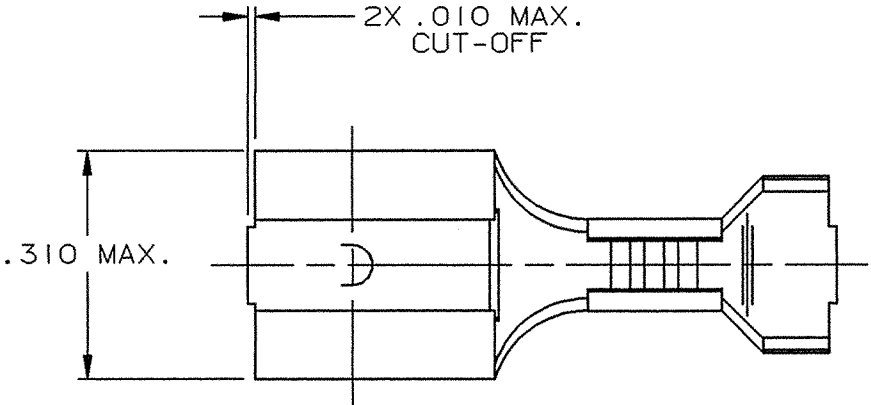


(E)

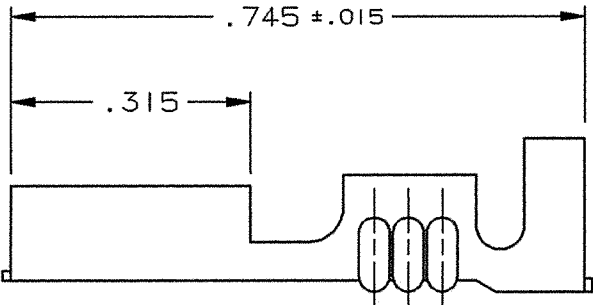



- NOTES:
1. TO ACCEPT A .250 X .032 MALE TAB.
 2. TO ACCEPT #16 - #20 AWG.
 3. RECOMMENDED STRIP LENGTH: 9/32 ±1/32.
 4. INSULATION RANGE: .075 - .125 DIA.
 5. FOR PARTS LOOSE PIECE ADD SUFFIX "-1"
TO PART NUMBER. (i.e. 3000H 222J-4-1).



WIRE GRIP




INSULATION GRIP

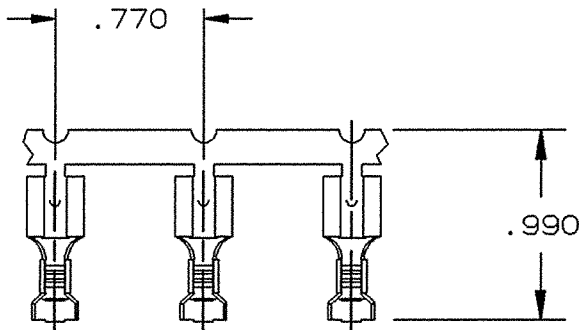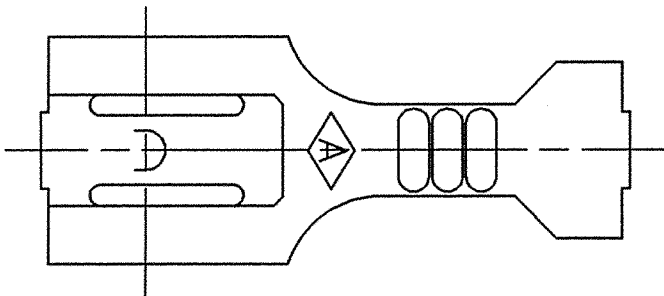

FABRICATED TERMINAL STRIP

SCALE: FULL

ARK-LES LETTERING
THIS SIDE

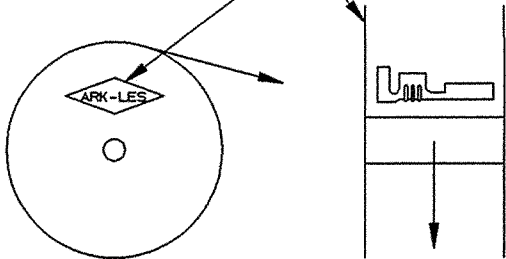

STANDARD REELING

ARK-LES
UNCONTROLLED

REV.	DESCRIPTION	DATE	DR.	SCALE: 4:1	CAD NO: BT00118	PART NO: 3000H 222J-4
E	REVISED & REDRAWN PER ECR #12304	6/14/02	RT	SUPERCEDES DWG. DATED: 12/31/85		
				PROD. REL. DH 1995 1/3/86 RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
				QUOTE REL.	DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°	
				DR: R. TASTULA 6/14/02	MATERIAL: SEE TABLE	
				CHK'D: R.W.T. 6-25-02	FINISH: SEE TABLE	
				APP: Jim Shupe 7/22/02		

ORIGINAL IF RED