
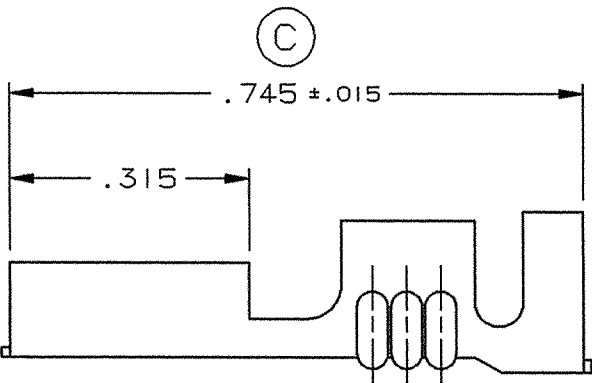
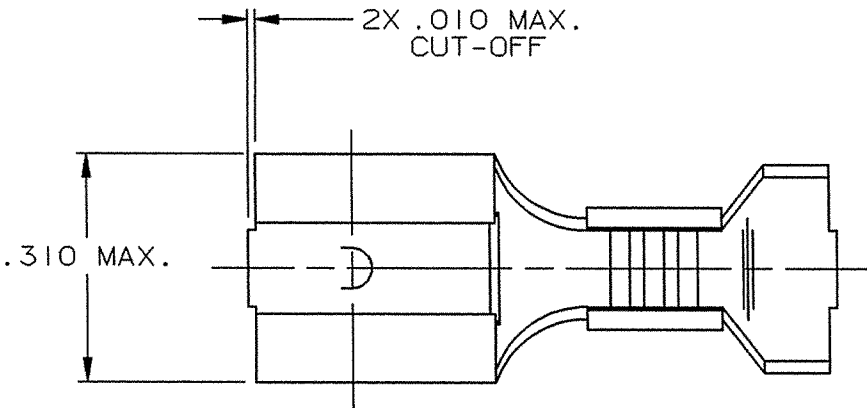


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	


PART NAME: FEMALE TERMINAL

PART NO:
3000H 222J-5


PART NO.	MATERIAL	FINISH
3000H 222J-5	.016 ±.001 C. R. STEEL	PRE-NICKEL PLATE (LOW STRESS)

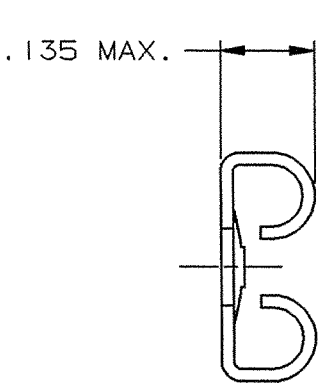



- NOTES:
1. TO ACCEPT A .250 X .032 MALE TAB.
 2. TO ACCEPT #14 - #18 AWG.
 3. RECOMMENDED STRIP LENGTH: 9/32 ±1/32.
 4. INSULATION RANGE: .100 - .175 DIA.




WIRE GRIP



INSULATION GRIP

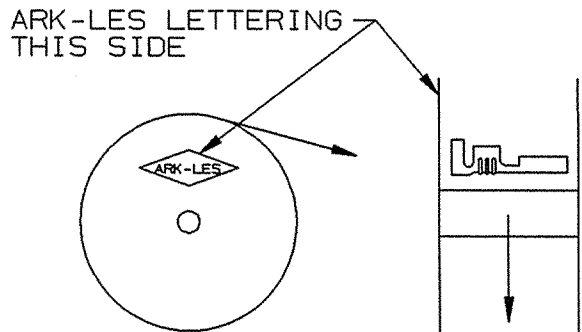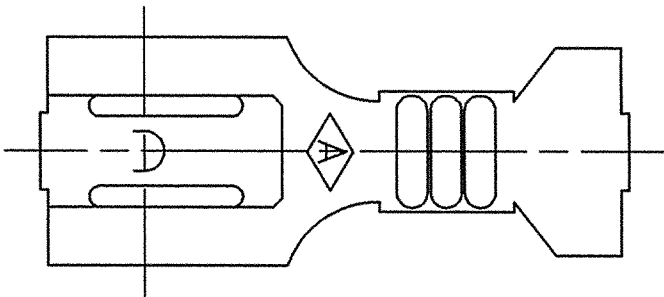

STANDARD REELING

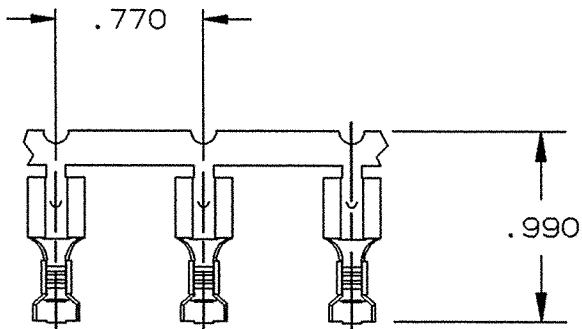

FABRICATED TERMINAL STRIP

SCALE: FULL

ARK-LES
UNCONTROLLED

				PROD. REL.	DH 2002	2/18/86	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR:	R. TASTULA	6/14/02		MATERIAL: SEE TABLE
				CHK'D:	R.W.T.	6-25-02		FINISH: SEE TABLE
				APP:	Jim Shaffer	7-22-02		PART NO: 3000H 222J-5
C	REVISED & REDRAWN PER ECR #12304	6/14/02	RT	SUPERCEDES DWG. DATED:	2/10/86			
REV.	DESCRIPTION	DATE	DR.	SCALE: 4:1	CAD NO: BT00120			

ORIGINAL IF RED