




DEPT	PART NAME	PART NO.	MATERIAL	FINISH	D.C. STAMP	PART NO.
1	TERMINAL- FEMALE	3500H 63E	.014 BRASS	P2E-TINNED	YES	3500H 63/ CUSTOMER DRAWING
2		3500H 63EB	.014 BRASS	NONE	YES	
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
ME						

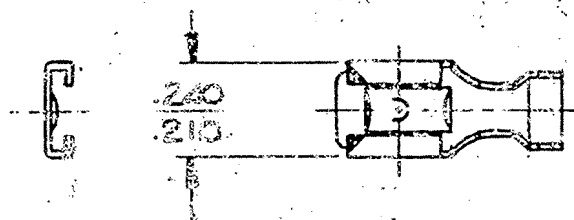




NOTES:

1. TO ACCEPT STANDARD 187x.020 MALE TAB.
2. WIRE RANGE #16-22.
3. INSULATION RANGE .075-.125.
4. FOR LOOSE PIECE ADD -1 SUFFIX TO PART NO.

5. RECOMMENDED STRIP LENGTH: $5/32 \pm 1/32$.


ARK-LES

UNCONTROLLED



REELING DIAGRAM

SCALE 1:1

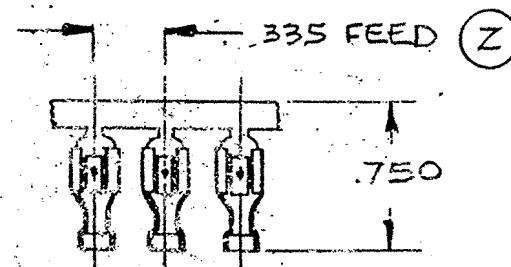

FABRICATED TERMINAL STRIP

(FULL SCALE)

ORIGINAL IF RED

			PROD. REL.	ARF	1021-68	LC	TOLERANCES UNLESS OTHERWISE SPECIFIED :
			QUOTE REL.				DECIMALS $\pm .010$ METRIC ± 0.25 mm ANGLES $\pm 1^\circ$
			DR. :	R. TASTULA	12-6-95		MATERIAL: SEE TABLE
			CHK'D. :	R.W.T.	12-6-95		FINISH: SEE TABLE
			APP. COR	12-14-95			PART NO. 3500H 63/
Z	REVISED PER ECR #10751.		SUPERSEDES DWG. DATED 9-1-81.				
REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	F.M.F.		