
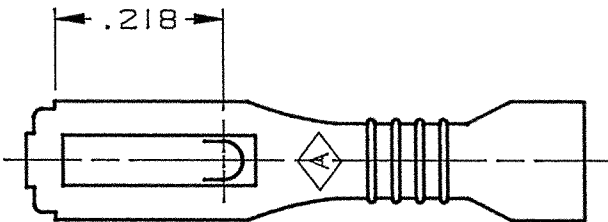
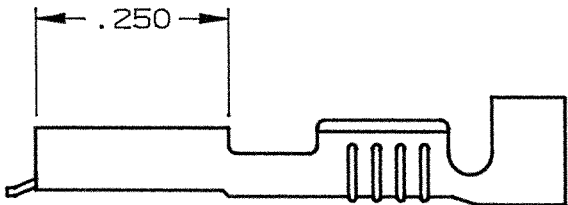


DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	


PART NAME: FEMALE TERMINAL

PART NO: 3650H101A/

PART NO.	MATERIAL	FINISH
3650H101A	.010 BRASS	PRETINNED
3650H101AB	.010 BRASS	NONE

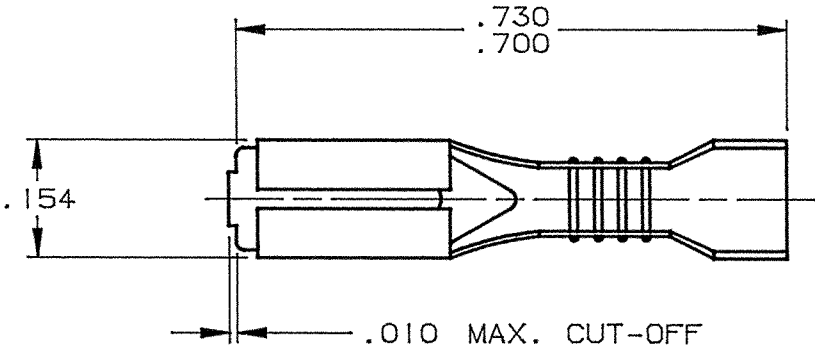


- NOTES:
- 1. MUST ACCEPT MALE TAB .110/.125 X .014.
 - 2. WIRE RANGE: #18-#24 AWG.
 - 3. INSULATION RANGE: .040 -.090 DIA.
 - 4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (I.E. 3650H101AR).
 - 5. FOR LOOSE PIECE PARTS ADD "-1" TO PART NUMBER (I.E. 3650H101A-1).
 - 6. RECOMMENDED STRIP LENGTH: 7/32 ±1/32.

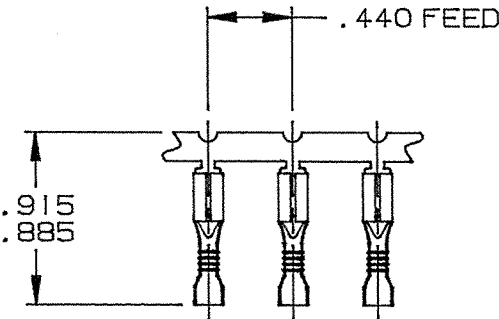

FABRICATED TERMINAL STRIP


SCALE 1=1

ARK-LES LETTERING
THIS SIDE

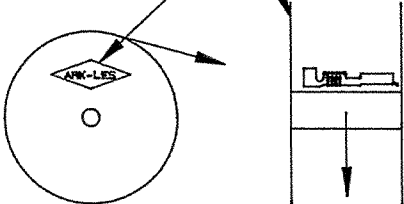

STANDARD REELING
(I.E. 3650H101A)

ARK-LES LETTERING
THIS SIDE

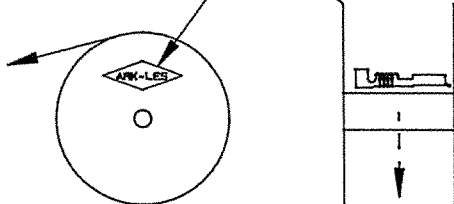

REVERSE REELING
(I.E. 3650H101AR)

ARK-LES
UNCONTROLLED

				PROD. REL.	PER DG	10/3/74	RW	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	R. TASTULA	9/1/98		MATERIAL: SEE TABLE		
				CHK'D:	R.W.J.	9-8-98		FINISH: SEE TABLE		
				APP:	3510	9-8-98		PART NO: 3650H101A/		
P	REVISED & REDRAWN PER ECR #11590	9/1/98	RT	SUPERCEDES DWG. DATED:	3/3/87					
REV.	DESCRIPTION	DATE	DR.	SCALE: 4=1	CAD NO: BUM0019					