


DEPT
1
2
3
4
5
6
7
8
9
10
11
12
ME

PART NAME:

TERMINAL - FEMALE

PART NO. 3650H121A/-2





PART NO.	MATERIAL	FINISH
3650H121A-2	.010 THICK BRASS	PRETINNED
3650H121AB-2		NONE

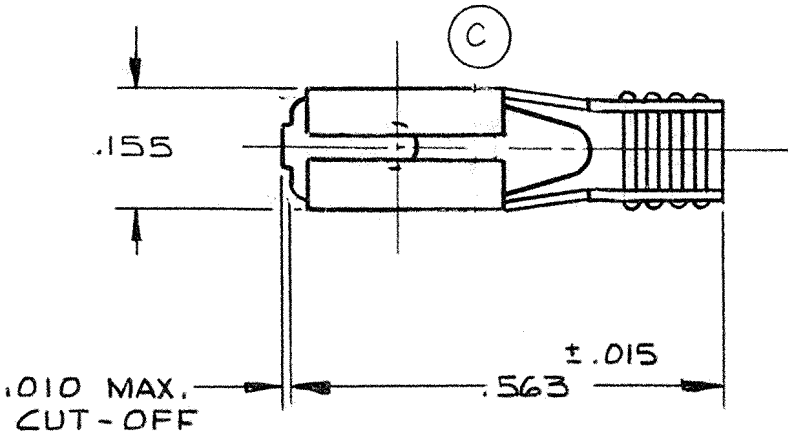

NOTES:

- 1. TO MATE WITH .125/110 x .018/.016 THICK MALE TAB
- 2. TO ACCOMMODATE (1) #18AWG TO (2) #18AWG.
- 3. RECOMMENDED STRIP LENGTH : 7/32 ± 1/32.
- 4. FOR TERMINALS LOOSE PIECE ADDED SUFFIX -1 TO PART NO. (I.E. 3650H121AB-2-1).
- 5. FOR STANDARD REELING SEE FIGURE 1.
- 6. FOR REVERSE REELING ADD SUFFIX R TO PART NO. (I.E. 3650H121AB-2R) SEE FIGURE 2.
- 7. INSERTION & WITHDRAWAL REQUIREMENTS:
1ST. IN. = 9 LBS. MAX.
1ST. OUT = 4 LBS. MIN.
USE CS 3650M19-18 (.018 THICK STEEL) FOR TESTING.

ARK-LES
UNCONTROLLED

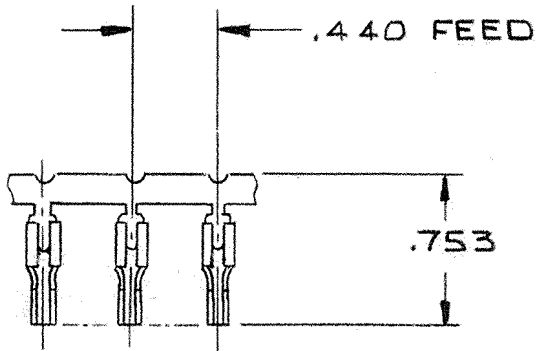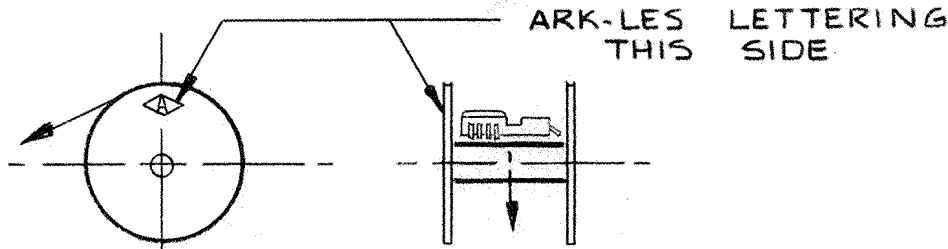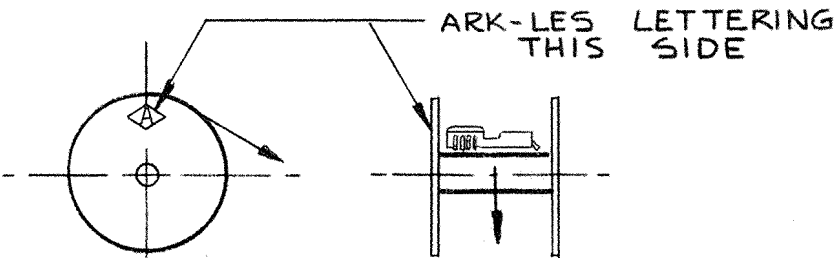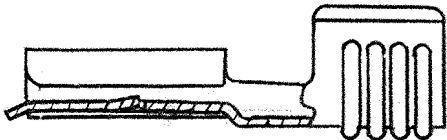

SCALE : 1X

REV.	DESCRIPTION	DATE	DR.	PROD. REL.	DH 2358	12-28-87	R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED :
				QUOTE REL.				DECIMALS ± .010 METRIC ± 0.25mm ANGLES ± 1°
D	CS3650M19-18 WAS CS3650M19, ECR 6863	5-27-88	R.T.	DR. : P. PERROTTA	12-17-87			MATERIAL: SEE TABLE
C	NOTE #1: .018/.016 WAS .014/.016	3-25-88	PJP	CHK'D.: R.W.T.	12-23-87			FINISH: SEE TABLE
	REMOVED 1 DIMPLE, ADDED NOTE #7 ...	ECR	6745	APP.: TFP	12-28-87			PART NO.: 3650H121A/-2
B	PROD. REL. P/N WAS 3650H121A/-2, ECR 6604	12-22-87	PP	SUPERSEDES DWG DATED:				
				SCALE: 4X	F.M.F.			