
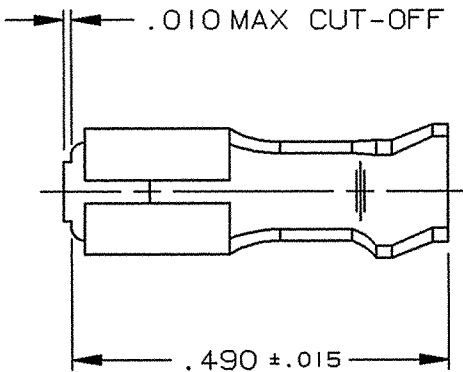


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	






PART NAME: FEMALE TERMINAL

PART NO: 3650H 1/

PART NUMBER	MATERIAL	FINISH
3650H 1A	.016 ±.001 THICK BRASS	PRETINNED
3650H 1AB		NONE



- NOTES:
1. TO ACCEPT A .110/.125 X .014 MALE TAB.
 2. TO ACCOMMODATE #16 - #22 GAUGE WIRE.
 3. INSULATION RANGE: .040 - .090.
 4. RECOMMENDED STRIP LENGTH: 1/8 ±1/32.
 5. FOR LOOSE PIECE PARTS ADD SUFFIX "-1" TO PART NUMBER (i.e. 3650H 1A-1).
 6. FOR STANDARD REELING SEE FIGURE 1.
 7. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (i.e. 3650H 1AR).
 8. INSERTION WITHDRAWAL FORCES TO COMPLY WITH UL 310 WHEN USING TEST TAB CS3650MI9-20.

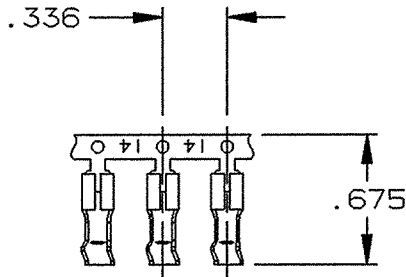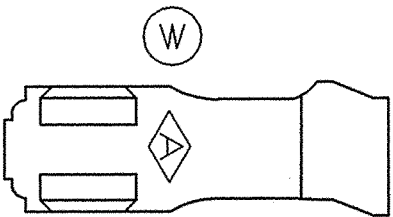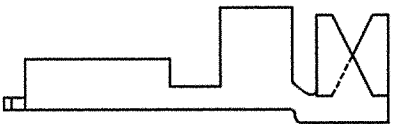

ARK-LES
UNCONTROLLED FABRICATED TERMINAL STRIP
SCALE 1=1




FIGURE 1
STANDARD REELING
(I.E. 3650H 1A)




FIGURE 2
REVERSE REELING
(I.E. 3650H 1AR)

				PROD. REL.	63389	6/27/62	BA	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.	63389	6/27/62	BA	DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR: B J CARUTHERS 10/3/96				MATERIAL: SEE TABLE		
				CHK'D: R.W.T. 11-21-02						
W	REVISED PER ECR #12437	11/18/02	RT	APP: JJS 12-13-02				FINISH: SEE TABLE		
U	REVISED & REDRAWN PER ECR #11053	10/3/96	BJC	SUPERCEDES DWG. DATED: 8/12/81				PART NO: 3650H 1/		
REV.	DESCRIPTION	DATE	DR.	SCALE: 4 = 1		CAD NO: BUM0009				

ORIGINAL IF RED