

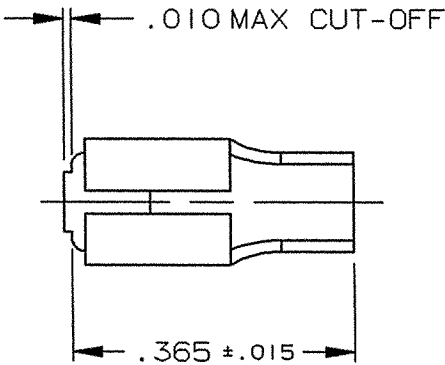


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: FEMALE TERMINAL

PART NO: 3650H 2/-2

PART NUMBER	MATERIAL	FINISH
3650H 2A-2	.016 ±.001 THICK BRASS	PRETINNED
3650H 2AB-2		NONE



- NOTES:
- 1. TO ACCEPT A .110/.125 X .020 MALE TAB.
 - 2. TO ACCOMMODATE #16 - #22 GAUGE WIRE.
 - 3. RECOMMENDED STRIP LENGTH: 1/8 ±1/32.
 - 4. FOR LOOSE PIECE PARTS ADD SUFFIX "-1" TO PART NUMBER (i.e. 3650H 2A-2-1).
 - 5. FOR STANDARD REELING SEE FIGURE 1.
 - 6. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (i.e. 3650H 2A-2R) SEE FIGURE 2.
 - 7. INSERTION WITHDRAWAL FORCES TO COMPLY WITH UL 310 WHEN USING TEST TAB CS3650M19-20.

W

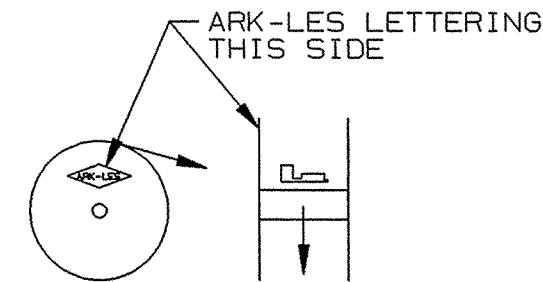


FIGURE 1
STANDARD REELING
(I.E. 3650H 2A-2)


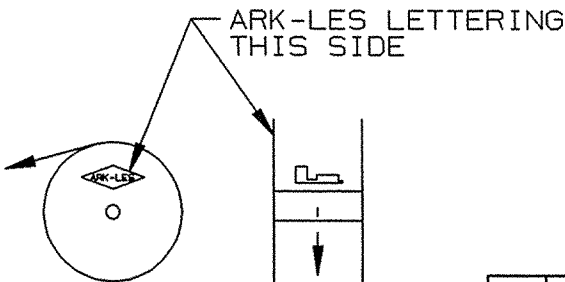


FIGURE 2
REVERSE REELING
(I.E. 3650H 2A-2R)

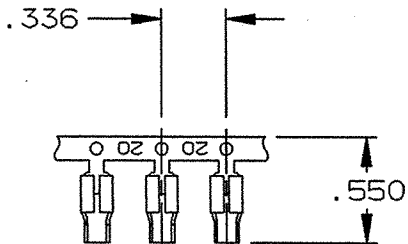

FABRICATED TERMINAL STRIP

SCALE 1=1

ARK-LES
UNCONTROLLED

				PROD. REL.	63389	6/27/62	BA	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.	63389	6/27/62	BA	DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR: B J CARUTHERS 6/28/95				MATERIAL: SEE TABLE		
				CHK'D: R.W.T. 11-21-02						
Y	REVISED PER ECR #12437	11/19/02	RT	APP: J.R. 12-13-02				FINISH: SEE TABLE		
W	REVISED & REDRAWN PER ECR #10514	6/28/95	BJC	SUPERCEDES DWG. DATED: 8/12/81						
REV.	DESCRIPTION	DATE	DR.	SCALE: 4=1	CAD NO: BUM0012			PART NO: 3650H 2/-2		

ORIGINAL IF RED