


DEPT
1
2
3
4
5
6
7
8
9
10
11
12
ME

PART NAME:

TERMINAL - FEMALE

PART NO. 3650H118A/-2



PART NO.	MATERIAL	FINISH
3650H118A-2	.010 THICK BRASS	PRETINNED
3650H118AB-2		NONE

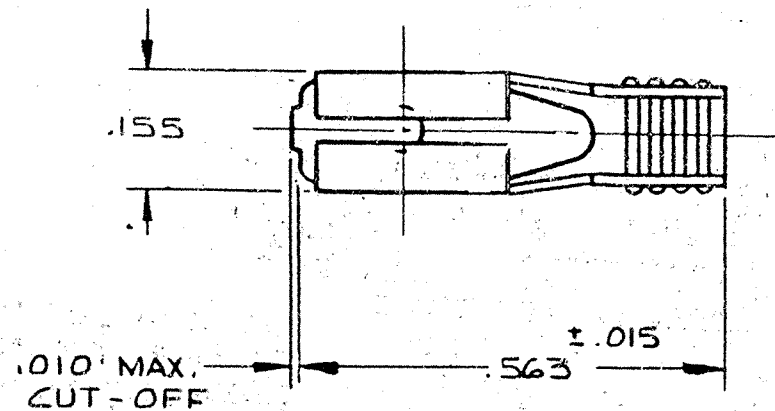

NOTES:

1. TO MATE WITH .125/.110 x .018/.016 THICK MALE TAB.
2. TO ACCOMMODATE #12-#24 AWG WIRE.
3. RECOMMENDED STRIP LENGTH: $7/32 \pm 1/32$.
4. FOR TERMINALS LOOSE PIECE, ADDED SUFFIX -1 TO PART NO. (I.E. 3650H118A-2-1)
5. FOR STANDARD REELING SEE FIGURE 1.
6. FOR REVERSE REELING ADD SUFFIX R TO PART NO. (I.E. 3650H118A-2R) SEE FIGURE 2.
7. INSERTION 4 WITHDRAWAL REQUIREMENTS =
 1ST IN = 9 LBS. MAX.
 1ST OUT = 4 LBS. MIN.
 USE CS3650M19-18 (.018 THICK STEEL) FOR TESTING.

ARK-LES
UNCONTROLLED

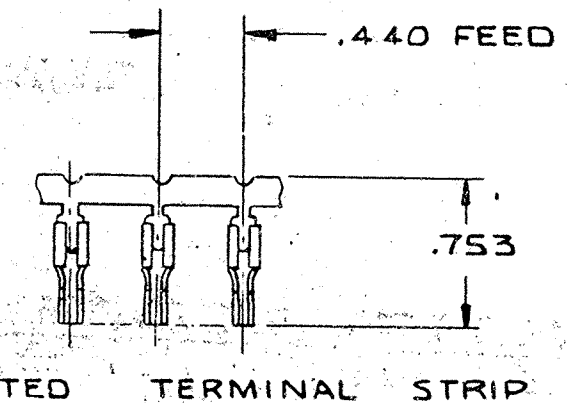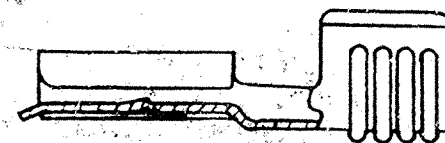

SCALE: 1X

ORIGINAL IF RED

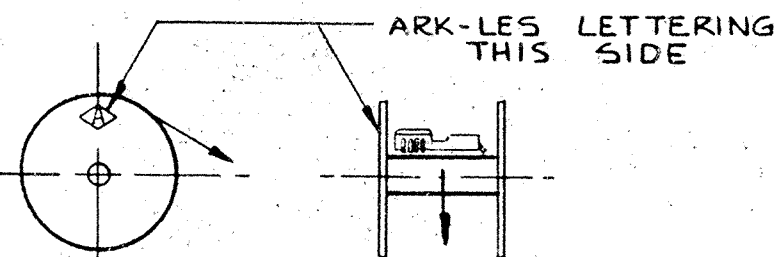


FIGURE 1

STANDARD REELING

(I.E. 3650H118A-2)

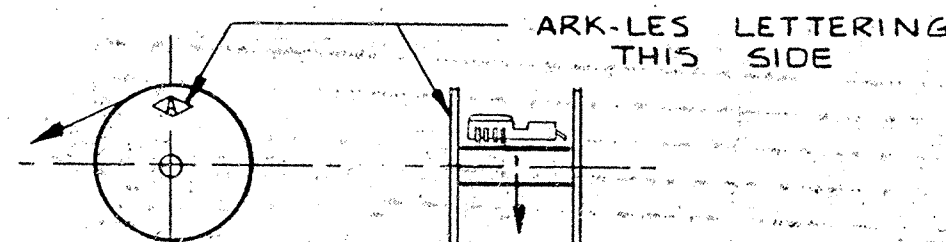


FIGURE 2

REVERSE REELING

(I.E. 3650H118A-2R)

REV	DESCRIPTION	DATE	DR.	SCALE	4X	F.M.F.	TOLERANCES UNLESS OTHERWISE SPECIFIED:
							DECIMALS $\pm .010$ METRIC $\pm 0.25mm$ ANGLES $\pm 1^\circ$
							MATERIAL: SEE TABLE
							FINISH: SEE TABLE
							PART NO.: 3650H118A/-2