



DEPT	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	
DW	

PART NAME: TERMINAL, FEMALE

PART NO: 3650H128/




PART NUMBER	MATERIAL	FINISH
3650H128A	.010 ±.0005 THK. BRASS FULL HARD TEMPER	PRETINNED
3650H128AB	.010 ±.0005 THK. BRASS FULL HARD TEMPER	NONE

- NOTES:
- 1. MUST ACCEPT MALE TAB .110 ±.003 X .032 ±.001.
 - 2. WIRE RANGE: #18-#20 AWG.
 - 3. INSULATION RANGE: .075-.125 DIA.
 - 4. RECOMMENDED STRIP LENGTH: 5/32 ±1/32.
 - 5. THIS PART IS NOT UL OR CSA APPROVED.

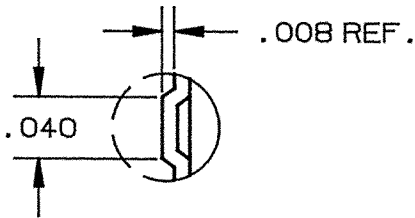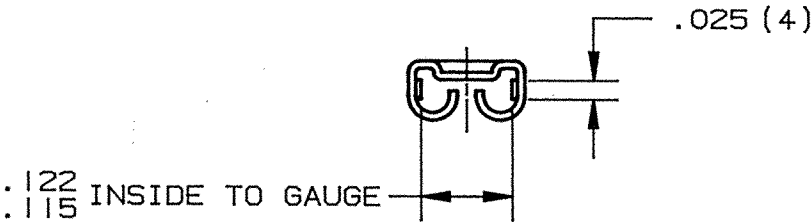


DETAIL "A"

TYPICAL 4 PLACES

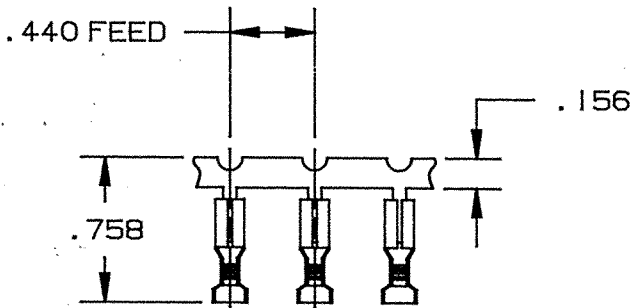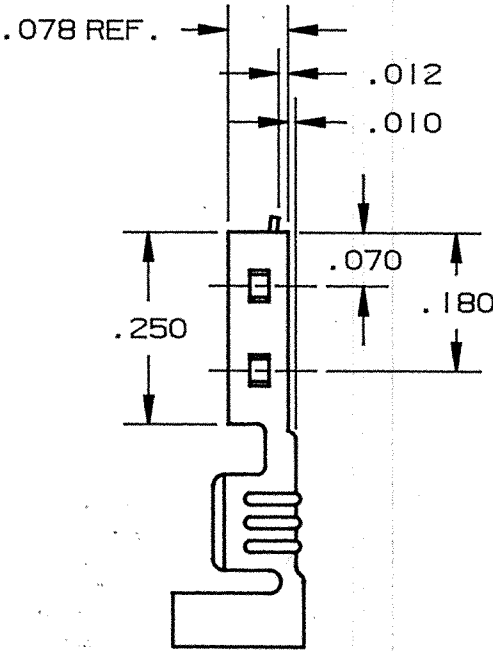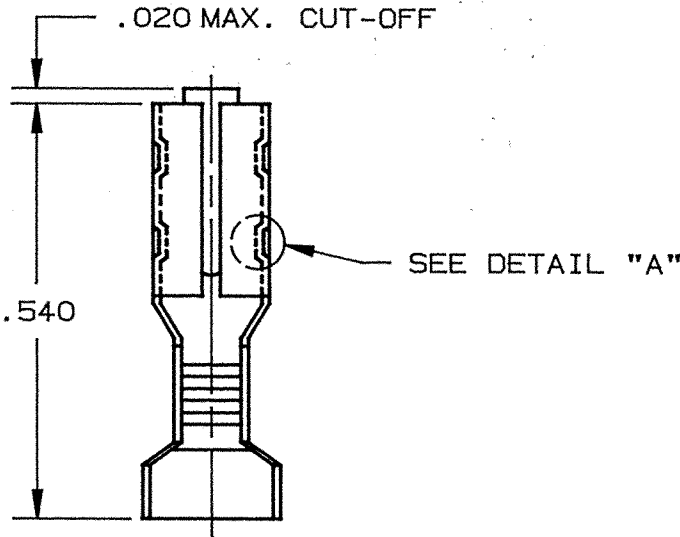


FABRICATED TERMINAL STRIP

SCALE 1:1

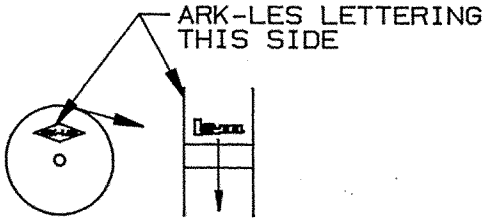

STANDARD REELING
(I.E. 3650H128A)

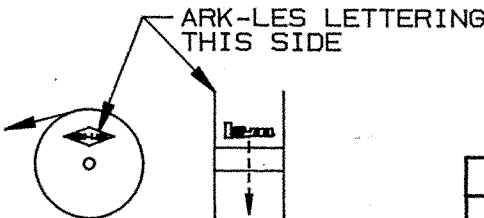

REVERSE REELING
(I.E. 3650H128AR)

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

				PROD. REL.	JM 7710	6/15/94	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR:	B J CARUTHERS	6/14/94		MATERIAL: SEE TABLE
				CHK'D:	R.W.T.	8-2-94		FINISH: SEE TABLE
B	REVISED PER ECR #10238	8/1/94	RT	APP:	COR	8-5-94		PART NO: 3650H128/
A	PROD. REL. PER ECR #10192	6/14/94	BJC	SUPERCEDES DWG. DATED:				
REV.	DESCRIPTION	DATE	DR.	SCALE: 4:1	CAD NO: BUM0016			

ORIGINAL IF RED