




DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: TERMINAL, FEMALE

PART NO: 3650H200J/


PART NO.	MATERIAL	FINISH
3650H200J	.010 ±.0005 CRS-1010	NONE
3650H200JN	.010 ±.0005 CRS-1010	PRE-NICKEL

NOT UL LISTED
NOT CSA CERTIFIED

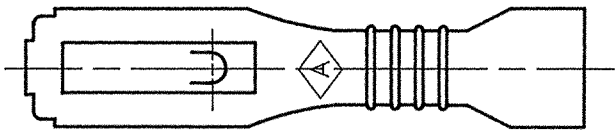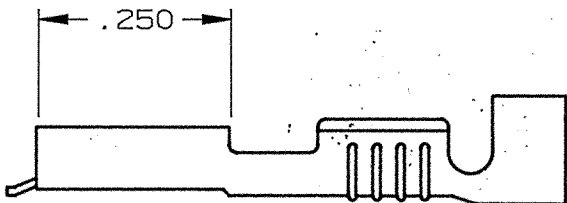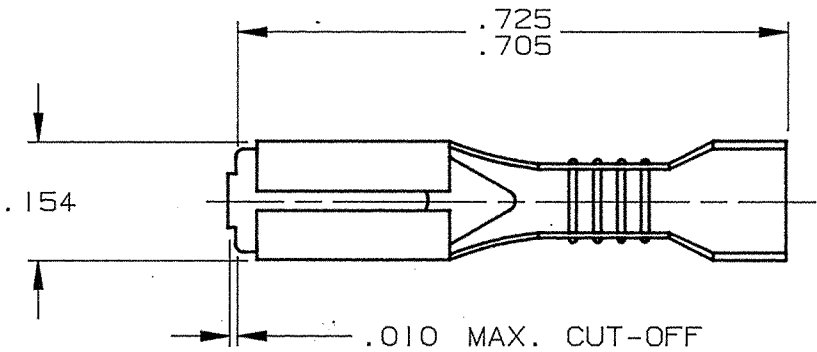

- NOTES:
- 1. MUST ACCEPT MALE TAB .110/.125 X .032.
 - 2. WIRE RANGE: #18-#24 AWG.
 - 3. INSULATION RANGE: .040 -.090 DIA.
 - 4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (i.e. 3650H200JR).
 - 5. FOR LOOSE PIECE PARTS ADD "-1" TO PART NUMBER (i.e. 3650200J-1).
 - 6. RECOMMENDED STRIP LENGTH: 7/32 ±1/32.


ARK-LES
UNCONTROLLED

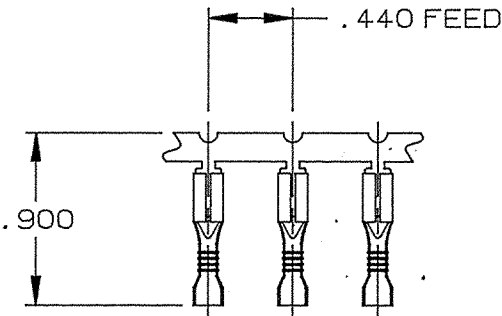

FABRICATED TERMINAL STRIP


SCALE 1=1

ARK-LES LETTERING
THIS SIDE



STANDARD REELING
(I.E. 3650H200J)

ARK-LES LETTERING
THIS SIDE



REVERSE REELING
(I.E. 3650H200JR)

				PROD. REL.	JM 7723	5-1-95	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	B J CARUTHERS	4/19/95		MATERIAL: SEE TABLE		
				CHK'D:	R.W.T.	4-24-96		FINISH: SEE TABLE		
B	REVISED PER ECR #10882	4/17/96	BJC	APP:	COR 5-1-96			PART NO: 3650H200J/		
A	PROD. REL. PER ECR #10493	4/19/95	BJC	SUPERCEDES DWG. DATED:						
REV.	DESCRIPTION	DATE	DR.	SCALE: 4=1	CAD NO: BUM0017					

ORIGINAL