


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME:

MALE TERMINAL

PART NO:

3000MI/-4-2

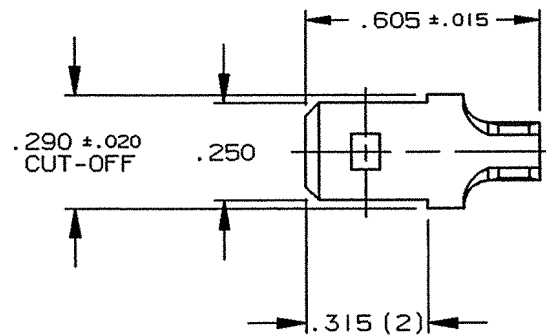

(K)

PART NO.	MATERIAL	FINISH
3000MIA-4-2	.032±.001 THICK BRASS	PRETINNED
3000MIAB-4-2		NONE
3000MIJ-4-2	.032±.001 THICK C.R. STEEL	PRE-NICKEL

NOTES:


1. TO MATE WITH STANDARD .250 X .032 FEMALE QUICK CONNECT.
2. TO ACCOMMODATE #16 - #22 GAUGE WIRE.
3. RECOMMENDED STRIP LENGTH: 3/16 ± 1/32.
4. MALE TAB MUST CONFORM TO UL 310.
5. FOR LOOSE PIECE PARTS ADD SUFFIX "-1" TO PART NUMBER. (i.e. 3000MIA-4-2-1)
6. FOR STANDARD REELING SEE FIGURE 1.
7. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (i.e. 3000MIA-4-2R) SEE FIGURE 2.

ARK-LES

UNCONTROLLED




FIGURE 1

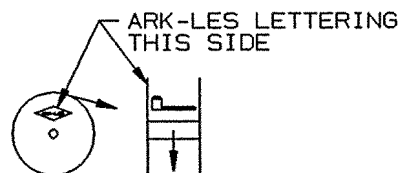


STANDARD REELING
(I.E. 3000MIA-4-2)

FIGURE 2

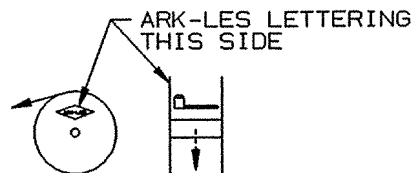

REVERSE REELING
(I.E. 3000MIA-4-2R)

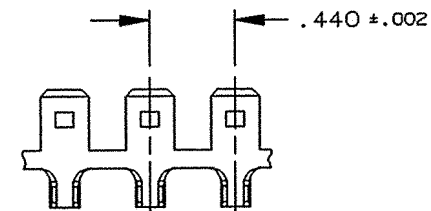

FABRICATED TERMINAL STRIP

SCALE 1=1

				PROD. REL.	HPC0361	5/19/77	SJ	TOLERANCES UNLESS OTHERWISE SPECIFIED:			
				QUOTE REL.	JM 7836	3/17/77	FA	DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°	
				DR: B J CARUTHERS 6/20/95				MATERIAL: SEE TABLE			
				CHK'D: R.W.T. 6-7-00				FINISH: SEE TABLE			
K	3000MIJ-4-2 ADDED PER ECR #12028		5/31/00	RT	APP: J. Bishop 6-20-00						
J	REVISED & REDRAWN PER ECR #10338		6/20/95	BJC	SUPERCEDES DWG. DATED: 9/28/87						
REV.	DESCRIPTION		DATE	DR.	SCALE: 2=1 CAD NO: ATP0028						
								PART NO: 3000MI/-4-2			

ORIGINAL IF RED