




DEPT
1
2
3
4
5
6
7
8
9
10
11
12
NC
JZ

PART NAME: TERMINAL, FEMALE

PART NO: 3500H402/


PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3500H402A	.020 ±.001 THK. BRASS PRETINNED	SEE MAT'L	NO
3500H402AB	.020 ±.001 THK. BRASS	NONE	NO

THIS TERMINAL IS NOT UL LISTED
OR CSA CERTIFIED.




- NOTES:
- 1. TO ACCOMMODATE #16-#20 GAUGE WIRE.
 - 2. INSULATION RANGE: .075-.125.
 - 3. RECOMMENDED STRIP LENGTH: 5/32 ±1/32
 - 4. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS
WHEN USING BRASS TEST TAB 3500M32A:
1ST INSERTION - 10 LBS MAXIMUM
1ST WITHDRAWAL - 3 TO 20 LBS
6TH WITHDRAWAL - 2 LBS MINIMUM

ARK-LES
UNCONTROLLED

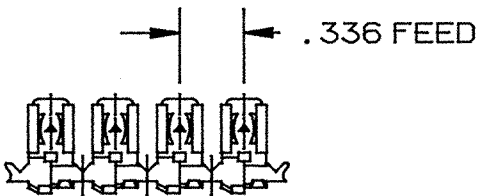

ARK-LES LETTERING
THIS SIDE

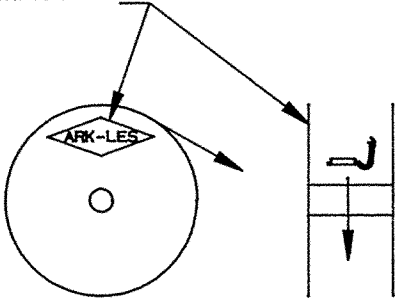

STANDARD REELING

FABRICATED TERMINAL STRIP

SCALE: FULL

				PROD. REL.	JJ6622	6/17/92	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:
				QUOTE REL.				DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
				DR:	M. BUMILA	6-10-92		MATERIAL: SEE TABLE
				CHK'D:	R.W.T.	8-17-94		
B	NOTE #4 REVISED PER ECR #10258	8/3/94	RT	APP:	COL	8-17-94		FINISH: SEE TABLE
A	PROD. REL. PER ECR #9133	6-10-92	M.B.	SUPERCEDES DWG. DATED:				PART NO: 3500H402/
REV.	DESCRIPTION	DATE	DR.	SCALE: 2X	CAD NO: BTU0005			

ORIGINAL IF RED