


DEPT
1
2
3
4
5
6
7
8
9
10
11
12
ME

PART NAME: TERMINAL - FEMALEPART NO
3000H69/

ARK-LES

UNCONTROLLED

PART NO.	MATERIAL	FINISH
3000H69A	.016 THK. BRASS	PRETINNED
3000H69AB	.016 THK. BRASS	NONE
3000H69F	.016 THK. BRASS	SILVER PLT.

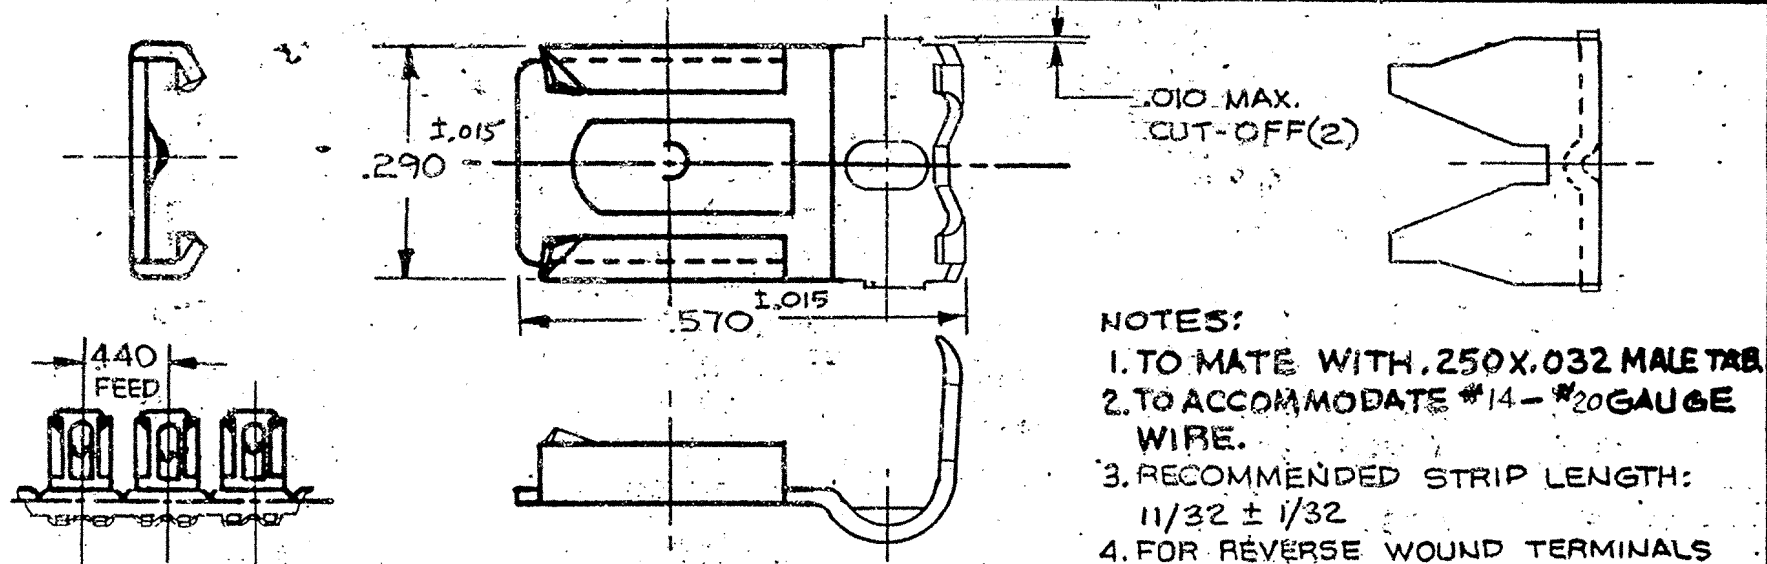


NOTES:


1. TO MATE WITH .250X.032 MALE TAB
2. TO ACCOMMODATE #14 - #20 GAUGE WIRE.
3. RECOMMENDED STRIP LENGTH:
 $11/32 \pm 1/32$
4. FOR REVERSE WOUND TERMINALS
ADD SUFFIX "R" TO PART NO.
5. WIRE LEADS MAY BE ATTACHED IN A
SPECIAL APPLICATOR WHICH FORMS
ONE WIRE GRIP EAR TO PROVIDE
AN INSULATION GRIP. THIS
CAN ONLY BE USED ON WIRE
WITH SMALL INSULATION
DIAMETERS IN THE RANGE
OF .040-.120 O.D. (#18-#20
GAUGE WIRE ONLY) RECOMMEND
ED STRIP LENGTH: $3/16 \pm 1/32$.
6. FOR TERMINALS LOOSE PIECE ADD
SUFFIX -1 TO PART NO.

FABRICATED TERMINAL STRIP

SCALE: 1=1

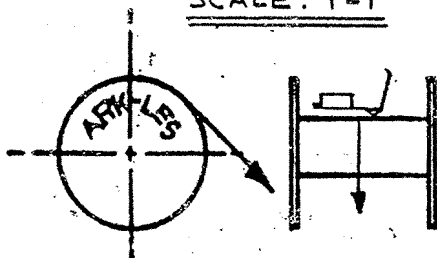

WINDING DIAGRAM

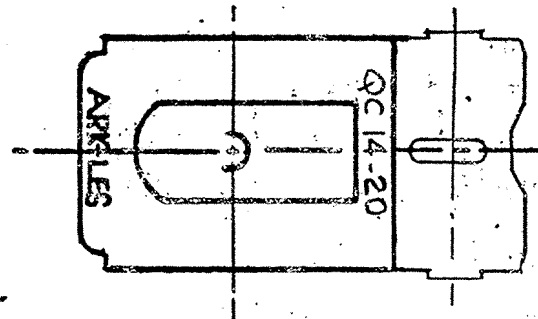

				PROD. REL.	23724	11-23-66	JJP	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.	23724	11-23-66	JJP	DECIMALS $\pm .010$	METRIC $\pm 0.25 \text{ mm}$	ANGLES $\pm 1^\circ$
				DR.	P. PERROTTA	11-11-85		MATERIAL:		
				CHK'D.	R.W.T.	11-20-85		SEE TABLE		
				APP.	B. S. H.	11-20-85		FINISH:		
				SUPERSEDES DWG. DATED	8-29-68			SEE TABLE		
H	REVISED & REDRAWN ECR5442			11-11-85	PJP			PART NO		
REV	DESCRIPTION			DATE	DR	SCALE: 4X	F.M.F.	3000H69/		

ORIGINAL