

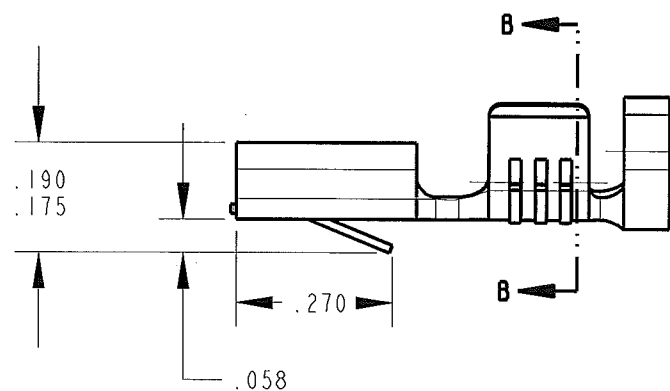
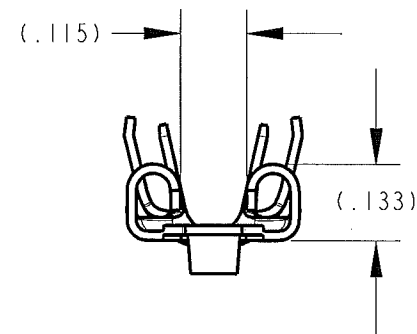
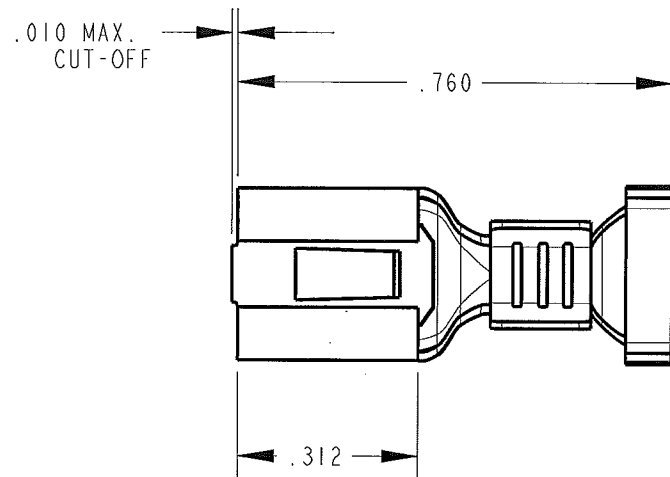
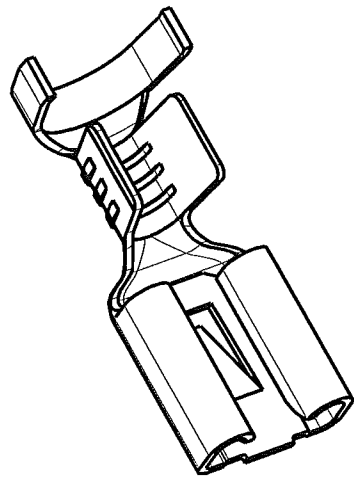



SECTION B-B

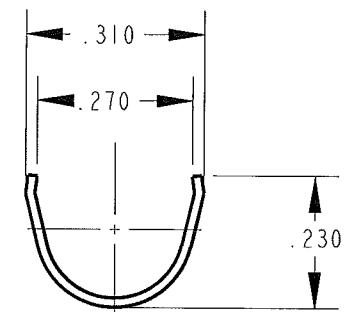

INSULATION GRIP

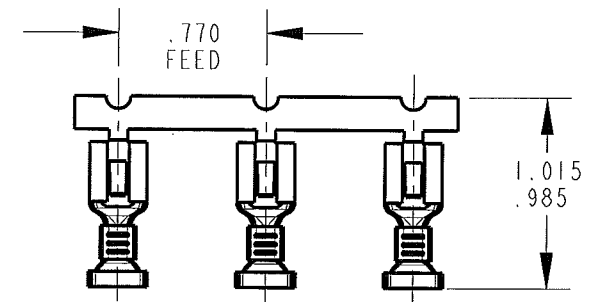

FABRICATED TERMINAL STRIP
SCALE : FULL

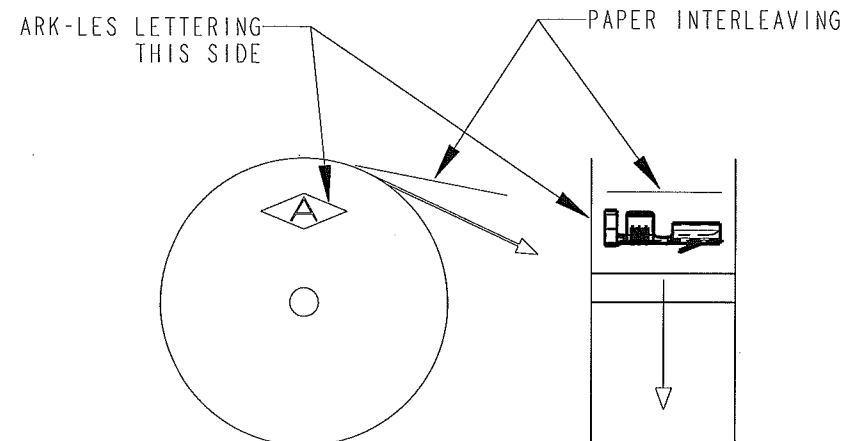

STANDARD REELING DIAGRAM

- NOTES:
1. TO MATE WITH .250 X .032 MALE TAB.
 2. TO ACCOMMODATE AWG #16-#12 WIRE.
 3. INSULATION RANGE: .100-.175 DIA.
 4. RECOMMENDED WIRE STRIP LENGTH: $9/32 \pm 1/32$.
 5. INITIAL INSERTION 8 LBS. MAX., 4 LBS. MIN. USING STANDARD .250 X .032 BRASS TAB.

CUSTOMER DRAWING

P/N: 3000H 112A/

REV
M

PART NO.	MATERIAL	FINISH
3000H 112A	.016 $\pm$.0007 BRASS PRETINNED	SEE MAT'L
3000H 112AB	.016 $\pm$.0007 BRASS	NONE
3000H 112AD	.016 $\pm$.0007 BRASS	POST TIN PLATE

ARK-LES
UNCONTROLLED

				PRINT DIST.	PROD. REL.	SK 0876	4/13/82	CHK'D	TOLERANCES UNLESS OTHERWISE SPECIFIED	Ark-Les CORPORATION STOUGHTON, MA	
					QUOTE REL.	PER JB	10/21/81	DD 6/5/86			
				DEPT	#	DRAWN BY D.O'NEILL 3/16/06		APP.	DECIMALS ±.010	ORIGINAL IF RED	
				ENG	I	SUPERSEDES DWG. DATED: 9/13/01		MSD 6-5-86			
				SALES		SCALE 3:1	DO NOT SCALE PRINT		METRIC ±0.25mm	PART NAME CUSTOMER DRAWING TERMINAL, FEMALE LOCKING TYPE	
M	REV. PER ECR# S000192	6/01/06	DON	STO	X	MATERIAL: SEE TABLE			ANGLES ±1°		
L	REV/REDWN ECR#S000182	3/16/06	DON	RAL					FINISH: SEE TABLE		
REV.	DESCRIPTION	DATE	DR.	JZ							
				CHINA							