

DEPT

1

2

3

4

5

6

7

8

9

10

11

12




NC

JZ



PART NAME: TERMINAL, FEMALE LOCK-IN

PART NO: 3000H118/-6

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H118A-6	.016 ±.0005 THK. BRASS PRETINNED	SEE MAT'L	YES
3000H118AB-6	.016 ±.0005 THK. BRASS	NONE	YES

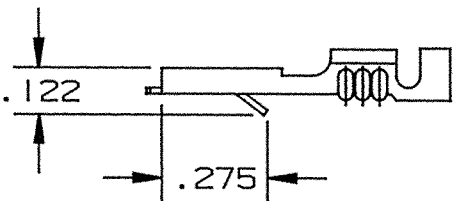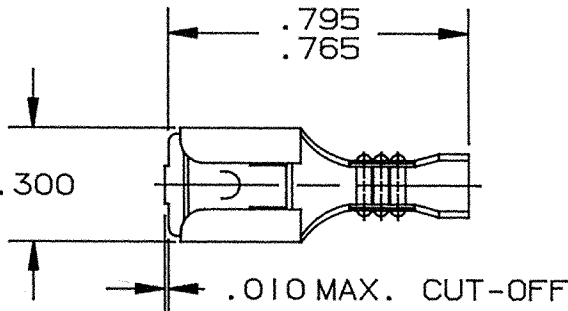

- NOTES:
1. TERMINAL WILL ACCEPT STANDARD .250 X .032 MALE TAB.
 2. TO ACCEPT #18-#24 GAUGE WIRE.
ON 3000H118/-6 U.L. RECOGNIZED #18-#22 GAUGE WIRE.
INSULATION RANGE: .059-.113.
 3. RECOMMENDED STRIP LENGTH: 7/32 ±1/32.
 4. FOR LOOSE PIECE PARTS ADD -1 TO PART NUMBER.
 5. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.

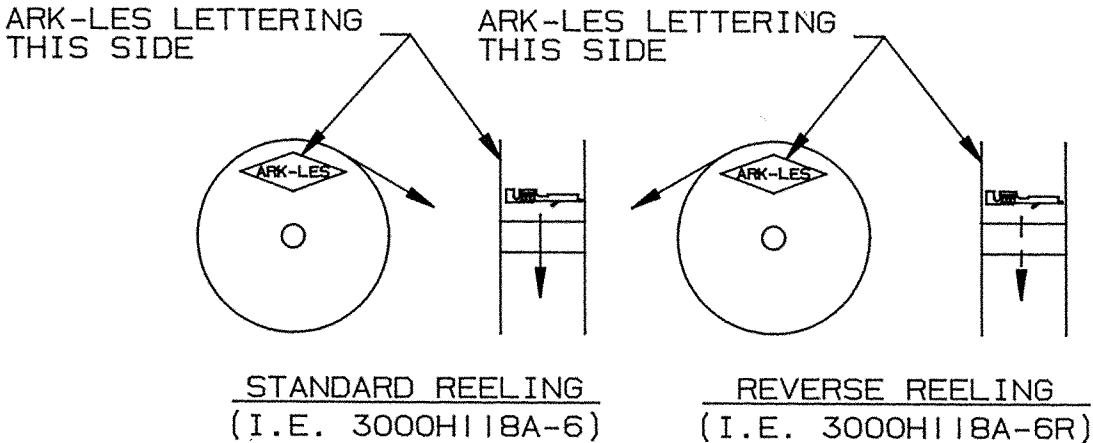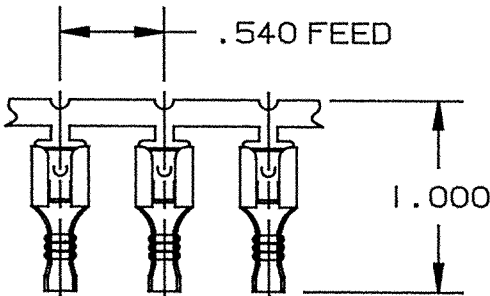

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

FABRICATED TERMINAL STRIP
SCALE: FULL

			PROD. REL.	RB 290	11-7-74	R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
			QUOTE REL.	96634	7-25-74	R.W.	DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
			DR:	M. BUMILA	5-5-92		MATERIAL:		
			CHK'D:	R.W.T.	5-7-92		SEE TABLE		
			APP:	Bishop	5-15-92		FINISH:		
							SEE TABLE		
L	REDRAWN WITHOUT CHANGE PER ECR #9038	5-5-92	M.B.	SUPERCEDES DWG. DATED:	10-4-85		PART NO:		
REV.	DESCRIPTION	DATE	DR.	SCALE: 2X	CAD NO: BT00020		3000H118/-6		

ORIGINAL IF RED