



DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	



PART NAME: PIGGYBACK TERMINAL

PART NO: 3800H74A/

PART NO.	MATERIAL	FINISH
3800H74A	.016 THICK BRASS	PRETINNED
3800H74AB		NONE

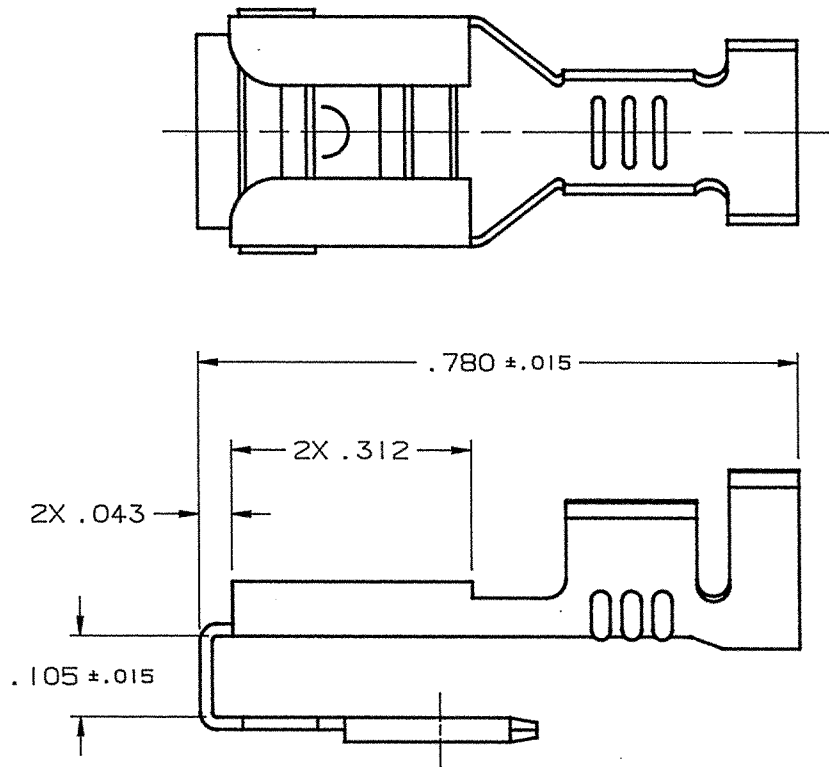

- NOTES:
- 1. TO ACCEPT A .250 X .032 MALE TAB, AND A .187 X .032 FEMALE QUICK-CONNECT.
 - 2. TO ACCOMMODATE #16-#12 GAUGE WIRE.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ± 1/32.
 - 4. INSULATION DIAMETER RANGE: .124 - .158.
 - 5. INSERTION/WITHDRAWAL FORCES TO COMPLY WITH UL 310.
 - 6. FOR LOOSE PIECE PARTS ADD SUFFIX "-IK" TO PART NUMBER (I.E. 3800H74A-1K).
 - 7. FOR STANDARD REELING SEE FIGURE 1.
 - 8. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (I.E. 3800H74AR). SEE FIGURE 2 FOR REELING.
 - 9. ALL CORNERS SHOWN SHARP MAY HAVE A .010 MAX. RADIUS.

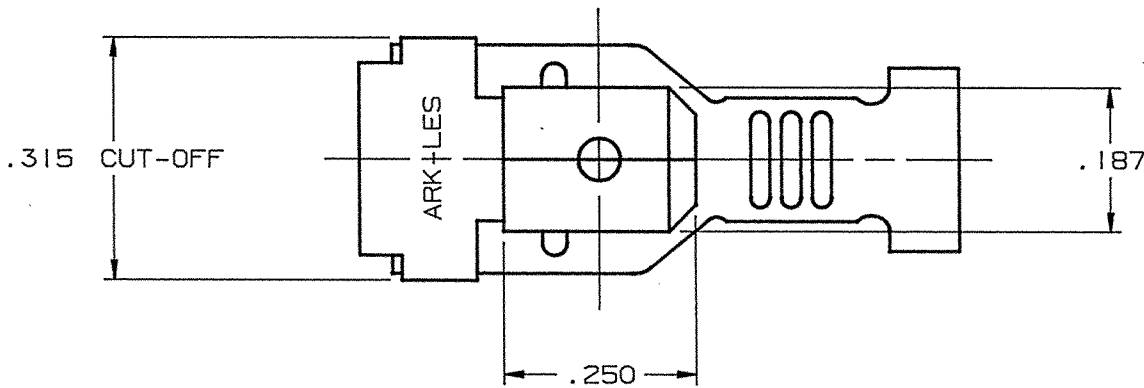

FABRICATED TERMINAL STRIP
SCALE 1=1

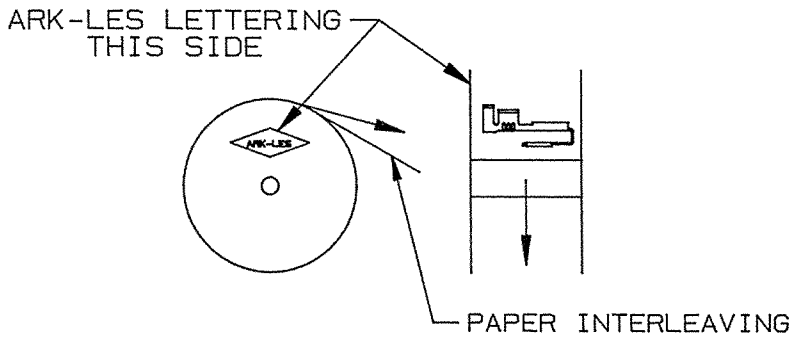


FIGURE 1
STANDARD REELING
(I.E. 3800H74A)

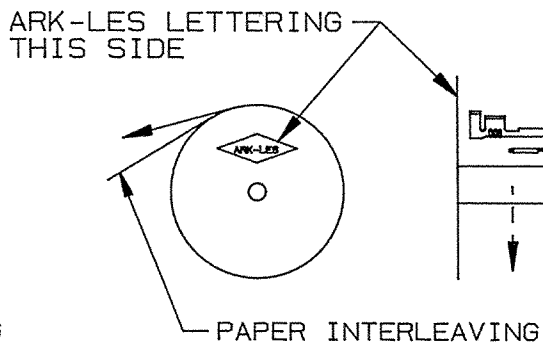


FIGURE 2
REVERSE REELING
(I.E. 3800H74AR)

ARK-LES
UNCONTROLLED

				PROD. REL.	HW 3842	11-18-96	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	B J CARUTHERS		11/5/96	MATERIAL: SEE TABLE		
				CHK'D:	R.W.T.		11-7-96	FINISH: SEE TABLE		
				APP:	COR		11-15-96	PART NO: 3800H74A/		
B.	PROD. REL. PER ECR #11108		11/5/96	BJC	SUPERCEDES DWG. DATED:					
REV.	DESCRIPTION		DATE	DR.	SCALE: 4=1	CAD NO: BVE0015				

ORIGINAL IF RED