



DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: PIGGYBACK TERMINALPART NO: 3800H74A/-4-2

PART NO.	MATERIAL	FINISH
3800H74A-4-2	.016 THICK BRASS	PRETINNED
3800H74AB-4-2		NONE

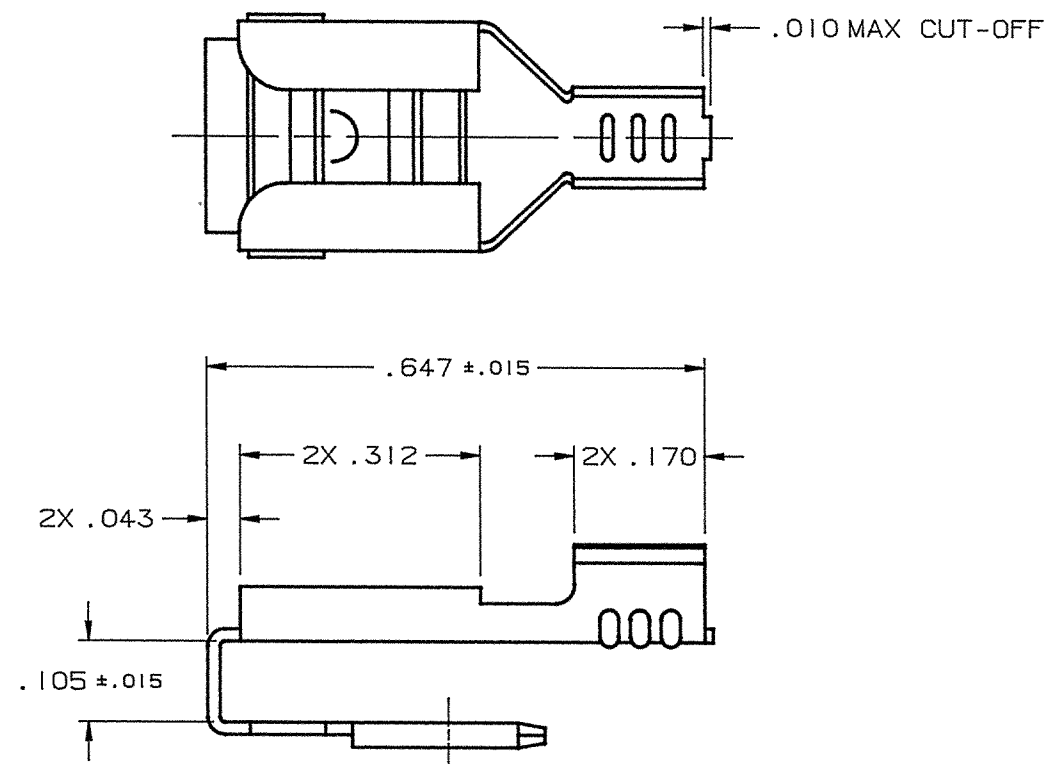

NOTES:

1. TO ACCEPT A .250 X .032 MALE TAB, AND A .187 X .032 FEMALE QUICK-CONNECT.
2. TO ACCOMMODATE #20-#16 GAUGE WIRE.
3. RECOMMENDED STRIP LENGTH: $7/32 \pm 1/32$.
4. INSERTION/WITHDRAWAL FORCES TO COMPLY WITH UL 310.
5. FOR LOOSE PIECE PARTS ADD SUFFIX "-1K" TO PART NUMBER (I.E. 3800H74A-4-2-1K).
6. FOR STANDARD REELING SEE FIGURE 1.
7. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (I.E. 3800H74A-4-2R). SEE FIGURE 2 FOR REELING.
8. ALL CORNERS SHOWN SHARP MAY HAVE A .010 MAX. RADIUS.

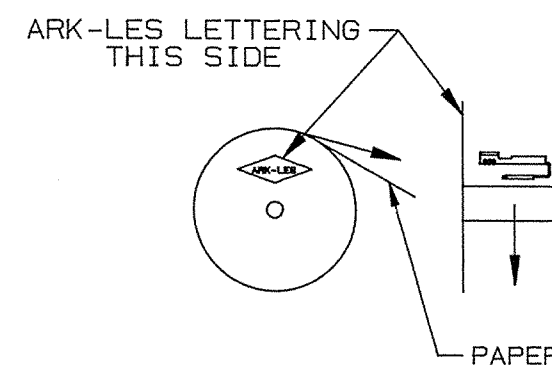
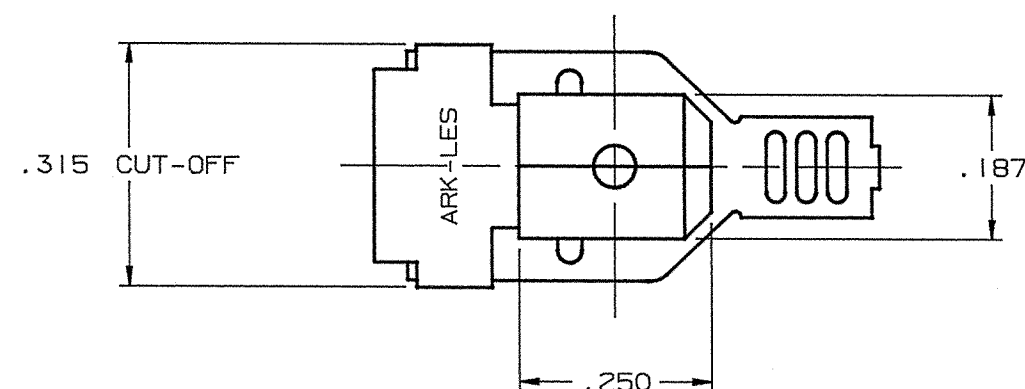


FIGURE 1
STANDARD REELING
(I.E. 3800H74A-4-2)

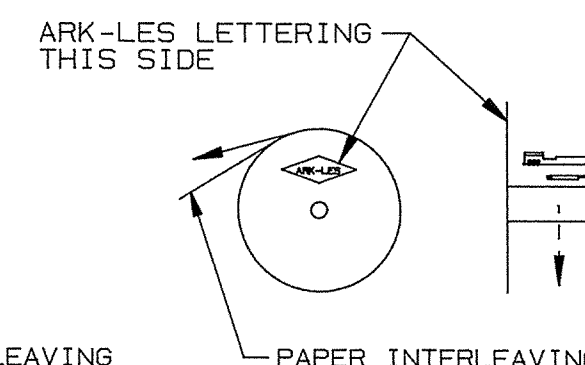



FIGURE 2
REVERSE REELING
(I.E. 3800H74A-4-2R)

FABRICATED TERMINAL STRIP

SCALE 1=1

ARK-LES
UNCONTROLLED

				PROD. REL.	HW 3842	11-18-96	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm
				DR:	B J CARUTHERS	11/5/96		MATERIAL: SEE TABLE	
				CHK'D:	R.W.T.	11-7-96		FINISH: SEE TABLE	
				APP:	COR	11-15-96		PART NO: 3800H74A/-4-2	
B	PROD. REL. PER ECR #11108	11/5/96	BJC	SUPERCEDES DWG. DATED:					
REV.	DESCRIPTION	DATE	DR.	SCALE: 4=1	CAD NO: BVE0018				

ORIGINAL IF RED