

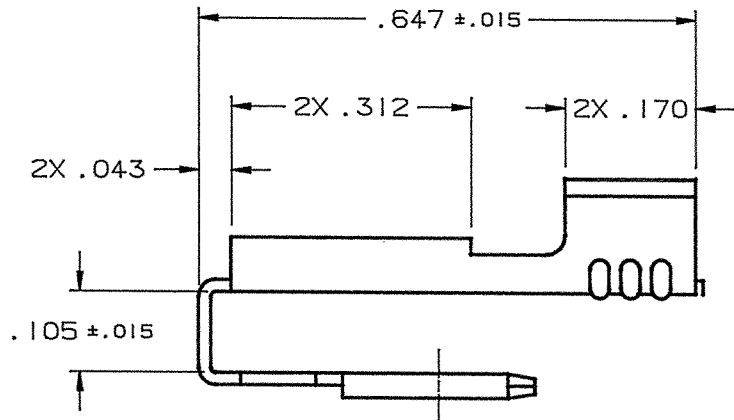


DEPT	
1	1
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	


PART NAME: PIGGYBACK TERMINAL

PART NO: 3800H74A/-5-2


PART NO.	MATERIAL	FINISH
3800H74A-5-2	.016 THICK BRASS	PRETINNED
3800H74AB-5-2		NONE

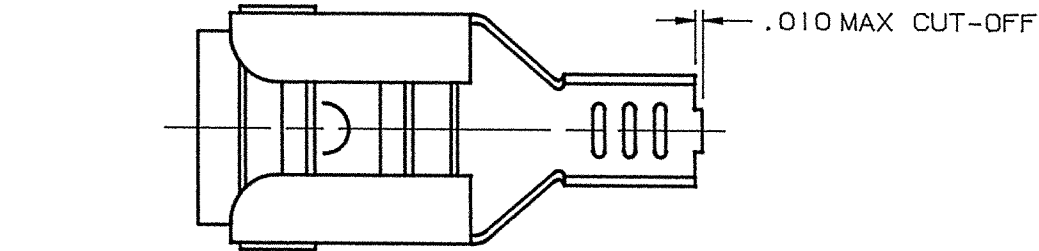



- NOTES:
1. TO ACCEPT A .250 X .032 MALE TAB, AND A .187 X .032 FEMALE QUICK-CONNECT.
 2. TO ACCOMMODATE #18-#14 GAUGE WIRE.
 3. RECOMMENDED STRIP LENGTH: 7/32 ± 1/32.
 4. INSERTION/WITHDRAWAL FORCES TO COMPLY WITH UL 310.
 5. FOR LOOSE PIECE PARTS ADD SUFFIX "-1K" TO PART NUMBER (I.E. 3800H74A-5-2-1K).
 6. FOR STANDARD REELING SEE FIGURE 1.
 7. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (I.E. 3800H74A-5-2R). SEE FIGURE 2 FOR REELING.
 8. ALL CORNERS SHOWN SHARP MAY HAVE A .010 MAX. RADIUS.

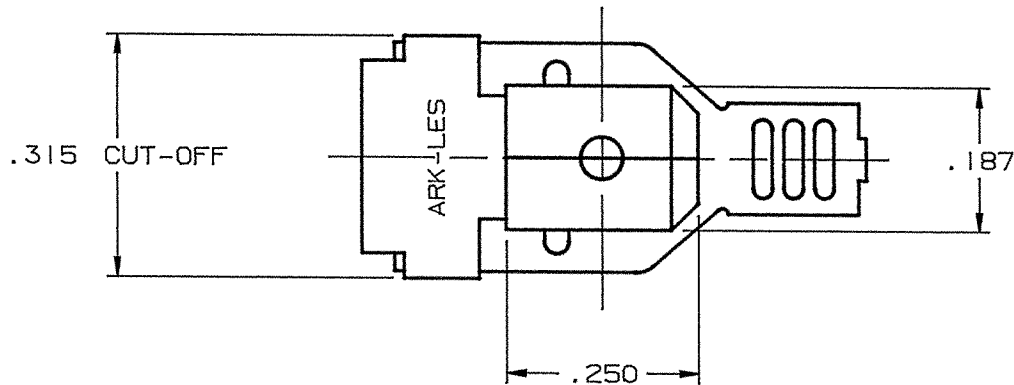

ARK-LES LETTERING
THIS SIDE

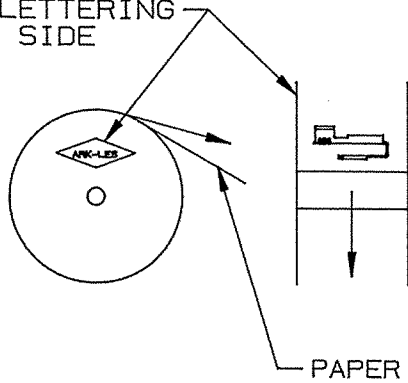

ARK-LES LETTERING
THIS SIDE

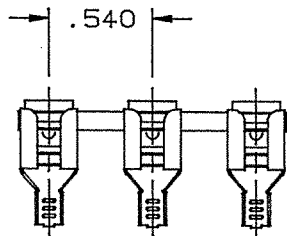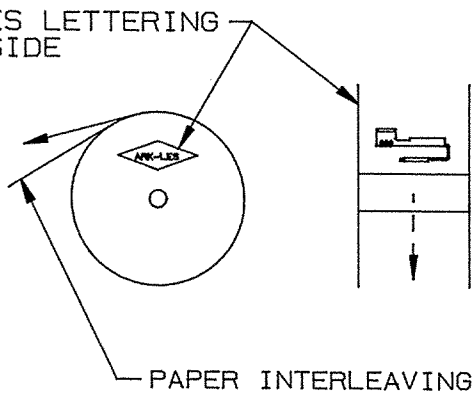

FABRICATED TERMINAL STRIP
SCALE 1=1

ARK-LES
UNCONTROLLED

FIGURE 1
STANDARD REELING
(I.E. 3800H74A-5-2)

FIGURE 2
REVERSE REELING
(I.E. 3800H74A-5-2R)

				PROD. REL.	HW 3842	11-18-96	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm
				DR:	B J CARUTHERS	11/5/96		MATERIAL: SEE TABLE	
				CHK'D:	R/W/T	11-7-96		FINISH: SEE TABLE	
				APP:	cor	11-15-96		PART NO: 3800H74A/-5-2	
B	PROD. REL. PER ECR #11108			11/5/96	BJC	SUPERCEDES DWG. DATED:			
REV.	DESCRIPTION			DATE	DR.	SCALE: 4=1	CAD NO: BVE0020		