

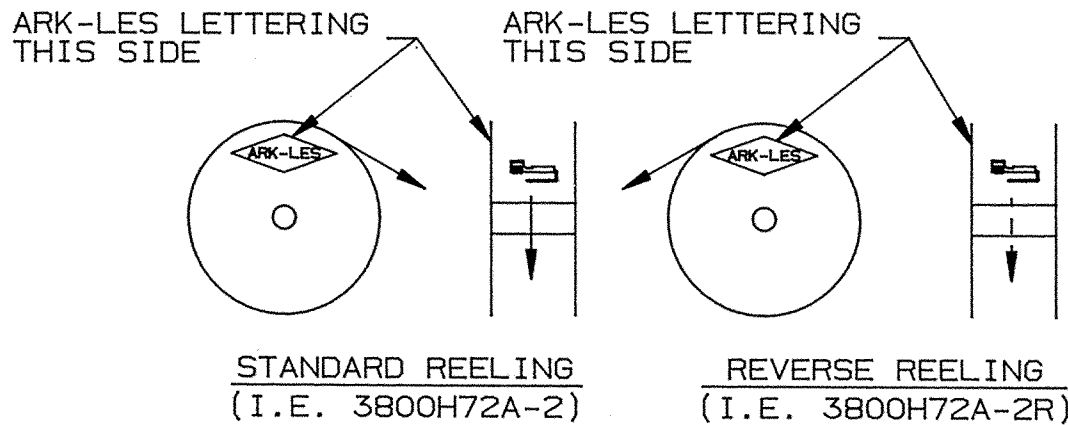
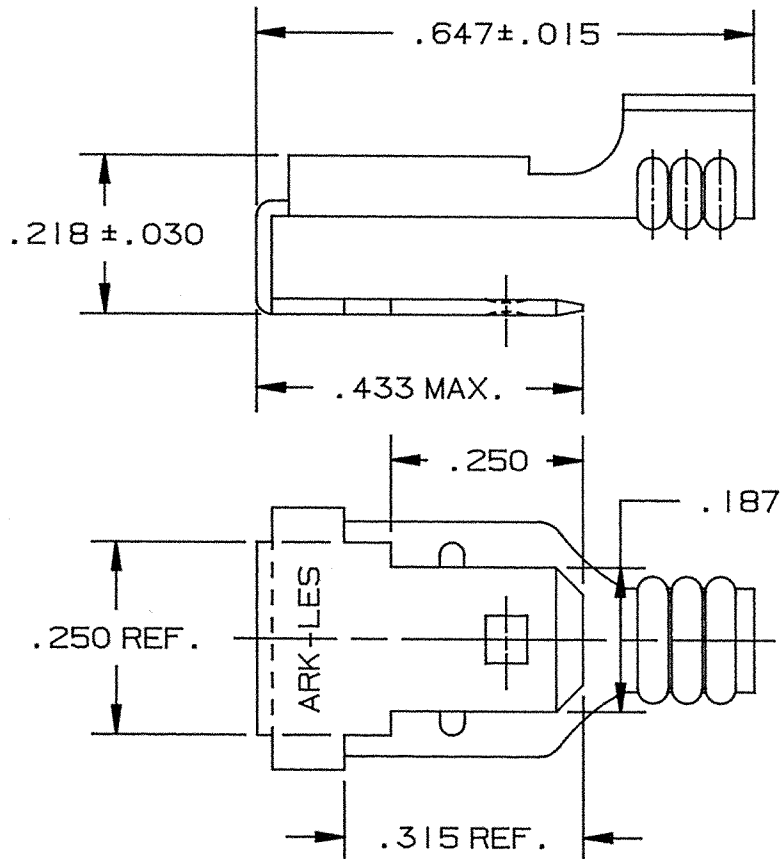


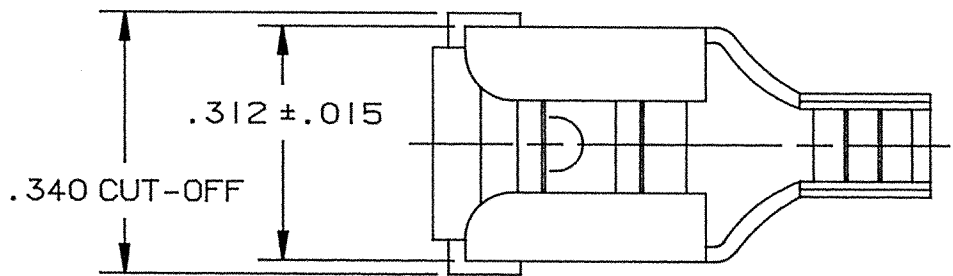

REELING DIAGRAMS

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3800H72A-2	.020 ±.001 TH'K BRASS	PRETINNED	NO
3800H72AB-2	.020 ±.001 TH'K BRASS	NONE	NO

- NOTES:
- 1. TO MATE WITH .250 X .032 MALE TAB AND STANDARD .187 X .020 FEMALE RECEPTACLE.
 - 2. TO ACCOMMODATE #14-#18 GAUGE WIRE.
 - 3. RECOMMENDED STRIP LENGTH: 7/32 ± 1/32.
 - 4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER (I.E. 3800H72A-2R).
 - 5. FOR TERMINALS LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER (I.E. 3800H72A-2-1).
 - 6. FIRST INSERTION TO BE 6.0 - 10.0 LBS. WHEN USING ARK-LES MALE TAB P/N 3000M68H-1 (PLAIN BRASS)) FOR TESTING.
- B

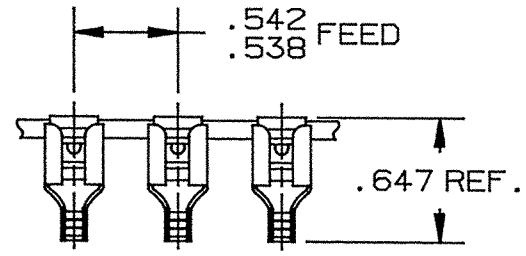

FABRICATED TERMINAL STRIP
SCALE: FULL

				PROD. REL.	JM3245	6-14-93	R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR:	M. BUMILA 5-27-93			MATERIAL:		
				CHK'D:	R.W.T. 5-3-94			SEE TABLE		
B	NOTE #6 ADDED PER ECR #10150		5-2-94	R.T.	APP: COR 5/3/94			FINISH:		
A	PROD. REL. PER ECR #9667		5-27-93	M.B.	SUPERCEDES DWG. DATED:			SEE TABLE		
REV.	DESCRIPTION		DATE	DR.	SCALE: 4X	CAD NO: BVE0011		PART NO: 3800H72A/-2		

A

A