

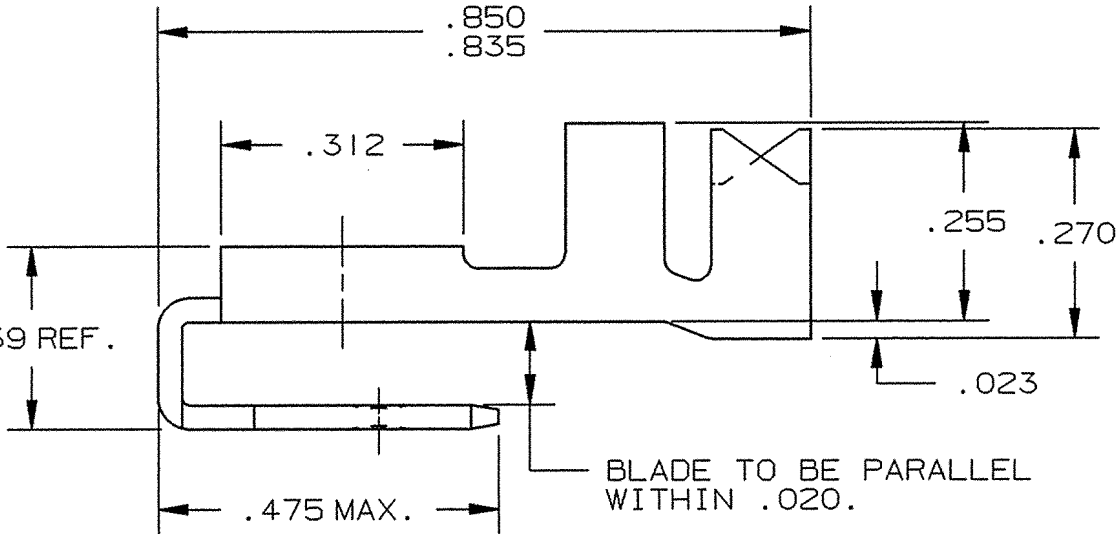
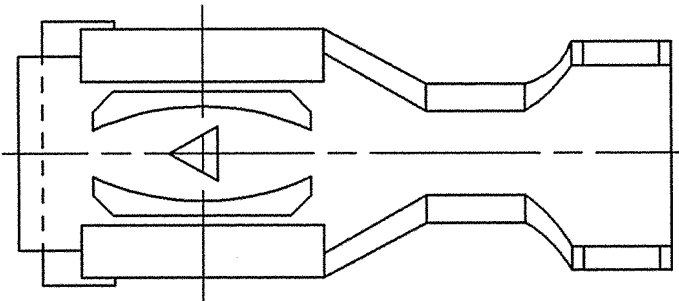


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	


PART NAME: FEMALE & MALE TERMINAL

PART NO: 3000H 21A/-7

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H 21A-7	.032 ±.001 THICK BRASS	PRETINNED	NO
3000H 21AB-7	.032 ±.001 THICK BRASS	NONE	NO

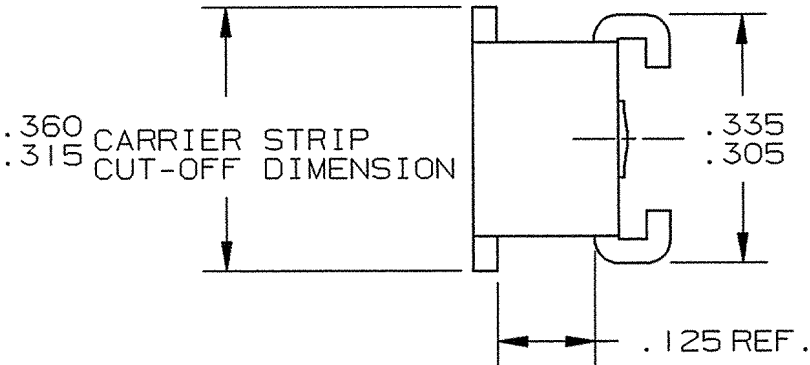


- NOTES:
- 1. TO ACCEPT A .250 X .032 MALE TAB.
 - 2. TO ACCOMMODATE #10-#12 GAUGE WIRE.
 - 3. INSULATION DIAMETER RANGE: .150-.210.
 - 4. RECOMMENDED STRIP LENGTH: 3/16 ± 1/32.
 - 5. FOR PARTS LESS DIMPLE ADD SUFFIX "-3" TO PART NUMBER. (i.e. 3000H 21A-7-3)
 - 6. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER AS SHOWN.
 - 7. FOR LOOSE PIECE PARTS ADD SUFFIX "-1" TO PART NUMBER (i.e. 3000H 21A-7-1).
 - 8. INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M 68H-1:
 - 1ST INSERTION: 15.0 LBS MAX. 6.0 LBS MIN. (GU)
 - 1ST WITHDRAWAL: 17.0 LBS MAX. 6.0 LBS MIN. AVERAGE 4.0 LBS MIN. INDIVIDUAL
 - 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE 4.0 LBS MIN. INDIVIDUAL

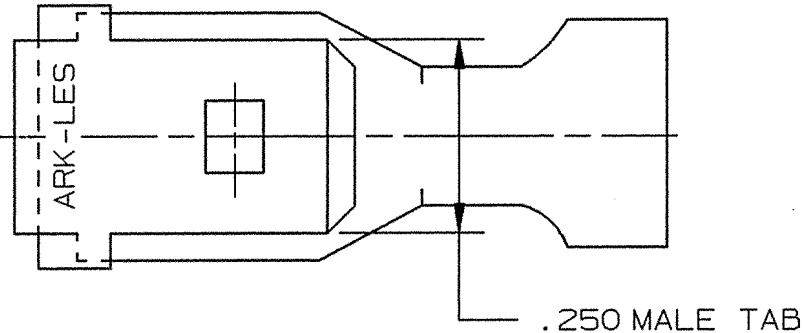

ARK-LES LETTERING THIS SIDE


ARK-LES LETTERING THIS SIDE

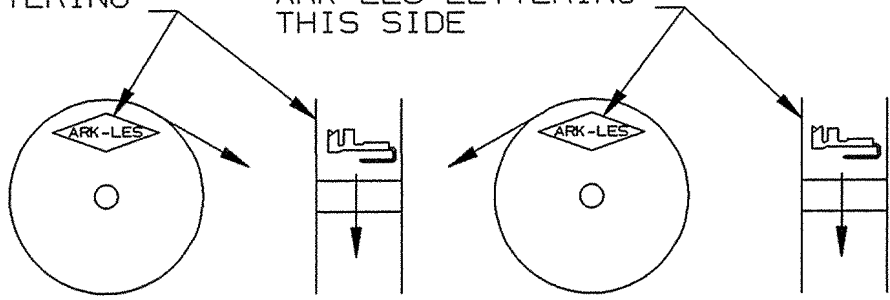

STANDARD REELING (I.E. 3000H 21A-7)

REVERSE REELING (I.E. 3000H 21A-7R)

REELING DIAGRAMS

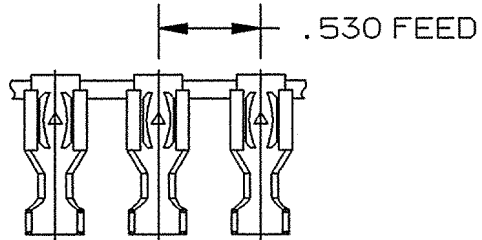

FABRICATED TERMINAL STRIP

SCALE: FULL

				PROD. REL.	JM 3150	2/18/93	RT	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR: R. TASTULA 9/28/00				MATERIAL: SEE TABLE		
				CHK'D: RWT. 6-5-02						
GU	REVISED PER ECR #12298	5/31/02	RT	APP: KTB 6-10-02				FINISH: SEE TABLE		
GT	REV. GT WAS G PER ECR #12077	9/28/00	RT	SUPERCEDES DWG. DATED: 4/5/95				PART NO: 3000H 21A/-7		
REV.	DESCRIPTION	DATE	DR.	SCALE: 4:1		CAD NO: BT00058				

ORIGINAL IF RED