


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME:

SPADE TERMINAL

PART NO:

4000-5A/

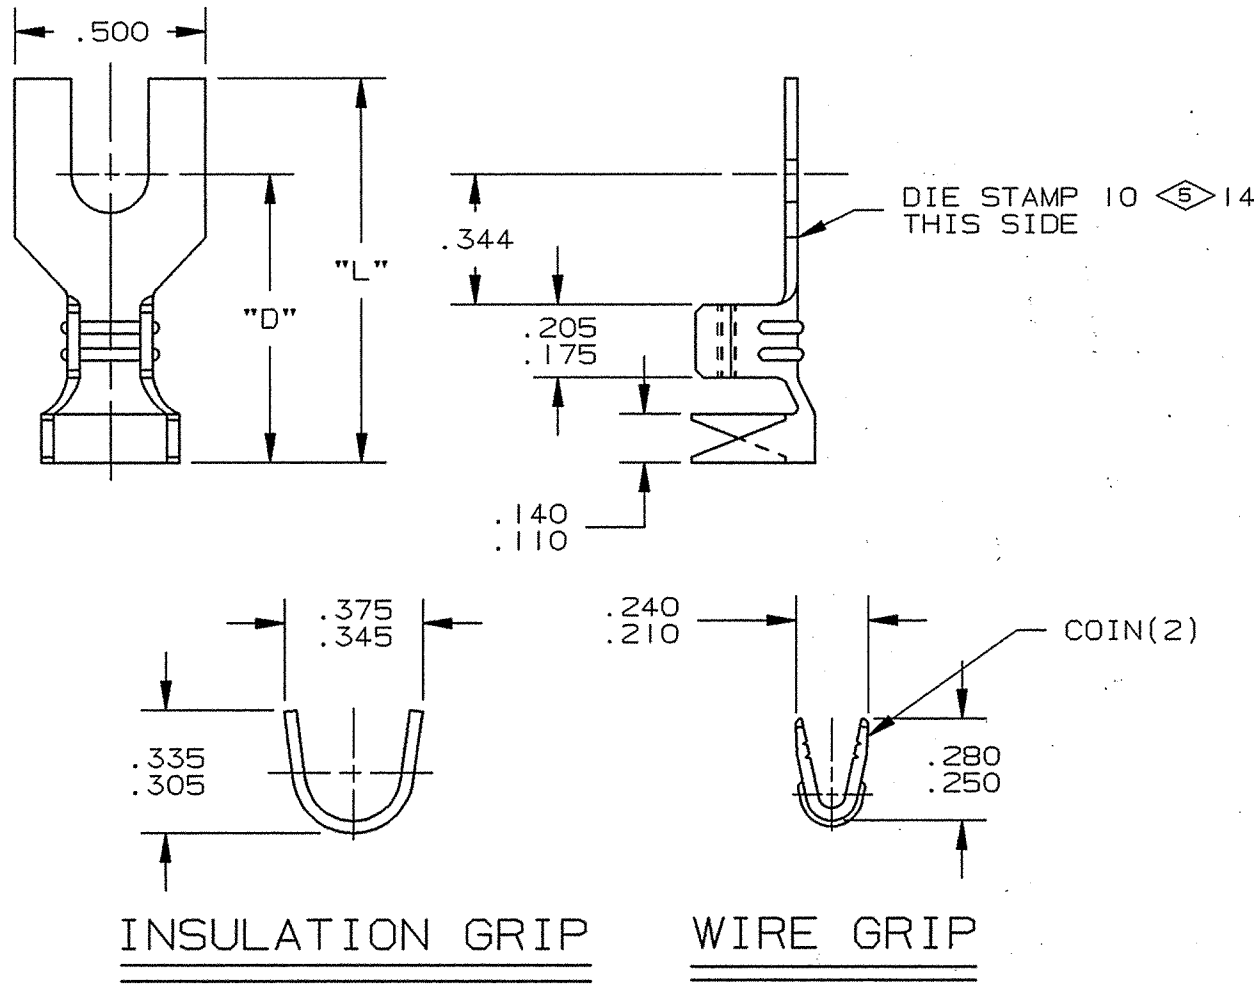


PART NUMBER	INSULATION DIAMETER	STUD SIZE	STOCK THICK. ±.001	MATERIAL & FINISH	DIM. "L"	DIM. "D"
4000-5A3-7	NO INSULATION GRIP	8	.032	BRASS	(.790)	.531
4000-5A4-7				BRASS PRETINNED		
4000-5A3-9	NO INSULATION GRIP	10	.032	BRASS	(.790)	.531
4000-5A4-9				BRASS PRETINNED		
4000-5A3-10	.150-.250	10	.032	BRASS	1.000	.750
4000-5A4-10				BRASS PRETINNED		
4000-5A3-11	NO INSULATION GRIP	1/4	.032	BRASS	(.790)	.531
4000-5A4-11				BRASS PRETINNED		
4000-5A3-12	.150-.250	1/4	.032	BRASS	1.000	.750
4000-5A4-12				BRASS PRETINNED		
4000-5A3-13	NO INSULATION GRIP	5/16	.032	BRASS	(.790)	.531
4000-5A4-13				BRASS PRETINNED		
4000-5A3-14	.150-.250	5/16	.032	BRASS	1.000	.750
4000-5A4-14				BRASS PRETINNED		

(M)

ARK-LES LETTERING THIS SIDE

ARK-LES LETTERING THIS SIDE

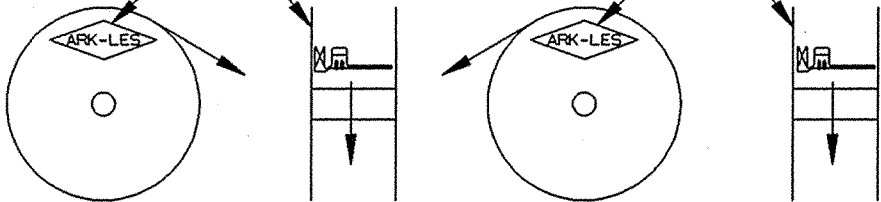

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

- NOTES:
1. WIRE RANGE: #10-#14
 2. RECOMMENDED STRIP LENGTH: 7/32 ±1/32
 3. FEED: .600
 4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 4000-5A3-7R)
 5. FOR TERMINAL LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 4000-5A3-7-1)

				PROD. REL.	PER CA	3-29-61	JER	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR: R. TASTULA	4/24/01			MATERIAL: SEE TABLE		
				CHK'D: R.W.T.	4-27-01			FINISH: SEE TABLE		
				APP: <i>Bush</i>	5-9-01			PART NO: 4000-5A/		
M	REV. M WAS F & REVISED PER ECR #12158	4/24/01	RT	SUPERCEDES DWG. DATED: 11/5/92						
REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BWK0001					

ORIGINAL IF RED