



DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME:

FLANGED SPADE TERMINAL

PART NO:

4000-5B/

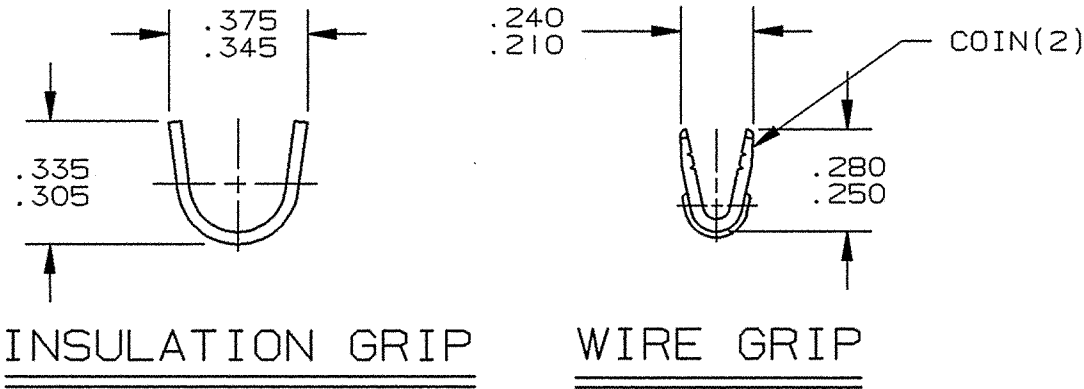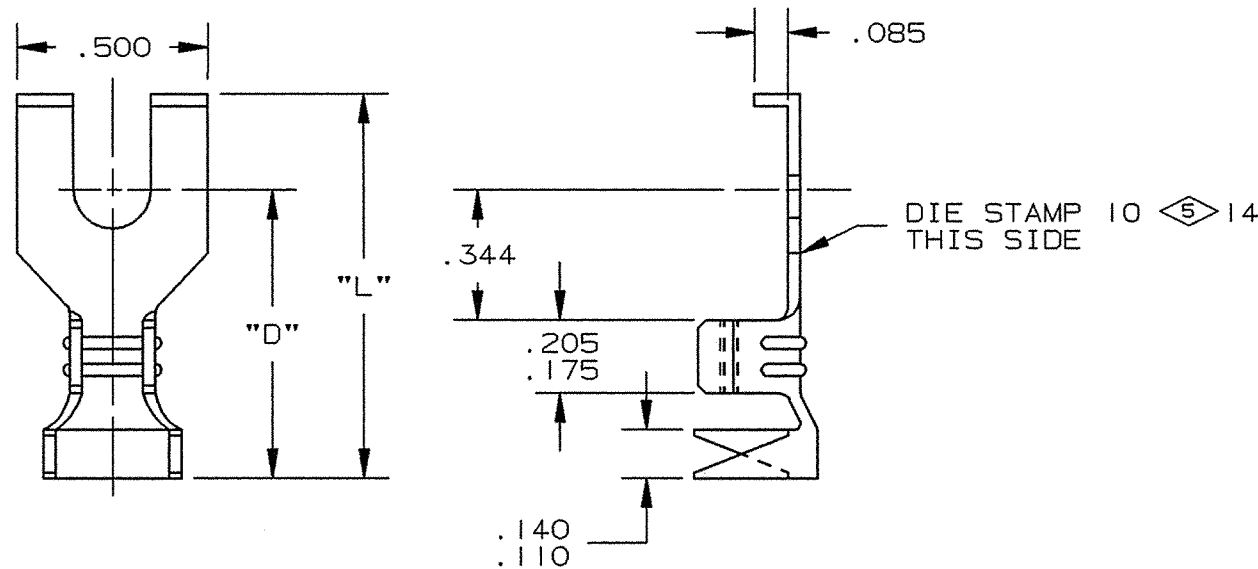


PART NUMBER	INSULATION DIAMETER	STUD SIZE	STOCK THICK. ±.001	MATERIAL & FINISH	DIM. "L"	DIM. "D"
4000-5B3-9	NO INSULATION GRIP	10	.032	BRASS	(.790)	.531
4000-5B4-9				BRASS PRETINNED		
4000-5B3-10	.150-.250	10	.032	BRASS	1.000	.750
4000-5B4-10				BRASS PRETINNED		
4000-5B3-11	NO INSULATION GRIP	1/4	.032	BRASS	(.790)	.531
4000-5B4-11				BRASS PRETINNED		
4000-5B3-12	.150-.250	1/4	.032	BRASS	1.000	.750
4000-5B4-12				BRASS PRETINNED		

ARK-LES
UNCONTROLLED

- NOTES:
1. WIRE RANGE: #10-#14
 2. RECOMMENDED STRIP LENGTH: 7/32 ±1/32
 3. FEED: .600
 4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 4000-5B3-10R)
 5. FOR TERMINAL LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 4000-5B3-10-1)

ARK-LES LETTERING THIS SIDE

ARK-LES LETTERING THIS SIDE

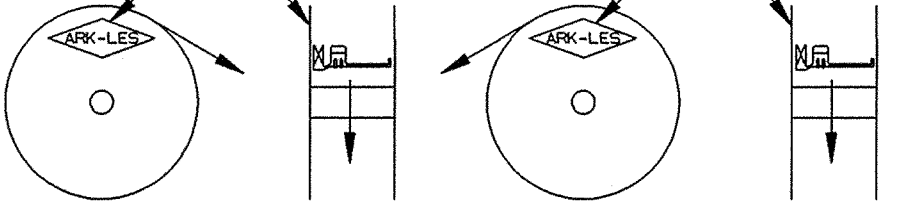

STANDARD REELING
(I.E. 4000-5B3-10)

REVERSE REELING
(I.E. 4000-5B3-10R)

REELING DIAGRAMS

REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BWL0001	PART NO: 4000-5B/
L	REV. L WAS F, & REVISED PER ECR #12158	4/25/01	RT	SUPERCEDES DWG. DATED: 11/6/92		
				PROD. REL. PER CA 3/29/61 JER	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
				QUOTE REL.	DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°	
				DR: R. TASTULA 4/25/01	MATERIAL: SEE TABLE	
				CHK'D: R.W.T. 4-27-01	FINISH: SEE TABLE	
				APP: [Signature] 5-6-01		

ORIGINAL IF RED