
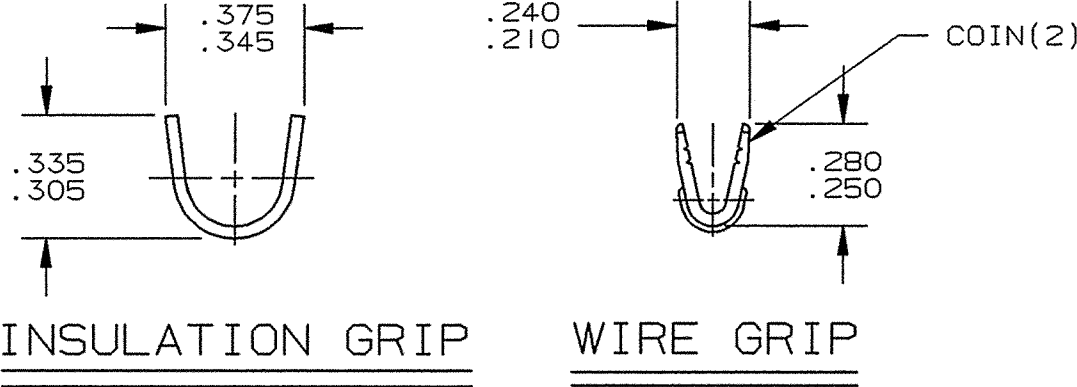


DEPT	
1	1
2	
3	
4	2
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: NOTCHED SPADE TERMINAL

PART NO: 4000-5C/

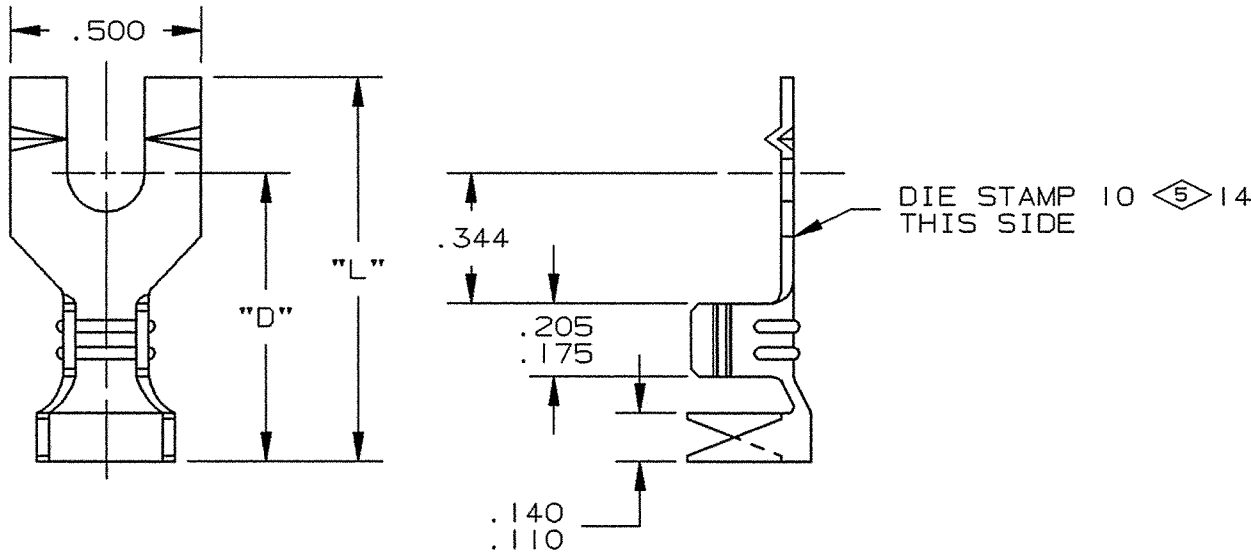


PART NUMBER	INSULATION DIAMETER	STUD SIZE	STOCK THICK. ±.001	MATERIAL & FINISH	DIM. "L"	DIM. "D"
4000-5C3-9	NO INSULATION GRIP	10	.032	BRASS	(.790)	.531
4000-5C4-9				BRASS PRETINNED		
4000-5C3-10	.150-.250	10	.032	BRASS	1.000	.750
4000-5C4-10				BRASS PRETINNED		
4000-5C3-11	NO INSULATION GRIP	1/4	.032	BRASS	(.790)	.531
4000-5C4-11				BRASS PRETINNED		
4000-5C3-12	.150-.250	1/4	.032	BRASS	1.000	.750
4000-5C4-12				BRASS PRETINNED		

(K)

ARK-LES
UNCONTROLLED

- NOTES:
1. WIRE RANGE: #10-#14
 2. RECOMMENDED STRIP LENGTH: 7/32 ±1/32
 3. FEED: .600
 4. FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (I.E. 4000-5C3-10R)
 5. FOR TERMINAL LOOSE PIECE ADD SUFFIX "-1" TO PART NUMBER. (I.E. 4000-5C3-10-1)

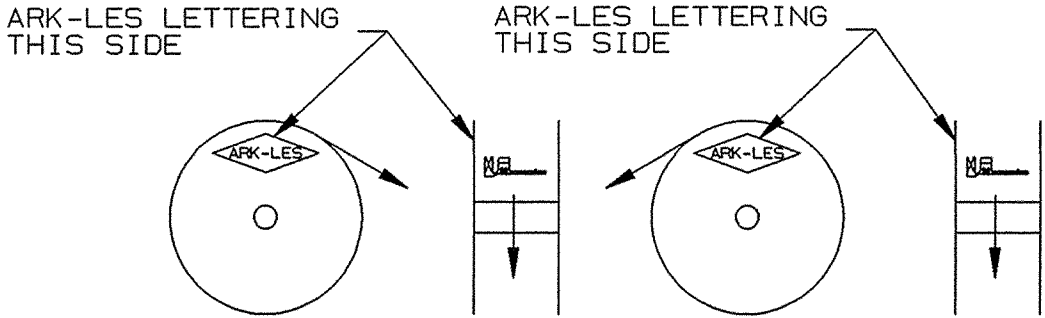

STANDARD REELING (I.E. 4000-5C3-10) REVERSE REELING (I.E. 4000-5C3-10R)

REELING DIAGRAMS

				PROD. REL.	PER CA	3/29/61	JER	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
				QUOTE REL.				DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
				DR: R. TASTULA 4/25/01				MATERIAL: SEE TABLE		
				CHK'D: R.W.T. 4-27-01						
				APP: <i>[Signature]</i> 5-9-01				FINISH: SEE TABLE		
K	REV. K WAS E & REVISED PER ECR #12158		4/25/01	RT	SUPERCEDES DWG. DATED: 12/29/86					
REV.	DESCRIPTION		DATE	DR.	SCALE: 2:1	CAD NO: BWM0001		PART NO: 4000-5C/		

ORIGINAL IF RED