

3.3V Surface Mount 7.5x5mm Crystal Clock Oscillator HSM9

CONNOR WINFIELD



Features:

- 1.0 to 170 MHz
- 3.3V Operation
- RoHS Compliant
- Tri-State Enable/Disable
- Power Saving Function: 10uA When Disabled
- Overall Frequency Tolerance:
 - HSM943 ± 20 ppm, HSM913 ± 25 ppm
 - HSM923 ± 50 ppm, HSM933 ± 100 ppm
- Temperature Range: -10 to 70°C
- Ceramic Surface Mount Package
- Tape and Reel Packaging

The Connor-Winfield HSM943, HSM933, HSM923, and HSM913 are 7.5mm x 5mm, 3.3V LVC MOS, Surface Mount, Fixed Frequency Crystal Oscillators (XO) designed for use in all applications requiring precision clocks. The RoHS compliant surface mount package is designed for high-density mounting and is optimum for mass production

Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-55	-	125	°C	
Supply Voltage (Vcc)	-0.5	-	5.0	Vdc	

Operating Specifications

Parameter	Minimum	Nominal	Maximum	Units	Notes
Frequency Range (Fo)	1.0	-	125 & 155.52	MHz	
HSM943			125		
HSM913			170		
HSM923			170		
HSM933			170		
Frequency Tolerance	-	-	-	ppm	1
HSM943	-20		20		
HSM913	-25		25		
HSM923	-50		50		
HSM933	-100		100		
Operating Temp Range	-10	-	70	°C	
Supply Voltage (Vdd)	2.97	3.3	3.63	Vdc	
Supply Current (Icc)	-	-	-	mA	
1.000 to 31.999 MHz			15		
32 to 49.999 MHz			20		
50 to 66.999 MHz			25		
67 to 124.999 MHz			40		
125 to 170 MHz			50		

Input Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Enable Voltage - (Vih)	≥ 70% Vdd	-	-	Vdc	2
Disable Voltage - (Vil)	-	-	≤ 30% Vdd	Vdc	
Enable Time	-	-	10	mS	
Disable Time	-	-	150	nS	
Output Disable Current (Icc)	-	-	10	uA	

LVC MOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load	-	15	pF		
Voltage High (Voh)	2.91	-	-	Vdc	
Low (Vol)	-	-	0.33		
Current High (Ioh)	-4	-	-	mA	
Low (Iol)	-	-	4		
Duty Cycle at 50% of Vcc	45	50	55	%	
Rise / Fall Time: 20% to 80%				nS	
1.000 to 19.999 MHz	-	3.0	6.0		
20.00 to 49.999 MHz	-	2.0	4.0		
50.00 to 99.9999 MHz	-	1.5	3.0		
100.00 to 170 MHz	-	0.5	1.0		
Start-Up Time	-	-	10	mS	
Jitter (10 Hz to 20 MHz)	-	-	5	pS RMS	
(12 kHz to 20 MHz)	-	-	1	pS RMS	

Notes:

1. Inclusive of calibration @ 25°C, frequency vs temperature stability, supply voltage change, load change, shock and vibration, 15 years aging.
2. Oscillator output is enabled with no connection on pad 1

Specifications subject to change without notice. All dimensions in inches. © Copyright 2012 The Connor-Winfield Corporation

2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com
US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221



Bulletin **Sm007**
Page **1 of 2**
Revision **31**
Date **27 March 2012**

Package Characteristics

Package Hermetically sealed ceramic package and metal cover

Environmental Characteristics

Temperature Cycle The specimen shall meet electrical characteristics after tested 5 cycles of -55°C / 30 minutes and +125°C / 30 minutes
Hermetical No bubbles appear in Flourinert (FC-43) at 125°C ±5°C for 5 minutes
Solvent Resistance Marking will withstand immersion in Isopropyl Alcohol or Trichloroethylene

Soldering

General Conditions 260°C max x 10 sec max x 2 times max or 230°C max x 180 sec max x 1 time

Typical Operation Data (Vapor phase reflow)
20 to 100 sec up to 215°C, 50 sec
at 215°C, then down to room temperature per 1 to 5°C / sec

Mechanical Characteristics


Free Drop The specimen shall meet electrical characteristics after tested 3 times, Free Drop testing on the hard wooden board from a height of 75 cm.

Vibration The specimen shall meet electrical characteristics after tested by the following conditions: 10-55Hz 1.5mm Amplitude, 55-2000 Hz 20 G's, 2 hours for each plane

Thermal Shock After applied Thermal Shock of 260°C max x 10 sec max x 2 times, or 230°C max x 180 sec max, the specimen shall meet electrical characteristics

Solderability (EIAJ-RCX-0102.101 Condition 1a)
1) Flux: MIL-F-14256 (WW Rosin=25%, Isopropyl Alcohol = 75%)
2) Solder: QQ-S-571 (Sn = 63%, Pb = 37%)
3) Solder bath temperature: 235°C ±5°C
4) Depth of immersion: Up to electrical terminal
5) Immersing time: Within 2 sec ±0.5 sec into solder bath


After performing the above procedures, a newly soldered coverage shall be greater than 90%

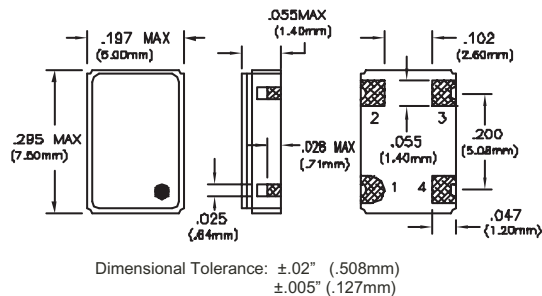

Pin Connections


- 1: Tri-State E/D
- 2: Ground
- 3: Output
- 4: VDD

Suggested Pad Layout




Bypass capacitor, C-by, should be ceramic capacitor ≥ .01uf.

Test Circuit

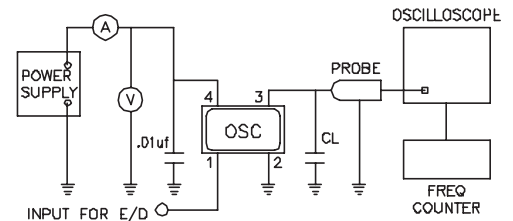

Output Waveform

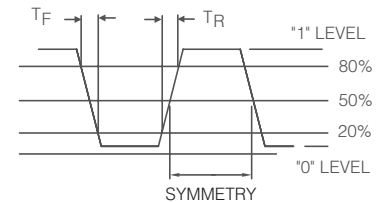

Marking Information

Part Number	Marking Variations
HSM913	SM913XX HM913XX
HSM923	HSM923XX HM923XX
HSM933	HSM933XX HM933XX
HSM943	HSM943XX HM943XX

XX = Date Code

Ordering Information

HSM943 - 125.0M

CLOCK SERIES

CENTER FREQUENCY

Bulletin **Sm007**
Revision **31**
Date **27 March 2012**

Tape and Reel Dimensions

