


RoHScompliant:

DIMENSIONS

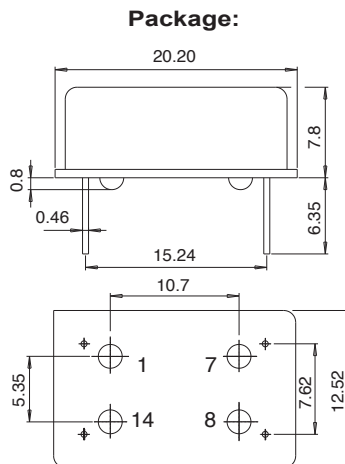

Pin out

Pin 1 = Voltage control
Pin 7 = Gnd
Pin 8 = Fout
Pin 14 = Vdd

All dimensions in mm typical

Oven control quartz crystal oscillator
Fundamental mode frequency
High shock and vibration resistance
Wide temperature range
Low aging
Customer specification on request
Very fast warm up
Low power consumption
Swiss made quality

DESCRIPTION:

This DIL 14 package has been specially designed for the applications:

- Digital switching
- Telecom transmission
- Sonet / SDH / DWDM / FDM/36 / WIMAX
- Airbone equipments
- Battery operated systems
- Instrumentation
- Radio Transceiver

The OCXO are supplied on trays (50 pcs/tray).

ELECTRICAL CHARACTERISTICS 25°C

Frequency versus temperature A: 0 to +60°C B: -20 to +70°C C: -40 to +85°C E: -55 to +85°C	$\Delta F/F$	see table 1 (without air flow)		
Frequency long term aging 1) long term aging 10 years long term aging 1 st year	$\Delta F/F$	< ± 2.5 $\leq \pm 0.3$		ppm
Frequency control range	Vc	$\geq \pm 2.5$ (see table 3)		ppm
Supply voltage	Vdd	3.3 / 5 / 12		V
Input current	Idd	see table 2		
Output signal		HC-MOS compatible		
Symmetry at Vdd/2		40 / 60		%
Rise & fall time (without load)		≤ 7		nS
Level "0" & "1"		<0.4V> Vcc-0.5		V
Start-up time	t	<5		ms
Load min / max		3/47		pF
Frequency stability versus load $\pm 10\%$	$\Delta F/F$	$\leq \pm 10$		ppb
Warm-up within ± 0.1 ppm at 25°C	Vdd	3.3	5	12
	t	≤ 120	≤ 60	≤ 30
Stability versus Vdd	$\Delta F/F$	< ± 0.1		ppm
Short term stability 0.1 to 30s 5E-11 typ at 1s	Tau	< 5		E-10
Phase noise typical at 10 MHz Static conditions		3.3 / f5V		12V
BW = 1Hz		-100		-90
10Hz		-130		-120
100Hz		-140		-130
1 kHz		-145		-135
10 kHz				

1) < ± 1 E-9 / day after 30 days operating

TABLE 1: Vdd = 3.3V

Operating Temperature range	Vdd = 3.3V ± 0.15V	
	Version standard	Version high stability
A = 0 to +60°C	≤ ± 75 ppb	≤ ± 50 ppb
B = -20 to +70°C	≤ ± 150 ppb	≤ ± 75 ppb
C = -40 to +85°C	≤ ± 250 ppb	≤ ± 100 ppb

TABLE 1: Vdd = 5V

Operating Temperature range	Vdd = 5V ± 0.2V	
	Version standard	Version high stability
A = 0 to +60°C	≤ ± 50 ppb	≤ ± 25 ppb
B = -20 to +70°C	≤ ± 100 ppb	≤ ± 50 ppb
C = -40 to +85°C	≤ ± 150 ppb	≤ ± 100 ppb
E = -55 to +85°C	≤ ± 400 ppb	≤ ± 200 ppb

TABLE 1: Vdd = 12V

Operating Temperature range	Vdd = 12V ± 0.5V	
	Version standard	Version high stability
A = 0 to +60°C	< ± 50 ppb	≤ ± 25 ppb
B = -20 to +70°C	≤ ± 100 ppb	≤ ± 50 ppb
C = -40 to +85°C	≤ ± 150 ppb	≤ ± 100 ppb
E = -55 to +85°C	≤ ± 400 ppb	≤ ± 200 ppb

TABLE 2: Idd

Temperature	Vdd = 3.3V	Vdd = 5V	Vdd = 12V
25°C -20°C	120 mA 170 mA	80 mA 120 mA	50 mA 80 mA
start-up current at 25°C ≤ 250mA duration	30s	10s	10s

TABLE 3:

Frequency control adjustment response slope positive	Vdd = 3.3V	Vdd = 5V	Vdd = 12V
Voltage control input impedance > 47kΩ	0 to 3.3V	0.5 to 5V	0.5 to 5V
Resistor control R connect pin 1 to ground (Input impedance > -4,7kΩ)	0 to 10kΩ	0 to 10kΩ	0 to 10kΩ

STANDARD FREQUENCIES:

Frequency «MHz»						
10	12	12.8	14.7456	16	20	26
40	52	54				
Other frequencies from 10 kHz up to 54 MHz on request						

**ENVIRONMENTAL
CHARACTERISTICS:**

Storage temp. range	-55 to +125°C
Vibration resistance	10 to 2000Hz / 20g
Shocks resistance	5000g / 0.3ms / ½ sine

**TERMINATIONS AND
PROCESSING:**

Pin soldering	+235°C / 10s max +260°C / 5s max
Package SMD version option D1 or D2 see application note	Dil 14.4 pins GND to case height = 8mm

**PRODUCT DESCRIPTION AND
ORDERING INFORMATION:**

SCOCXO

W = Vdd 3.3V

V = Vdd 5V

blank = Vdd 12V

T = high stability

blank = standard stability

A = 0 to +60°C

B = -20 to +70°C

C = -40 to +85°C

E = -55 to +85°C

X = custom

R1 = R = 0 to 10kΩ

V3 = Vc = 0 to 3.3V

V5 = Vc = 0.5 to 5V

Y = custom

Frequency

V

T

-

C

V5

20MHz

XXX

customer spec N°

A unique part number will be generated for each product specification, i.e:
20xxxx-EA00 (in ESD plastic tray)
 Please contact us.

All specifications subject to change without notice.



Micro Crystal AG
 Mühlestrasse 14
 CH-2540 Grenchen
 Switzerland

Tel. +41 32 655 82 82
 Fax +41 32 655 80 90
sales@microcrystal.com
www.microcrystal.com