




100% Leadfree, RoHscompliant:

DIMENSIONS

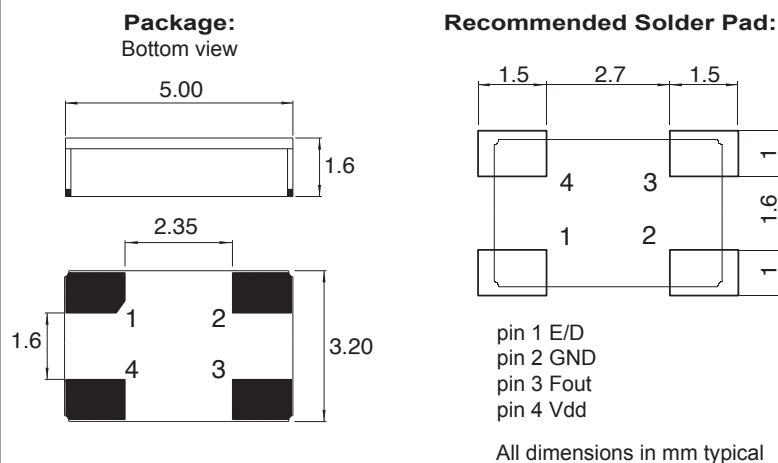

SMT Clock oscillator in ceramic package
Fundamental quartz mode frequency
High shock and vibration resistance
Wide temperature range
Low aging
Ultra low MSL
Very fast start-up
Excellent solderability
Swiss made quality
Customer specification on request

DESCRIPTION:

This SMD oscillator in ceramic package has been specially designed for surface mount using infrared, vapor phase or epoxy techniques.

APPLICATIONS:

- Avionics
- Airborne equipments
- Remote control
- Security application
- Radio Transceiver
- Microprocessor clocks

The MCSO2's are supplied on trays (128 pcs / tray)

For pick-and-place equipment, the parts are available in 12mm tapes with 250 parts min

1000 parts min

ELECTRICAL CHARACTERISTICS AT +25°C

Frequency stability Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 10 years over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 100$	ppm
Frequency stability version T Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 1 year over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 50$	ppm
Supply voltage ± 5% 1)*	Vdd	2.5 / 3.3	V
Input current	Idd	see table 1	
Output signal		HC-MOS compatible	
Symmetry at Vdd/2		40 / 60	%
Rise & fall time ≤ 20MHz For F=32.768 kHz rise & fall time ≤ 150ns (load 15pf 20% to 80%)		≤ 7	ns
Rise & fall time ≥ 20MHz (load 15pf 10% to 90%)		≤ 3	ns
Level "0" & "1"		<0.4>Vdd-0.5	V
Start-up time	t	<5	ms
Load min / max		3/47	pF
Jitter ≤ 20MHz one sigma		< 2rms	ps
Jitter > 20MHz one sigma		< 10rms	ps

* 1) C = 47nF ceramic must be connected between GND & Vdd

**TABLE 1: Idd
(Without load)**

Frequency	Fz 32 kHz	F=< 10MHz	≤ 20MHz	>20 to 160MHz
W= Vdd = 2.5V	< 300μA	< 2mA	< 3mA	< 25mA
V= Vdd = 3.3V	< 1mA	< 4mA	< 5mA	< 30mA

STANDARD FREQUENCIES:

Frequency «MHz»						
3.6864	4	8	10	12	12.8	14.7456
16	20	24	40	48	120	
Other frequencies from 10 kHz up to 225 MHz on request						

**ENVIRONMENTAL
CHARACTERISTICS:**

Storage temp. range	-55 to +125°C
Vibration resistance	10 to 2000Hz / 20g
Shocks no resistance	5000g / 0.3ms / ½ sine

**TERMINATIONS AND
PROCESSING:**

Reflow soldering	+260°C / 10s max
Package	Ceramic 5 x 3.2 x 1.6
Lids	Ceramic
Terminations option T3 on request	with tinned Ag/Cu/Zn
E/D option 1 on request Reaction time < 1μs	Pin 1 open → Pin 3 Clock H → Clock L → Low

- No power E/D function (pin 1) before Vdd is setting on
- E/D option not available for F < 500 kHz
- E/D option on request (very low consumption in disable mode).

**PRODUCT DESCRIPTION AND
ORDERING INFORMATION:**

MCSO2F H V T - C 48MHz				E/D	T3	XXX
H	> 20MHz					
blank	≤ 20MHz			option 1 E/D enable / disable		
W	= Vdd 2.5V				option 2 blank Au plated	
V	= Vdd 3.3V				T3 = tinned	
T	= ±50ppm					customer spec N°
blank	= ±100ppm					
A	= 0 to +70°C					
B	= -40 to +85°C					
C	= -55 to +125°C					
X	= custom					
Frequency						
A unique part number will be generated for each product specification						
20xxx-EA00				xxx pcs (in ESD plastic tray)		
200xxx-ML00				xxx pcs (in tape & reel, any quantity)		

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com